

INDUSTRIAL STRENGTH... Start Your Application From **YOURITECH**

Integration support

Obsolescence Management

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Cover glass

System solutions

OEM Solutions

Custom Display

PCAP

Mechanical design

Production Custom designs Installation



**Product
Datasheet**

ET068DH1248-DC Datasheet V1.0

ISO9001:2015 Quality System Certification

Customer			
Keywords	DH series, 6.8 inch, 1280*480, with configuration, LUA script,Audio, video, U disk, WIFI, CAN, IPS screen		
Model	ET068DH1248-DC		
Signature of Customer		Signature of Engineer	
Date		Date	2024.09.14



Version Record

Version	Date	Reason for modify	Page	Written by	Reviewers	Approver
V1.0	2024/09/14	File creation	all			



Catalog

1. Introduction of Hardware	4
1.1 Product Appearance	4
1.2 Hardware configuration	4
1.3 Pin Definition	5
1.4 Debugging tool	5
2. Product Structure	4
3. Product Specification	5
4. Product Dimensions	11
5. Reliability Test	12
5.1 ESD Test	12
5.1.1 Executive Standard	12
5.1.2 Test Ambient	12
5.1.3 Test Data	13
5.2 High and Low Temperature Aging Test	13
5.2.1 Test environment	13
5.2.2 Test data	14
5.3 Group Pulse Test	14
5.3.1 Executive Standard	14
5.3.2 Test environment	14
5.3.3 Test Data	15
5.4 Radiation Test	16
5.4.1 Executive Standard	16
5.4.2 Test environment	16
5.4.3 Test Data	16
7. Protocol Configuration	18
7.1 What is a virtual serial screen	18
7.2 Keil is bound and debugged with the virtual serial port screen	18
8. Protocol Configuration	21
9. LUA Script Configuration	22
11. Packaging and Physical Dimensions	25
12. Disclaimer	26



1. Introduction of Hardware

This section describes some of the product's appearance reference diagrams, hardware configuration diagrams, pin definitions, and tools required for debugging.

1.1 Product Appearance

The following is a reference drawing of the appearance of a product of this size, as shown in Figure 1-1.

Note: The company does not initiate changes to the outside world without involving key structural process modifications or layout adjustments, only changes and iterations in product process or reliability, and the specific physical objects received shall prevail.

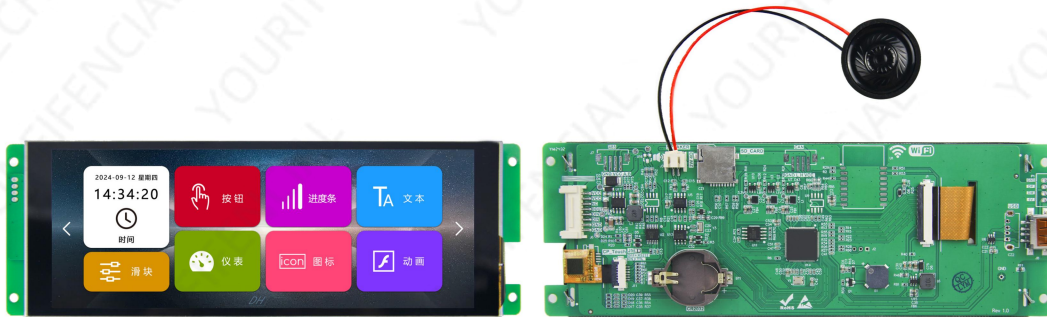


Figure 1-1 6.8 inch capacitive touch reference diagram

1.2 Hardware configuration

The following is a reference diagram of the hardware configuration of a product of this size, with a capacitive screen as an example, as shown in Figure 1-2.

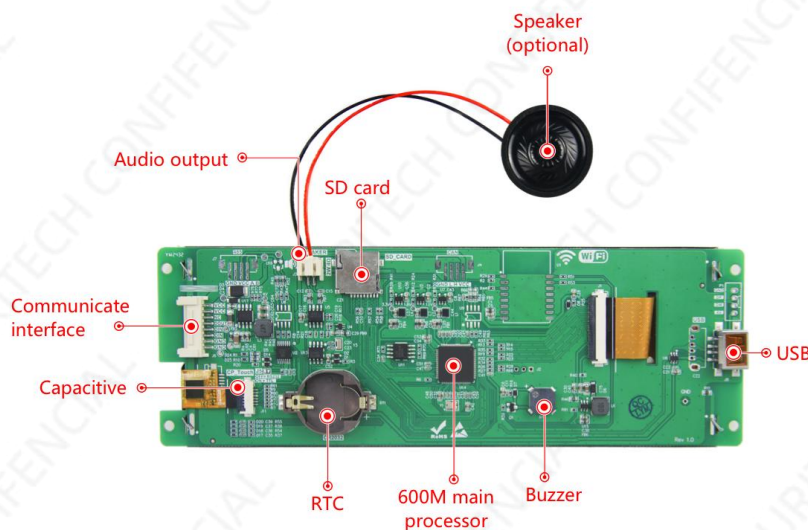


Figure 1-2 Hardware configuration



1.3 Pin Definition

Number	Definition	Description	Reference Diagram
1	VCC	Power input 5-28V	
2	VCC	Power input 5-28V	
3	NC	Empty feet	
4	DOUT	Serial port screen output, connected to the user's RXD terminal	
5	DIN	Serial port screen input, connected to the user's TXD terminal	
6	DIN	Serial port screen input, connected to the user's TXD terminal	
7	GND	Power Ground	
8	GND	Power Ground	

1.4 Debugging tool

The following is a reference diagram of the debugging tool of this product, with a capacitive screen as an example, as shown in Figure 1-3.

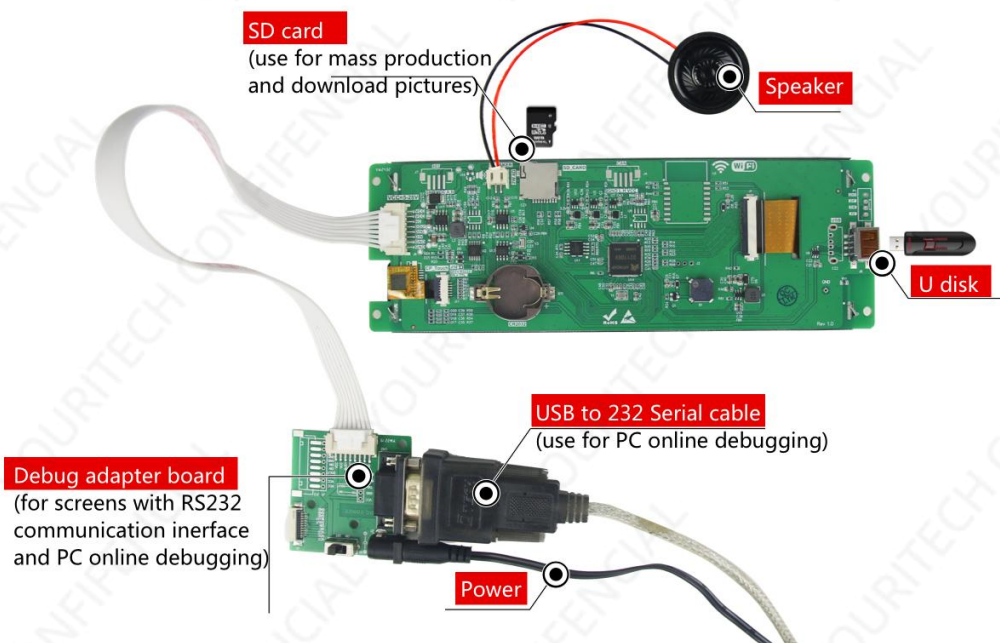


Figure 1-3 RS232 debugging tool Diagram



◆ RS232 Development and Debugging Accessories (Optional)	
Name	Accessory Model
Power supply	The power adapter is 5V/12V
Debugging the interposer	DC8P_HY2.0 debug board
Serial cable	Titr USB to RS232 serial cable
SD card	Capacity up to 32G, format: FAT32 (Kingston, SanDisk)



2. Product Structure

YOURITECH Technology launched the industrial serial port display terminal is a serial port display terminal integrating TFT display driver, picture font storage, GUI operation, audio playback and various configuration controls. The user microcontroller only needs to send and receive the corresponding serial port instructions to easily realize text, picture and curve display.

DH series serial screen processor adopts 64-bit 600M SOC processor, which integrates DDR video memory, JPEG/PNG picture hardware decoding, audio decoding, H.264 video decoding and other functions, and the system architecture is shown in Figure 2-1.

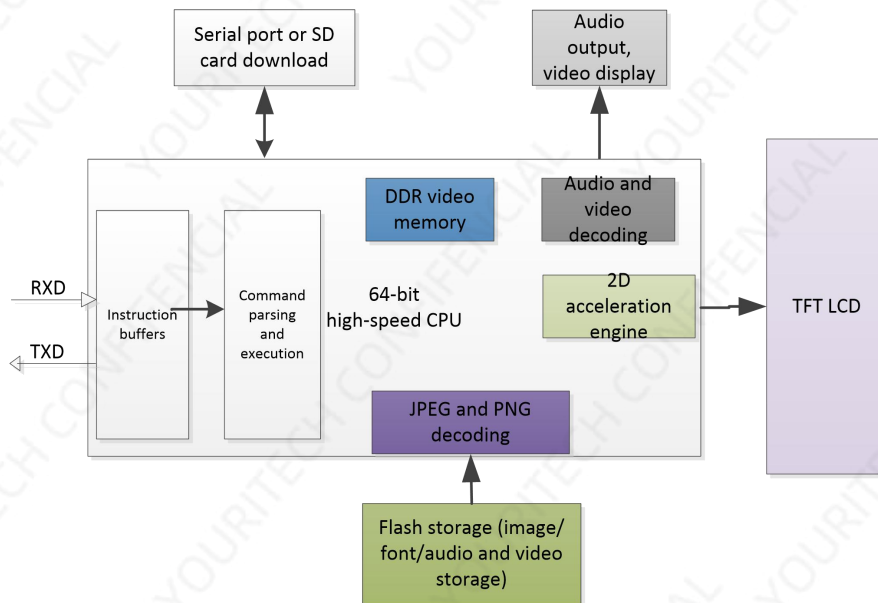


Figure 2-1 Internal structure diagram of DH series serial port screen

The main advantages of choosing a high-performance 64-bit dual-core processor architecture are:

1. Dedicated 64-bit 600M SOC processor optimized for image display, with 2D acceleration engine and JPEG/PNG image hardware decoding, so that the display can be matched with various special effects, and the display effect is smooth and gorgeous.
2. No operating system, continuous 24*365 hours of uninterrupted power can work reliably, no garbage redundant files.



3. Product Specification

◆ Product Specification	
Model Description	ET068DH1248-DC
Product Series	DH series
Core Processor	600M SOC processor
Operating System	No operating system, it can run when it is powered on, and the startup time is about 1 second
Protocol Type	The default color configuration instruction set, the host computer can be configured to run MODBUS RTU, XGUS protocol
Script language	Version 5.3 LUA scripts with user-written logic, protocols and algorithm functions running inside the screen
Size	6.8 inch
Resolution	1280*480
Installation Orientation	It supports 0°, 90°, 180°and 270°rotation mounted displays
Storage Space	128Mbit
Font	Built-in vector font, edge anti-aliasing, support any size ASCII, GBK, GB2312, UNICODE (global language) font library, can also customize any computer font display
Image Storage	It supports JPEG and PNG (transflective/fully transparent) compression, and supports image storage of any size. Approximately 87 full-screen images can be stored in aggregate (calculated by size of 169KB/image, BMP format is not recommended). Depending on the image compression ratio, this value will fluctuate up and down
Color	65K color, 16-bit RGB
Voltage	5-28V
Power Consumption	The backlight darkest, no horn: 0.8W
	The backlight darkest, with horn: 3.3W
	The backlight brightest, no horn: 3.1W
	The backlight brightest, with horn: 5.4W
Communicate Interface	RS232/TTL(The factory default level is 232, and the short-circuit J5 is TTL level)
Communicate Baud-rate	RS232/TTL :1200~921600bps, typical baud rate: 115200bps
Communication connector specifications	HY2.0-8P
Images are downloaded locally	SD card, serial port, U disk, WIFI
Firmware local/remote upgrade	Insert SD card/U disk to upgrade locally/support the user's motherboard remote serial port to upgrade the screen firmware
Picture remote upgrade	Support users to remotely use their motherboard serial port to upgrade screen-related



	picture projects, font libraries, configuration files, etc
Real-Time Clock (RTC)	Support clock, timer, countdown and other functions
Active Display Area (AA)	160.5mm*60.2mm
Product Dimensions (L*W*H)	198.8mm*67.8mm*16.7mm
Equipped with host computer software	VisualTFT®
Audio playback	MP3 audio format (speaker 4Ω2W, mono), which shares storage space with pictures. If the sample rate of mp3 format is 128kbps, the storage will be 0.92MB/min
Audio connector specifications	PH2.0-2P
Video playback	MP4 video format, which shares storage space with images. If a video file with a resolution of 800 x 600, a video bitrate of 3000 Kbps, an audio bitrate of 166 Kbps, and a frame rate of 25 Hz, the storage space occupies 21.9 MB/min
Wi-Fi (optional)	It adopts ESP-07S module, the core processor is ESP8266, supports the 2.4G-2.48GHz frequency band, supports network card mode and hotspot mode, can be configured as a wireless serial port transparent transmission protocol, and TCP/IP protocol can be used
CAN communication (optional)	CAN bus 2.0B protocol, support 125K, 250K, 500K, 1M baud rate, typical baud rate 1M
CAN communication connector specifications	PH2.0-4P vertical type

◆ Reliability Parameters

Operating temperature	-20~+70°C
Storage temperature	-30~+80°C
ESD Test	Test standard: IEC 61000-4-2 Contact: ±5KV; Air: +14/-15KV
EFT test	Test standard: IEC 61000-4-4 GB standard 4 (voltage: ±4KV; FREQUENCY: 100/5KHZ; TIME: 120S), no restart, no abnormal display, no abnormal touch, etc., the test function is normal
Radiation test	Test Standards: EN55022 ClassB Test environment: Three-meter dark wave chamber

◆ Product Core Competitiveness

Learning Cycle	30 minutes to familiarize yourself with the development environment, 3 days to complete the HMI design
Program debugging	The host computer integrates a "virtual serial port screen", which does not need to be connected to the hardware, and Keil IDE is directly bound to it for debugging
Startup time	It can be displayed when powered on
Configure Controls	In addition to traditional buttons, text, progress bars, QR codes and other controls, a variety of new configuration controls have been added, such as: multi-status



	indicators, recipes, operation records, flow blocks, alarm bars and other configuration controls
System Keyboard	Built-in virtual number, character keyboard, support Chinese and English input methods, customize keyboard
Data logging	Supports exporting data logging control content to SD card
Layer technology	The system has multiple built-in display layers for faster switching
Multi-language capabilities	Factory preset up to 15 global languages of any country, one-click switch of the required language, without the need for multiple sets of UI
Logical operation processing	The LUA script parser is embedded in the host computer, and users can customize various complex logical relationships and protocols on the screen, meeting 99.9% of the product function requirements of customers
Reliability	Products are tested for high and low temperature, ESD, group pulse and radiation by industry standards

◆ LCD

Display Type	IPS LCD
Backlight Tube	LED
Brightness (cd/m ²)	600
Backlight Life (h)	>20,000
Contrast Ratio	1500:1
Visual Angle (L/R/T/B)	85/85/85/85

◆ Touch Panel


Touch type	Capacitive touch screen (IC:GT911)
Capacitive screen touch mode	Single-point, swipe touch
Capacitive screen light transmittance	More than 90%
The number of capacitive screen touches	The number of capacitive screen touches is theoretically unlimited, and the touch life is related to the working environment (dust, humidity).
Capacitor cover is customized	The "glass cover + capacitive touch" integrated lamination service can be customized according to the user's drawing size

◆ Customization Service

Customization Fee	One-time order 1000PCS can partial exempt customized fee
Hardware Circuit	Can customize PCB size, circuit thickness, add user circuit, military-grade temperature display, etc.
Software Customization	Customize special instructions or controls according to user needs to reduce user development difficulty
UI design Service	Can provide picture art and product structure design services
Others	Customized on demand to meet all user needs



4. Product Dimensions

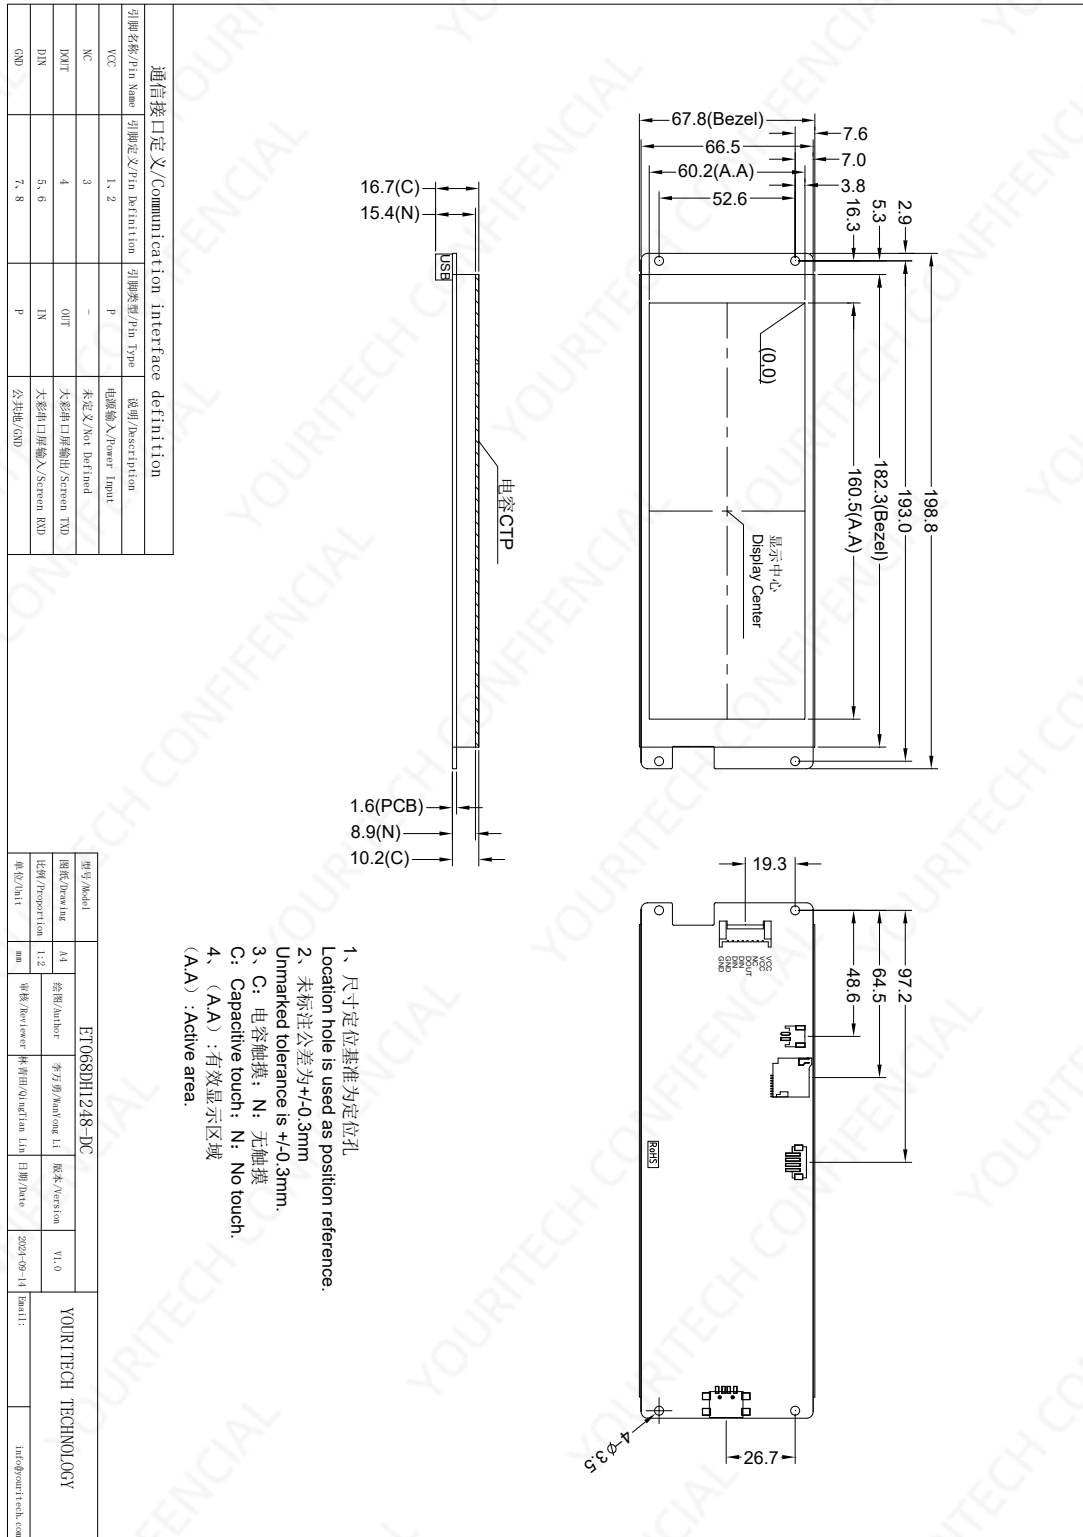

5. Reliability Test

All serial port screens of YOURITECH Technology have carried out a series of process reliability tests before mass production: high and low temperature, ESD, pulse burst, radiation, touch life and other tests to ensure product quality, as shown in Figure 5-1.



Figure 5-1 Reliability test equipment

5.1 ESD Test

5.1.1 Executive Standard

Executive Standard

IEC 61000-4-2

5.1.2 Test Ambient

Test ambient temperature: 25°C

Test ambient humidity: 50%

Test process: Place the product on the test stand, lay down on the serial port screen buckle and the display area in order to make contact and air discharge as shown in Figure 5-2. Observe whether if the screen have reset or restarted, or abnormal display.



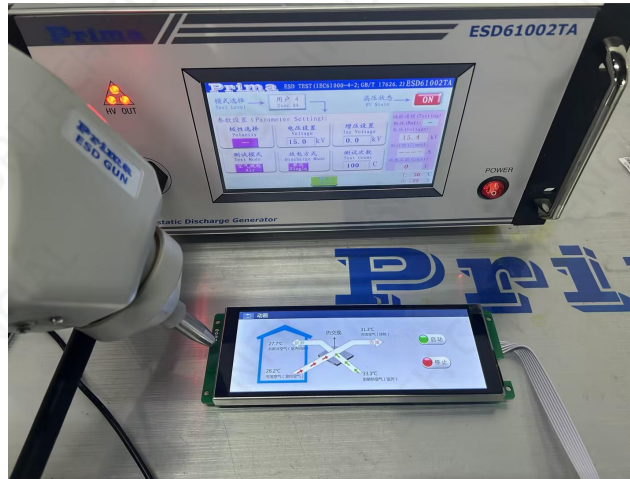


Figure 5-2 ESD Test

5.1.3 Test Data

Product Model	Discharge type	Humidity	Test result
ET068DH1248-DC	Contact	±5KV	No restart, no abnormal display, normal function
	Contact	±6KV	Occasional reset and restart, no abnormal display, normal function
	Air	+14/-15KV	No restart, no abnormal display, normal function
	Air	+15KV	Occasional reset and restart, no abnormal display, normal function

Note: The current test tests are all product bare tests, and the ESD performance index of the whole machine will be higher if the screen and machine are well grounded on the actual product assembly machine, or the surface of the touchpad is protected by PVC or cover

5.2 High and Low Temperature Aging Test

5.2.1 Test environment

Test ambient temperature: -20~+70°C

Test environment humidity: 65%±3%RH

Test process: the product is placed obliquely in the high and low temperature test chamber, as shown in Figure 5-3; Through the 72H high temperature, low temperature, high and low temperature alternating transformation aging test, observe whether the screen resets and restarts, abnormal display, abnormal function and other phenomena during the test and after the experimental test.





Figure 5-3 High and low temperature aging test

5.2.2 Test data

Product Model	Temperature	Humidity	Test results
ET068DH1248-DC	High temperature (70°C)	65%	无重启、无异常显示、功能正常
	Low temperature (-20°C)	65%	无重启、无异常显示、功能正常
	Alternating high and low temperature (-20~70°C)	65%	无重启、无异常显示、功能正常

5.3 Group Pulse Test

5.3.1 Executive Standard

Executive Standard	IEC 61000-4-4
--------------------	---------------

5.3.2 Test environment

Test ambient temperature: 25°C

Test ambient humidity: 50%

Test process: the product is placed flat on the test bench, and the power supply after coupling the pulse group generator is used to power the screen, as shown in Figure 5-4, and observe whether the screen is reset and restarted, display abnormal, touch abnormality and other phenomena during the experiment.





Figure 5-4 group pulse test diagram

5.3.3 Test Data

Product Model	Test Standard			Test Result
ET068DH1248-DC	International Standard 4			No restart, normal
	Voltage (KV)	Frequency (KHZ)	Time (S)	communication, normal
	±4.0	5	120	function



5.4 Radiation Test

5.4.1 Executive Standard

Executive Standard

EN55022 ClassB

5.4.2 Test environment

The radiation test laboratory environment is shown in Figure 5-5.

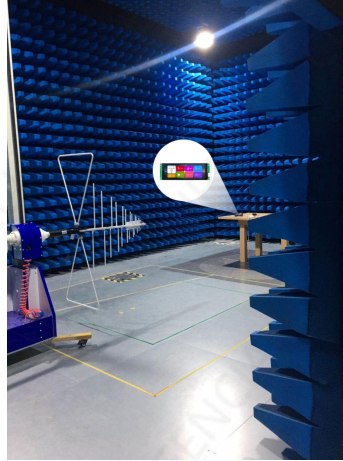


Figure 5-5 Radiation test chart

5.4.3 Test Data

1. Radiation test horizontal test data, shown in Figure 5-6.

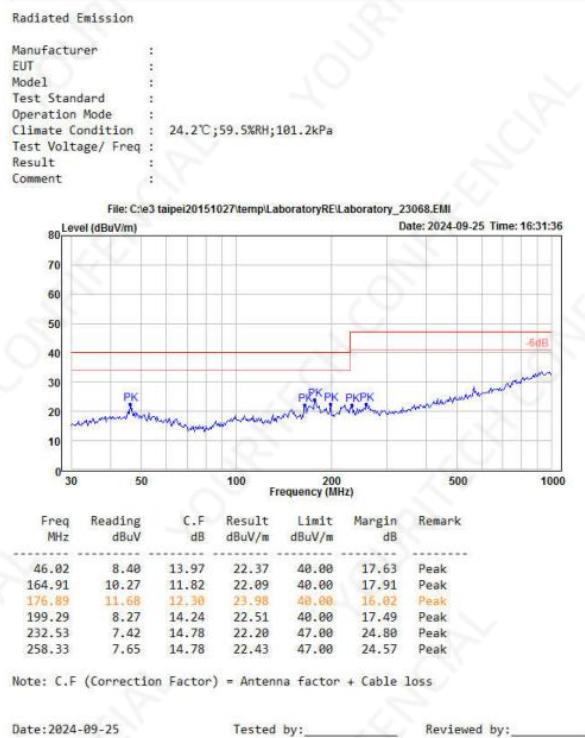


Figure 5-6: Horizontal direction of radiation measurement



2. Radiation test data in the vertical direction, as shown in Figure 5-7.

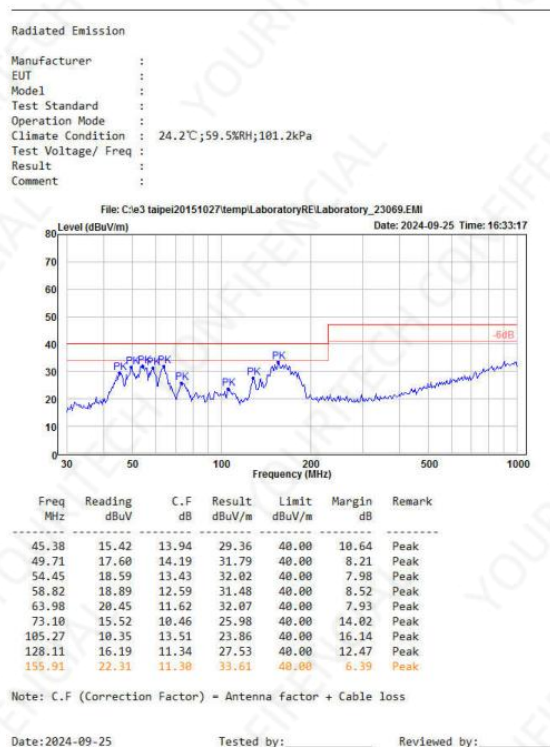


Figure 5-7: Radiation test in the vertical direction



6. Protocol Configuration

VisualTFT is a serial port screen development and debugging software independently developed by YOURITECH, integrating the first domestic exclusive "virtual serial screen" simulation simulator, which is free to use for life. After the user creates a new project, imports the designed art pictures, and then configures the buttons and other controls in each screen, and finally downloads the entire project to the serial port screen after the simulation is correct. The software interface is shown in Figure 6 -1.

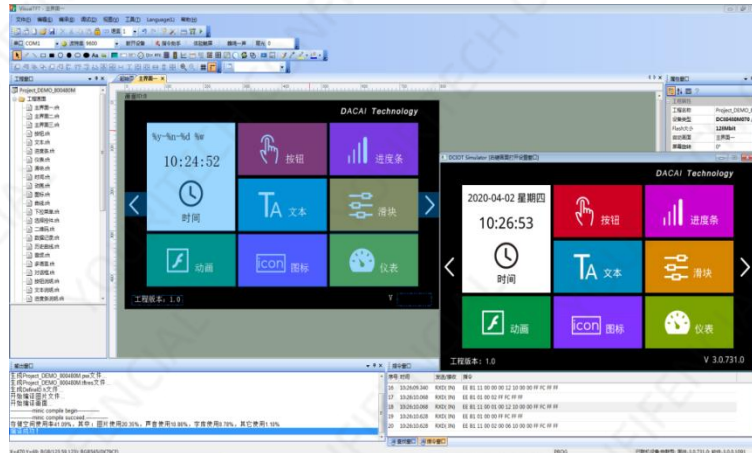


Figure 6-1 VisualTFT main interface

Any lottery user only needs 3 steps to complete a complex human-computer interaction design in 30 minutes.

1. Prepare artwork.

Arrange for artists to design the required images of the product, such as the boot screen, text background, button icons, and prompt boxes.

2. Use the supporting VisualTFT software for screen editing, script writing, control configuration and picture download.

First of all, the supporting host computer VisualTFT software is used to layout the interface and configure the controls of the pre-designed art pictures, and then run the "virtual serial port screen" for simulation, and finally the entire project can be downloaded to the internal memory of the serial port screen through SD/UART (depending on the hardware configuration of different models). The PC software assigns a unique ID number to each screen, picture, and control in the project. Users can also write the required logic control and algorithms through the script editor embedded in the host computer to reduce the communication frequency between the screen and the motherboard.

3. The user single-chip microcomputer listens and sends the corresponding serial port command control screen display.

After the project is downloaded to the screen, once a button is pressed on the screen, the user's MCU serial port will receive the button ID information or coordinate value uploaded on the screen. By parsing the ID number, the user can obtain the screen position and function attributes of the current button, so that he can control the action of the relevant peripheral device or the screen update display.

For touchless products, the user microcontroller does not need to listen to the information



uploaded by the button ID, but only needs to send relevant instructions for screen switching and text and picture display.

6.1 What is a virtual serial screen

"Virtual Serial Screen"

is the first exclusive serial screen emulator developed by YOURITECH Technology in China.

After the user installs the VisualTFT software of the host computer, it can be run and used.

The simulation results of the

virtual serial screen are exactly the same as those of the real serial screen. Therefore, there is no need to purchase hardware during the early evaluation of R&D, and it can communicate with each other through its own single-chip microcomputer serial port, and the button control information will be uploaded immediately when the mouse clicks the button, as shown in Figure 6-2. Once the developer has d



Figure 6-2 The serial port of the user's single-chip microcomputer is debugged online with the "virtual serial port screen"

6.2 Keil is bound and debugged with the virtual serial port screen

In order to further improve the development efficiency, users can also bind Debug and debug the "virtual serial port screen" through the Keil development environment. When the program is single-step debugged, all the running results can be displayed on the "virtual serial port screen", which greatly saves the development time of engineers, as shown in Figure 6-3. Once the project interface is changed, users no longer need to re-download the images to the serial screen, and all pre-project evaluations can be completed based on the PC side.

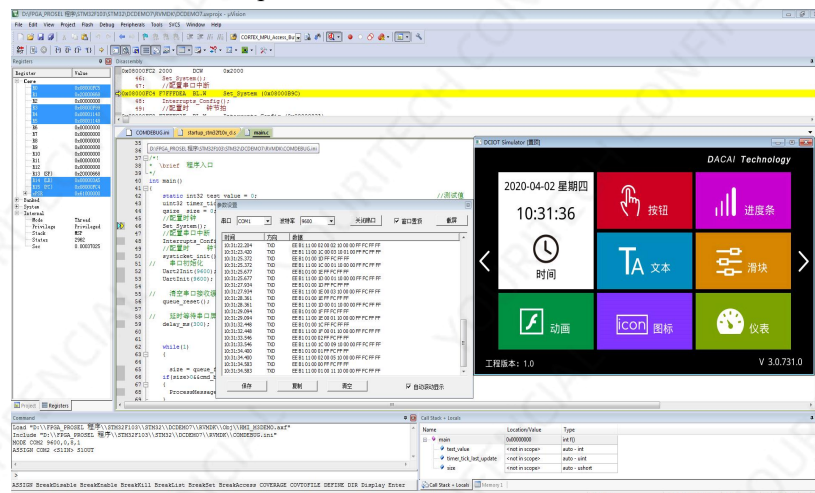


Figure 6-3 Debugging the Keil development environment and the virtual serial port screen



Note: The debugging of "virtual serial port screen" needs keil software support, in the debug process, enter dirvtreg in the command serial port, you need to list SxIN (according to the different microcontrollers, x may represent 0,1,2), if there is a list, it means that keil has virtualized the serial port of the single-chip microcomputer to the register, so that it can be used.



7. Protocol Configuration

Most of the serial port screens launched by YOURITECH Technology are default to YOURITECH configuration instruction set, and users can run MODBUS RTU, XGUS and other protocols through the host computer configuration.

Open the VisualTFT host computer software, click [Tools] → [Protocol and Variable Settings] in the menu bar, as shown in Figure 7-1, to enter the protocol configuration interface, and users can choose to enable the corresponding protocol according to their own needs, as shown in Figure 7-2.

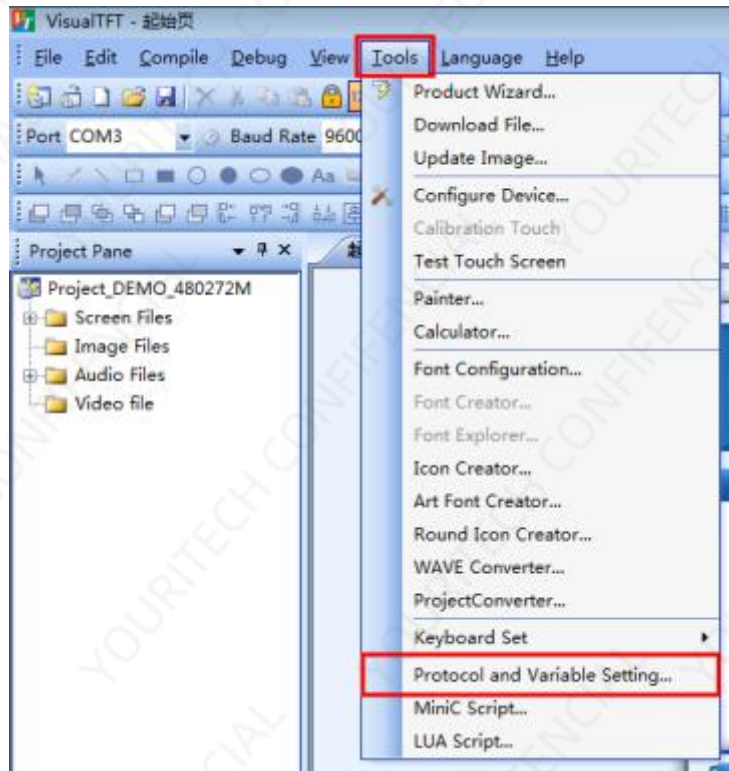


Figure 7-1 LUA script programming



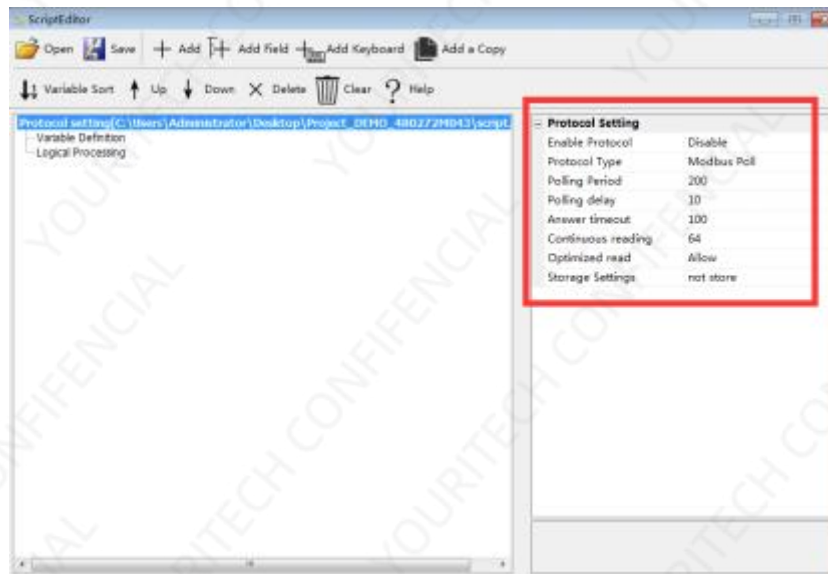


Figure 7-2 Protocol configuration interface



8. LUA Script Configuration

YOURITECH Technology launched F-type,M-type, IoT, DX series serial port screens all support LUA language scripts. The serial port screen provides a wealth of LUA script APIs and callback interfaces, users can directly set and obtain the running status of all configuration controls by calling the API interface, combined with the written logic processing, the screen can complete the predetermined action without the participation of the external MCU, reducing the data communication between the MCU and the screen.

LUA is a lightweight scripting language with simpler syntax logic than C, and developers can get started directly. The LUA language comes with a well-functioning mathematical function library, string processing, JSON and other libraries, and has function support for common mathematical operations, such as square, sine cosine, and absolute value; Due to the high main frequency of the screen itself, all complex algorithms are processed by the screen, which greatly reduces the execution overhead of the user's MCU.

To write the LUA script of the project in the VisualTFT software, you can click [Tools] → [LUA Script Programming] in the menu bar to open it, as shown in Figure 8 -1, and enter the LUA scripting interface, as shown in Figure 8-2.

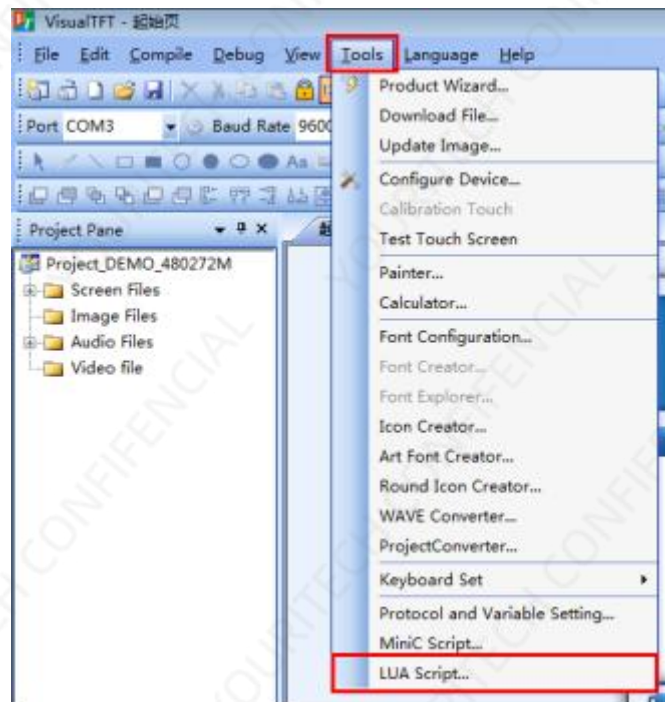


Figure 8-1 LUA script programming



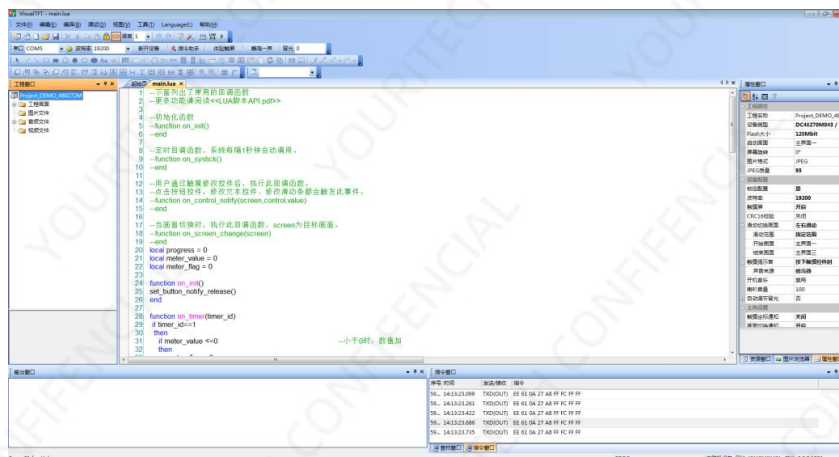


Figure 8 -2 Lua scripting interface



9. Packaging and Physical Dimensions

Unit weight					
Net weight (KG)	0.19				
Packaging standard and total weight					
Box model	Box size (length * width * height, unit mm)	Number of layers	Quantity (PCS)/layer	Total quantity (pieces)	Total weight(KG)
Box 1	616*523*275	1	50	50	12.5

Note: The total weight does not include the weight of the accessory; The above weight information is an estimated weight for reference only, and the actual weight is subject to the actual weight.



10. Disclaimer

This document provides information about the products of YOURITECH Technology . (hereinafter referred to as YOURITECH Technology), aiming to assist customers to accelerate the research and development progress of products, and any routine procedures, technical documents, CAD drawings and other materials and information provided in the service process or other channels are for reference only, and customers have the right not to use or modify by themselves. The company does not provide any guarantee of completeness, reliability, etc., and the company does not assume any responsibility for special, incidental or indirect losses caused by any reason during the customer's use. YOURITECH technology products cannot be used as the only control equipment in military, medical, lifesaving or life support purposes.

This document does not grant any license to any intellectual property rights, and no license to any intellectual property rights, express or implied, or by prohibition of speaking or otherwise. Except for the responsibilities stated in the terms and conditions of sale of its products, YOURITECH Technology does not assume any other responsibilities. Moreover, YOURITECH Technology does not make any express or implied guarantee for the sale and/or use of YOURITECH Technology products, including the fitness for a particular purpose of the product, merchant-ability or infringement liability for any patent, copyright or other intellectual property rights. YOURITECH Technology may make changes to product specifications and product descriptions at any time without prior notice.

