

INDUSTRIAL STRENGTH... Start Your Application From **YOURITECH**

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Production Custom designs Installation

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Optical Bonding

Cover glass

System solutions

OEM Solutions

Custom Display

Mechanical design



**Product
Datasheet**

Medical Grade ET104M8060-DCdatasheetV1.2

ISO9001:2015 Quality certification

Customer			
keyword	Mseries,medical grade,10.4inch,800*600,with configuration, LUAscript,audio,AV input.video		
Model	ET104M8060-DC		
Signature of Customer		Signature of Engineer	
Date		Date	



Version Record

Version	Date	Reason for modify	Page	Written by	Reviewed by
V1.0	2020/04/20	File creation	all		
V1.1	2020/06/29	1. Added AV interface definition in CAD 2. Added in product parameters: AV interface specifications, which AV cameras are supported 3.Added sleep power consumption data	3,11		
V1.2	2020/11/23	Added video function	P4		



Content

1. Introduction of Hardware.....	4
1.1 Product Appearance	4
1.2 Hardware Configuration.....	4
1.3 Debugging Tools	5
2. Product Specification	6
3. Reliability Test	9
3.1 ESD Test.....	9
3.1.1 Executive Standard.....	9
3.1.2 Test Ambient	9
3.1.3 Test Data.....	10
3.2 High and low temperature aging test.....	10
3.2.1 Test Ambient	10
3.2.2 Test Data.....	11
3.3 Group Pulse Test	11
3.3.1 Executive Standard.....	11
3.3.2 Test Ambient	11
3.3.3 Test Data.....	12
3.4 Radiation Test.....	12
3.4.1 Executive Standard.....	12
3.4.2 Test ambient	12
3.4.3 Test Data.....	13
4. Product demension.....	15
5. Switch RS232 & TTL electrical level	16
6. Protocol Configuration.....	17
7. LUA Script Configuration.....	19
8. Package and Size.....	21
9. Product Structure	22
10. Development Software.....	23
10.1 What is visual serial interface screen	24
10.2 The binding debugging of Keli and Virtual serial port screen.....	25
11. Disclaimer	26



1. Introduction of Hardware

This chapter mainly introduces some appearance reference diagrams, hardware configuration diagrams and debugging tools diagrams.

1.1 Product Appearance

Below are appearance reference diagrams of different model product in the same size, as Diagram 1-1, showed.

Note: If there is no structural process modification, hardware reliability change or layout change, the company will not notify the customer, the standard is based on the product you received.

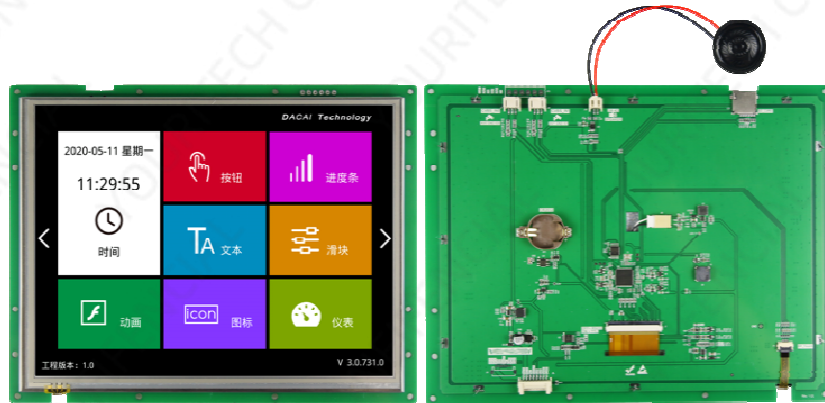


Diagram 1-110.4inch resistive touch reference diagram

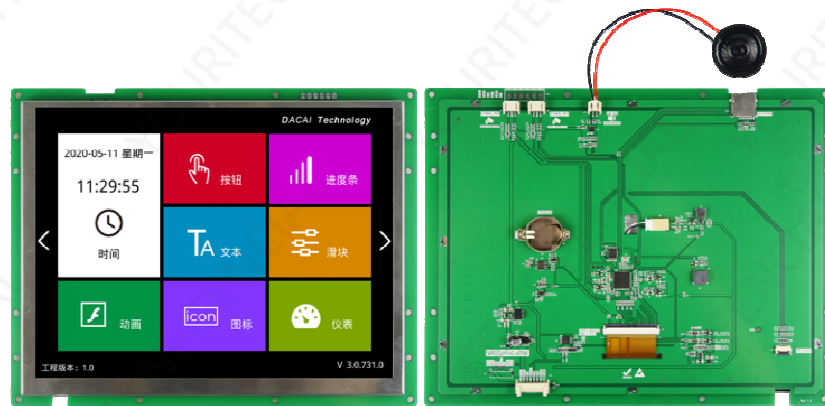


Diagram 1-210.4 inch non-touch reference diagram

1.2 Hardware Configuration

Below is the hardware configuration diagram of the 10.4inch resistive touch product, as Diagram 1-3 showed.



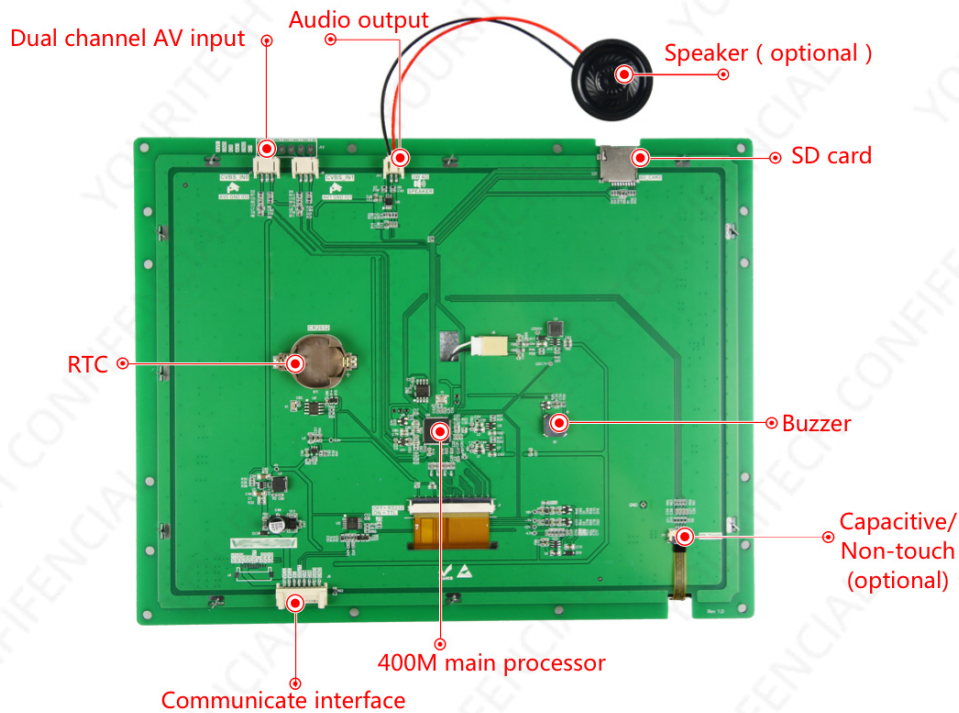


Diagram 1-3for hardware configuration

1.3 Debugging Tools

Below is the debugging tool diagram of the capacitiveproduct,asDiagram 1-4showed.

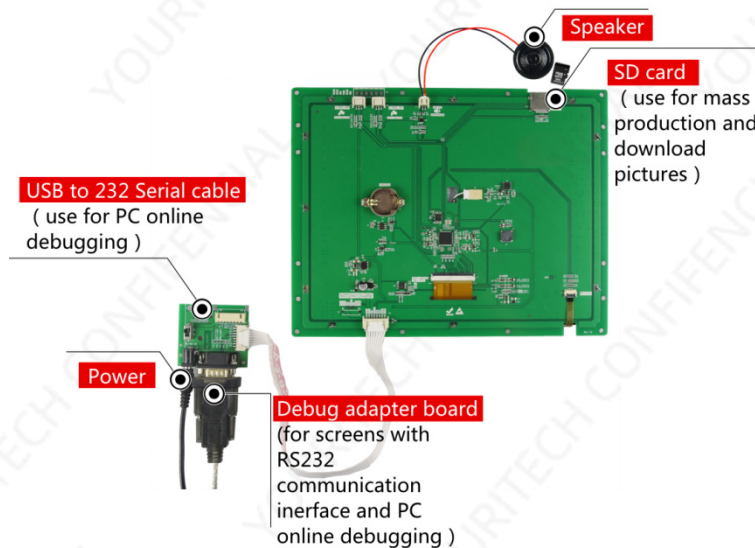


Diagram 1-4for debugging tools



2. Product Specification

◆ Product Specification	
Model Description	ET104M8060-DCT(RS232/TTL,Resistive touch ET104M8060-DCC(RS232/TTL, Capacitive -touch ET104M8060-DCN(RS232/TTL,non-touch)
Product Series	Mseries,Medical grade
Core Processor	400M SOCprocessor
Operating System	No operating system (OS),can run once power on
Protocol Type	Default YOURITECH configuration instruction set, the host computer can be configured to run MODBUS RTU, XGUS protocol
Script language	LUAscript,The screen can run user-written logic, protocol and algorithm functions
Size	10.4 inch
Resolution	800*600
Installation Display	Support 0°/90°/180°/270°rotate display
Memory space	128Mbit
Font Library	Built-in vector font,edge anti-aliasing,including ASCII,GBK,GB2312 and UNICODE(Global language)libraries.Customized computer font display
Image Storage	Support JPEG,PNG (semi-transparent / full transparent) image,support for any size image storage. Accumulate to store about 145 full-screen images (calculated by size 100KB/frame,BMP format is not recommended).The image compression ratio is different,this value will float up and down.
Color	65Kcolor, 16-bit RGB
Voltage	4.5-30V
Power Consumption	Sleep:0.5W
	Darkest backlight non-speaker:1.1W
	Darkest backlight with speaker:2.2W
	Brightest backlight non-speaker:4.2W
	Brightest backlight with speaker:5.7W
Communicate Interface	RS232/TTL(Factory default 232 level, short circuit J5 is TTL level)
Communicate Baudrate	1200~921600bps,typical baud rate:115200bps
Interface Specification	Default HY2.0-8P,FPC1.0-10P is optional.
Image Local Download	SDcard,serialport,U disk(need to customazation)
Firmware local/remote upgrade	Insert SD card to upgrade locally / support user motherboard remote serial port to upgrade screen firmware
Image remote upgrade	Support users to remotely use their motherboard serial port to upgrade screen related picture projects, fonts, configuration files, etc.
Real-time clock(RTC)	Support clock, timer, countdown etc. functions



Active Area of Displaying(AA)	L*W =212.7mm*159.3mm
Product Dimension (L*W*H)	247.7mm*193.8mm*17.2mm (MAX,include TP)
Development Software	VisualTFT®
Operating temperature	-20~+70℃
Storage Temperature	-30~+80℃
AVinput	supports P or N system CVBS camera signal input with a resolution below 720*576, can be displayed in any window size, and can be displayed with superimposed controls
AVinput connector specification	PH2.0-3P
Audio play	MP3 audio format (speaker 4 Ω 2W, mono), shared storage space with pictures. If the sampling rate in mp3 format is 128kbps, it takes up 0.92MB/min of storage
Audio Connector Specification	PH2.0-2P
Video play	MP4 video format, sharing storage space with pictures. If a video file with a resolution of 800*600, a video bit rate of 3000Kbps, an audio bit rate of 166Kbps, and a frame rate of 25Hz, takes up 21.9MB/minute of storage
WIFI	Not support
Three Anti-paint Process	None(It is optional)

◆ Core Competitiveness	
Learning Circle	Familiar with the development environment in 30 minutes and complete the HMI design in 3 days
Program Debugging	The development software contains Simulator. Engineers do not need to buy equipment and it can debug with Keil IDE directly.
Start-up Time	Operation upon power-on, no system loading time
Configuration Control	Various configuration controls are available, including button, text, pull-down menu, progressbar, slidingblock, instrument, animation, QR code, curve, data record and circular progress bar, Sprite slide controletc.function.
System keyboard	Built-in virtual numeric and character keyboard, support Chinese and English input method, customizable keyboard
Data record	Support data record controls content export to SD card
Layer Technique	The system has multiple built-in display layers to provide a higher switching speed
Multiple Languages	More than 10 languages of any country in the world can be preset, one-click to switch the required language, no need for multiple sets of UI
Logical Operation processing	The host computer has a built-in LUA script compiler, and users can customize various complex logical relationships and protocols on the screen to meet 99.9% of product function requirements of customers.
Remote Upgrade	Support remote serial port upgrade screen firmware, project files, designated pictures, configuration files and fonts, etc.
Life Cycle	Adopt traditional brand processors without supply shortage for years



◆ LCD	
Display Type	TFT LCD
Backlight Tube	LED
Brightness (cd/m ²)	400
Backlight Life (h)	>20,000
Contrast Ratio	400:1
Viewing(L/R/T/B)	70/70/50/60

◆ Touch Panel (Resistive /Capacitive is Optional)	
Touch type	Resistive touch screen
Touch mode	Single-point and sliding touch
Resistive screenlight transmittance	Over 80%
Resistive screen touch time	The same pixel, more than 1 million times a single click

◆ Customization Service	
Customization Fee	One-time order 1000PCS can partial exempt customized fee
Hardware Circuit	Can customize PCB size, circuit thickness, add user circuit, military-grade temperature display, etc.
Software Customization	Customize special instructions or controls according to user needs to reduce user development difficulty
UI design Service	Can provide picture art and product structure design services
Others	Customized on demand to meet all user needs



3. Reliability Test

A series of process reliability tests have been conducted before the mass production of all serial port screens of YOURITECH, including high-low temperature, ESD, group pulse, radiation, touch life and so on, so as to ensure the product quality, as Diagram 3-1 showed.



Diagram 3-1 Reliability test device

3.1 ESD Test

3.1.1 Executive Standard

Executive Standard

IEC 61000-4-2

3.1.2 Test Ambient

Test ambient temperature: 25°C

Test ambient humidity: 50%

Test process: Place the product on the test stand, lay down on the serial port screen buckle and the display area in order to make contact and air discharge as shown in Diagram 3-2. Observe whether if the screen have reset or restarted, or abnormal display.





Diagram 3-2ESDTest

3.1.3 Test Data

Product Model	Discharge Type	Discharge value	Test result
ET104M8060-DCT ET104M8060-DCC	Contact	$\pm 7KV$	No restart, no abnormal display, normal function
	Contact	$\pm 12KV$	Occasional reset and restart, no abnormal display, normal function
	Air	$\pm 12KV$	No restart, no abnormal display, normal function
	Air	$\pm 14KV$	Occasional reset and restart, no abnormal display, normal function
ET104M8060-DCN	Contact	$\pm 6KV$	No restart, no abnormal display, normal function
	Contact	$\pm 8KV$	Occasional reset and restart, no abnormal display, normal function
	Air	$\pm 8KV$	No restart, no abnormal display, normal function
	Air	$\pm 13KV$	Occasional reset and restart, no abnormal display, normal function
Note: The current test tests are all product bareness tests. On the actual product assembly machine, keep the screen and the machine well grounded, or the surface of the touch panel is protected by PVC or cover plate, the ESD performance index of the whole machine will be higher.			

3.2 High and low temperature aging test

3.2.1 Test Ambient

Test ambient temperature: $-20 \sim +70^{\circ}C$

Test ambient humidity: $60\% \pm 3\%RH$

Test process: Place the product in the high and low temperature test box at an angle as shown in Diagram 3-3. Pass the 72H high temperature, low temperature and high and low temperature alternating change aging test. Observe whether the screen resets and restarts during the test and



after the test. Abnormalities, abnormal functions, etc.



Diagram 3-3 High and low temperature aging test

3.2.2 Test Data

Product Model	Temperature	Humidity	Test Result
ET104M8060-DCT ET104M8060-DCC ET104M8060-DCN	High temperature(70°C)	60%	No restart, no abnormal display, normal function
	Low temperature(-20°C)	60%	No restart, no abnormal display, normal function
	High and low temperature alternating(-20~70°C)	60%	No restart, no abnormal display, normal function

3.3 Group Pulse Test

3.3.1 Executive Standard

Executive Standard	IEC 61000-4-4
--------------------	---------------

3.3.2 Test Ambient

Test ambient temperature:25°C

Test ambient humidity:50%

Test process: Place the product on the test stand, and power the screen through the power supply



after the pulse group generator is coupled to the pulse group, as shown inDiagram 3-4. During the test, observe whether the screen resets, displays abnormally, or touches, abnormalities and other phenomena.



Diagram 3-4Group pulse test

3.3.3 Test Data

Product Model	Test Standard			Test Result
ET104M8060-DCT	International Standard 4			No restart, normal communication, normal function
ET104M8060-DCC				
ET104M8060-DCN				
	Voltage(KV)	Frequency(KHZ)	Time(S)	
	4.0	100	120	

3.4 Radiation Test

3.4.1 Executive Standard

Executive Standard	EN55022 ClassB
--------------------	----------------

3.4.2 Test ambient

The radiation test laboratory environment is shown inDiagram 3-5.



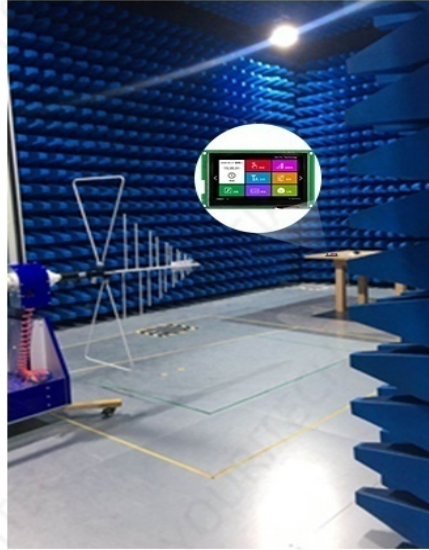


Diagram 3-5 Radiation test

3.4.3 Test Data

1. Radiation test horizontal test data, as shown in Diagram 3-6.

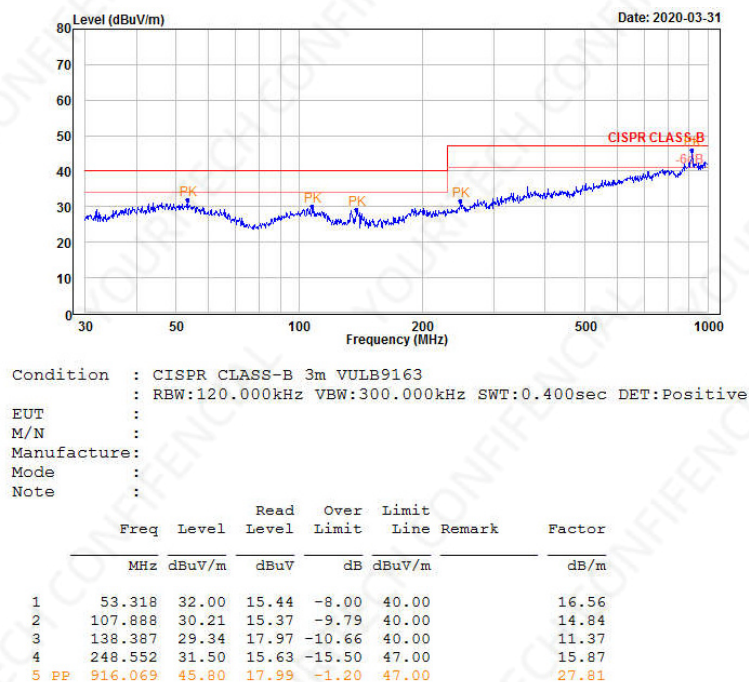


Diagram 3-6 Horizontal direction of radiation test

2. Radiation test vertical test data, as shown in Diagram 3-7.






Diagram 3-7 Vertical direction of radiation test




The technical drawing illustrates the ETT10A8060-DC module. The top view shows a rectangular board with dimensions 207.7mm (length) and 208.8mm (width). Key features include a central display area labeled '显示中心 Display Center', a speaker labeled 'SPEAKER', an AV input labeled 'AV Input', and an SD card slot labeled 'SD_CARD'. Dimensions for these components are provided, such as 193.8mm for the display width and 177.8mm (6.99in) for the display height. The side view shows the module's profile with a height of 13.2mm (0.52in) and a width of 11.6mm (0.46in). The module is labeled 'MAX-18.5(T)' and 'MAX-13.2(N)'.



5. Switch RS232 & TTL electrical level

Almost all the products are support RS232 and TTL level exchange. As Diagram 6-1 showed, when the J5 is disconnected, the UART interface is RS232. When the J5 is connected, the UART interface is TTL electrical level.

Note: TTL electrical level support 3.3V CMOS and 5V TTL

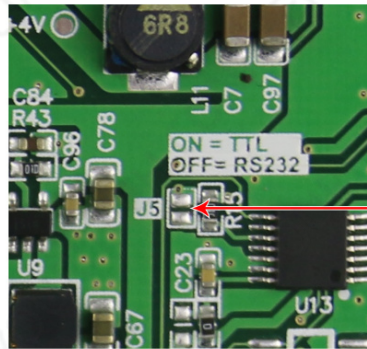

断开:232电平
OFF:232 Level
短接:TTL电平
ON:TTL level

Diagram 6-1 Switch RS232&TTL



6. Protocol Configuration

Most of the serial screens launched by YOURITECH Technology default to the YOURITECH configuration instruction set. Users can configure and run MODBUS RTU, XGUS and other protocols through the host computer.

Open the VisualTFT host computer software, click the menu bar [Tool] → [Protocol and Variable Settings], as shown in Diagram 6-1, enter the protocol configuration interface, users can choose to enable the corresponding protocol according to their own needs, as shown in Diagram 6-2.

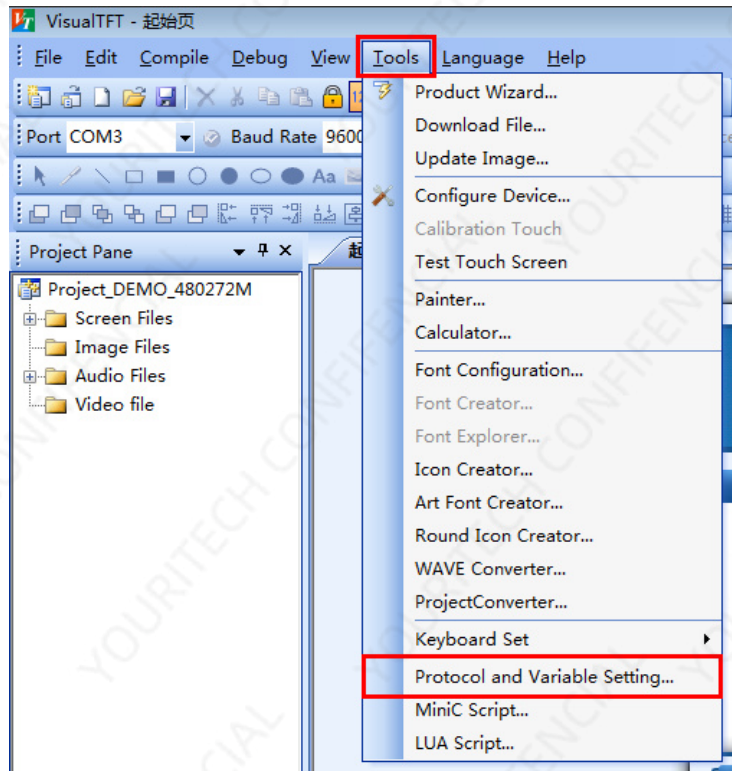


Diagram 6-1 Protocol and variable settings



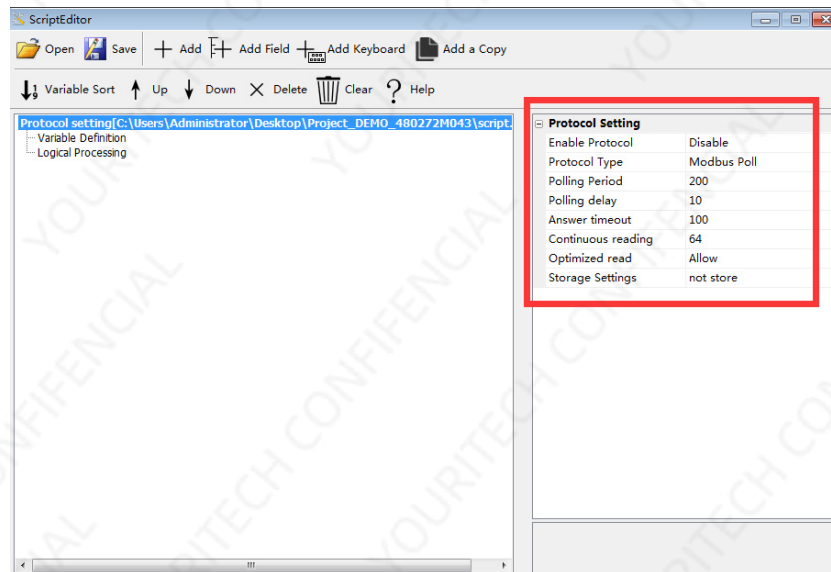


Diagram 6-2 Protocol configuration



7. LUA Script Configuration

The serial screens of F series, M series and W series launched by YOURITECH Technology all support LUA language scripts. The serial port screen provides numerous LUA scripting API and callback interface. The user can directly set and obtain the running status of all configuration controls by calling the API interface. Combined with the logic processing, the screen can complete predetermined actions without external MCU participation, which is reduce data communication between MCU and screen.

LUA is a lightweight scripting language, the grammar logic is simpler than C language developers can directly get started. The LUA language comes with a well-functioning mathematical function library, string processing, JSON and other libraries. It has function support for common mathematical operations, such as square root, sine and cosine, and absolute values. Due to the high frequency of the screen itself, complex algorithms After all are handed over to the screen for processing, the execution overhead of the user MCU is greatly reduced.

LUA script of the program written by VisualTFT software, click [Tool] → [LUA Script Programming] in the menu bar to open it, as shown in Diagram 7-1, and enter the LUA script writing interface as shown in Diagram 7-2.

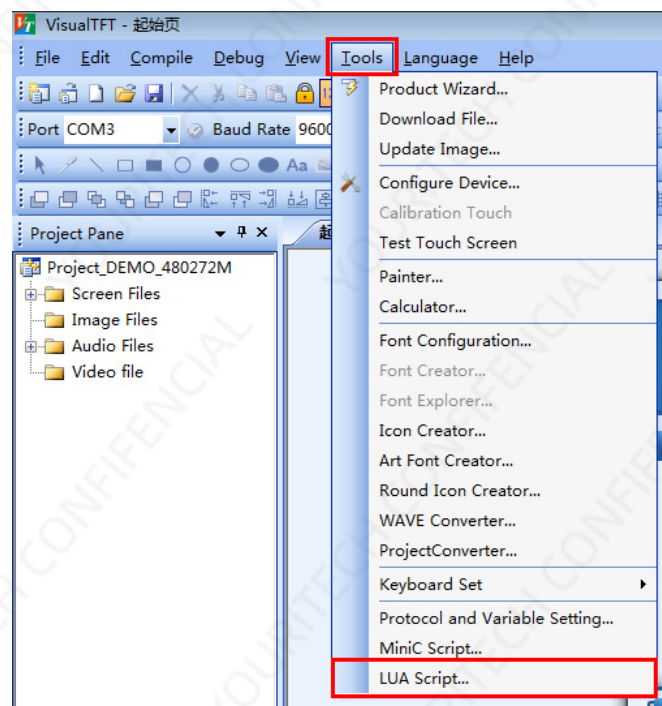


Diagram 7-1LUA Script programming



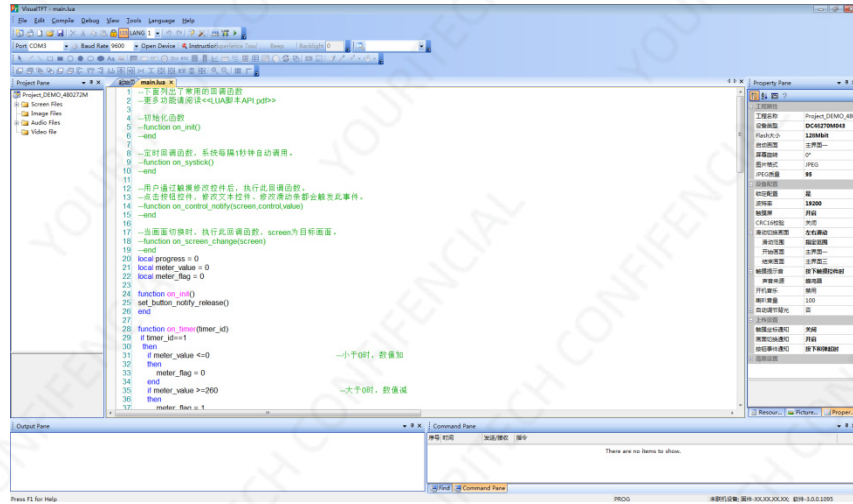


Diagram 7-2Lua script programming



8. Package and Size

Single Product Weight					
Net weight(KG)		0.76			
Package Standard and Total Weight					
Packing Box Model	Packing box size(L*W*H,unit,mm)	Layer	Quantity(PCS)/Layer	Total quantity(pcs)	Total weight(KG)
No.1 Packing box	357*257*90	1	10	10	9.13
No.2 Packing box	478*340*275	1	25	25	21.75

Note: The total weight does not include the weight of accessories; the above weight information is the estimated weight for reference only, the actual weight is subject to actual.



9. Product Structure

The industrial serial port screen launched by YOURITECH Technology Co., Ltd. is a serial display terminal that integrates TFT display driver, picture storage, GUI operation, audio playback and various configuration controls. The user MCU only needs to send and receive the corresponding serial port commands to easily display text, pictures

The M series serial port screen processor uses a 32-bit 400M SOC processor, which integrates functions such as SDR memory and JPEG image decoding. The system structure is shown in Diagram 10-1

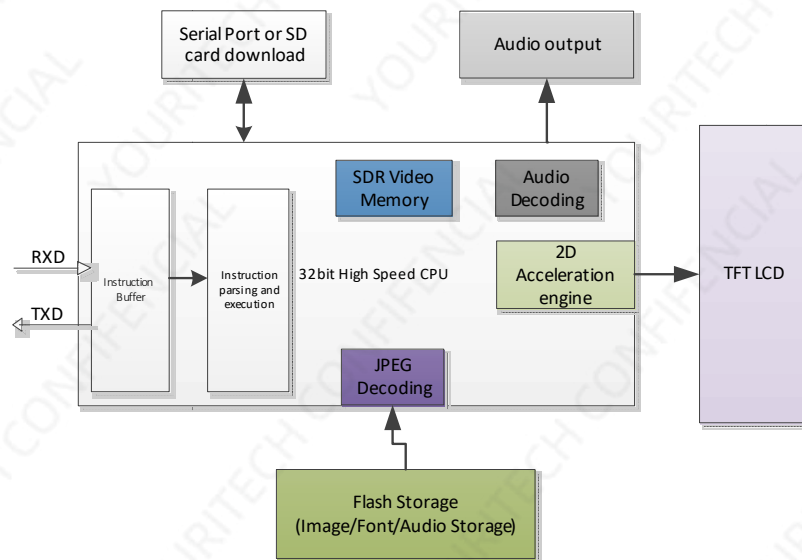


Diagram 10-1Mseries product internal structure diagram of serial serial screen

The main advantages of choosing a high-performance 32-bit dual-core processor structure are:

1. Dedicated 32-bit 400M SOC processor optimized for picture display, with 2D acceleration engine, JPEG picture hardware decoding, so that the display can cooperate with various special effects, and the display effect is smooth and gorgeous.
2. No operating system, 24 * 365h hours of continuous power can work reliably, no garbage redundant files.



10. Development Software

VisualTFT is a serial port screen development and debugging software independently developed by YOURITECH. It integrates the first exclusive "virtual serial port screen" simulation emulator in China, is free for life. After the user creates a new project, import the designed UI picture, and then configure the buttons and other controls in each screen. After the simulation is correct, finally download the entire project to the serial port screen. The software interface is shown in Diagram 10-1.

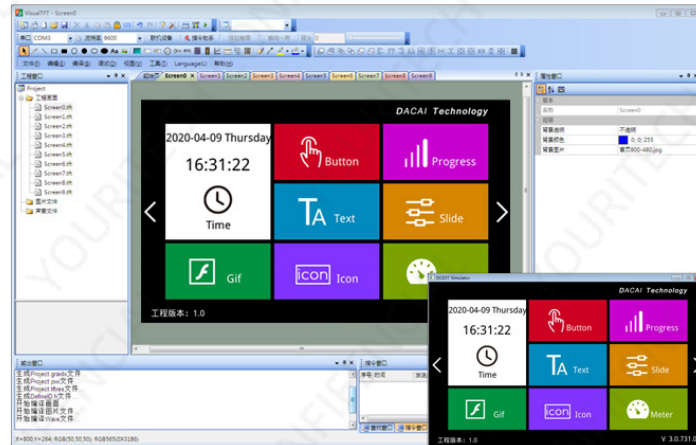


Diagram 10-1 VisualTFT Main interface

Any YOURITECH user can complete the complex human-computer interaction design within 30 Minutes by only 3 steps:

1. Prepare art design materials:

Arrange UI designers to design the images required for products such as start-up image, text background, button icon and prompt box.

2. Conduct image editing, scripting, control configuration and image downloading with VisualTFT software:

First of all, using the supporting host computer VisualTFT software, then typeset interface and configure controls of the pre-designed artwork pictures, run the "virtual serial port screen" for simulation, and finally the entire project can be completed download through SD / UART (depending on the hardware configuration of different models) to the internal memory of the serial port screen. The PC software will assign a unique ID number to each screen, picture and control in the project. Users can also write the required logic control and algorithms through the script editor embedded in the host computer to reduce the communication frequency between the screen and the motherboard.

3. User's single-chip microcomputer monitors and sends the corresponding serial port instructions to control the image display:

After the project is downloaded to the screen and when a button is pressed on the image, the user's MCU serial port will receive the button ID information or coordinate value uploaded by the screen. By parsing the ID number, the user can get the image position and function attributes of the current button. In this way, relevant peripheral device actions or image updating and display can be



controlled.

For non-touch products, the user MCU does not need to monitor the information uploaded by the button ID, but only needs to send relevant commands to switch screens and display text and pictures.

10.1 What is visual serial interface screen

‘Virtual Serial Screen’ is the first serial screen emulator in China, which is developed by YOURITECH Technology. After the user has created the program, corrected the configuration and compilation, then you can run it to test whether the interface design is correct. The simulation result is exactly the same as the real serial screen. Even if the user didn't purchase hardware, and directly connects to the ‘virtual serial port’ through their own MCU and RS232 serial port, they can still communicate with each other. Click button will upload the button control ID or coordinate information immediately, as Diagram 10-2 shows. Once the ‘virtual serial screen’ is debugged, the real hardware can be downloaded directly without any debugging.



Diagram 10-2 Online debugging of serial port of user's single-chip microcomputer and virtual serial port screen

10.2 The binding debugging of Keli and Virtual serial port screen

In order to further improve the development efficiency, users can also use the KEIL development environment to bind DEBUG with the ‘virtual serial screen’. When the program is single-step debugging, all running results can be presented on the ‘virtual serial screen’, which greatly saves engineering development time. As Diagram 10-3 shows. Once the engineering interface changes, the user no longer needs to download the image again to the serial screen, all the pre-evaluation of the project can be based on the PC side to complete.



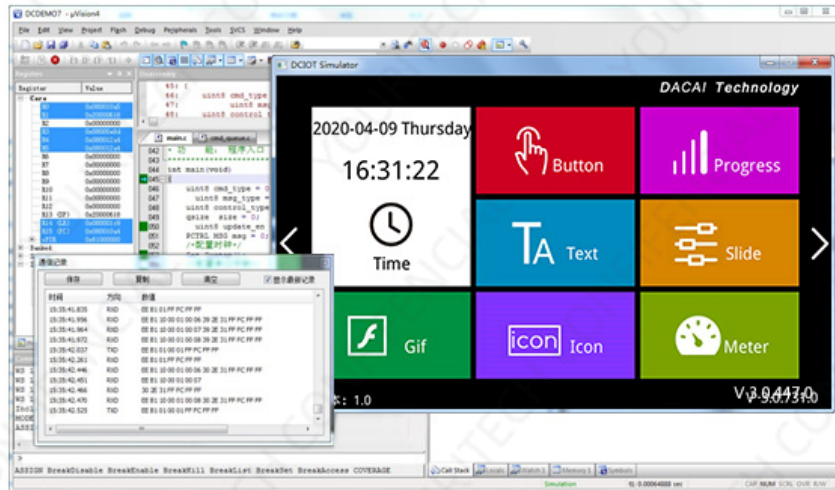


Diagram 11-3Keil develop environment and binding debug of virtual serial port screen

Note: The debugging of the virtual serial port screen requires keil software support. During the Debug process, enter dirvtreg in the command serial port, and SxIN needs to be listed (depending on the microcontroller, x may represent 0, 1, 2), if it is listed, keil has already The serial port of the single-chip microcomputer is virtualized to the register so that it can be used.



11. Disclaimer

This document provides information about the products of YOURITECH Technology (hereinafter referred to as YOURITECH Technology), in accelerating the progress of product development. Any routines, technical documents, CAD drawings and other information and information provided during the service process or other channels are only for reference, the customer has the right not to use or modify the reference by itself. The company does not provide any guarantee of completeness, reliability, etc. If the customer uses special, accidental or indirect losses caused by any reason during the use of the company, the company we do not assume any responsibility. Products of YOURITECH cannot be used as the sole control device for military, medical, life-saving or life-sustaining applications.

This document does not grant any license to intellectual property and does not grant any intellectual property license, express or implied, or by prohibition of speaking or otherwise. YOURITECH assumes no responsibility other than the liability stated by YOURITECH in the terms and conditions of sale of its products. Furthermore, YOURITECH makes no warranties, express or implied, regarding the sale or use of YOURITECH Technology products, including the suitability for the specific use of the products, their merchantability or infringement of any patents, copyrights or other intellectual property rights, no guarantee. YOURITECH Technology may make changes to product specifications and product descriptions at any time without notice.

