

INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Production Custom designs Installation

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Optical Bonding

Cover glass

System solutions

OEM Solutions

Custom Display

Mechanical design




■ Features

- Landscape, 5.7 inch VGA resolution.
- Super Slim / Super Light LCD monitor using long-life LED.
- High brightness (430 cd/m²)/ Wide viewing angle LCD monitor.
- TC on panel.



■ Dimensions

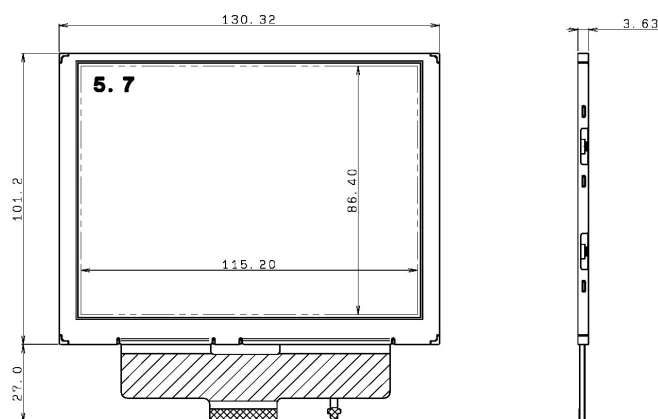

■ Specifications

RoHS compliant

Items	Specifications	Units	Notes
Display Size	14.4 (5.7)	cm (inch)	
Display Format	640 X RGB X 480 Stripe	---	
Dot Pitch	60.00(H) X 180.00(V)	μm	
Outline Dimensions	130.32 (H) X 101.2 (V) X 3.63 (D)	mm	
Weight	85.0	g	
Number of Colors	262,144	---	
Brightness	430 (TYP)	cd/m ²	
Viewing Angle(U/D/L/R)	80/80/80/80	deg.	CR≥10
Input Signal Type	Digital RGB signal (each 6bit parallel)	---	
Power Supplies	3.3/12.0/21.0/-7.0 (without B/L)	V	
Operating Temperature	-20 ~ +70	°C	
Storage Temperature	-30 ~ +80	°C	
Backlight	LED Backlight	---	
Remarks			

※ Specifications are subject to change without notice.

April 1, 2010

ORTUS TECHNOLOGY CO., LTD.

Sales HQ, Overseas Sales Dept.

2951-5 Ishikawa-machi, Hachioji City, Tokyo 192-8556, Japan
TEL +81-42-639-5121 FAX +81-42-639-5034

<http://www.ortustech.co.jp>

All Rights Reserved, Copyright (C) ORTUS TECHNOLOGY CO., LTD.

Contact