

INDUSTRIAL STRENGTH... Start Your Application From **YOURITECH**

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Production Custom designs Installation

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Optical Bonding

Cover glass

System solutions

OEM Solutions

Custom Display

Mechanical design




■ Features

- Landscape, 5.7 inch VGA resolution.
- Super Slim / Super Light LCD monitor using long-life LED.
- High brightness (400 cd/m²)/ Wide viewing angle LCD monitor.
- TC on panel.



■ Dimensions

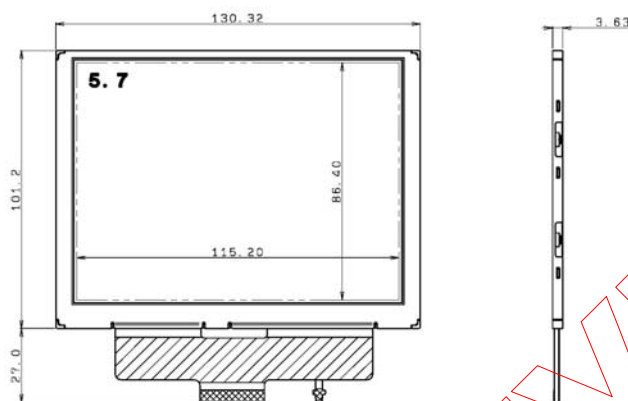

■ Specifications

RoHS compliant

Items	Specifications	Units	Notes
Display Size	14.4 (5.7)	cm (inch)	
Display Format	640 X RGB X 480 Stripe	--	
Dot Pitch	60.00(H) X 180.00(V)	μm	
Outline Dimensions	130.32 (H) X 101.2 (V) X 3.63 (D)	mm	
Weight	(85)	g	
Number of Colors	262,144	--	
Brightness	400 (TYP)	cd/m ²	
Viewing Angle(U/D/L/R)	60/65/80/80	deg.	CR ≥ 10
Input Signal Type	Digital RGB signal (each 6bit parallel)	--	
Power Supplies	3.3/12.0/21.0/-7.0 (without B/L)	V	
Operating Temperature	-20 ~ +70	°C	
Storage Temperature	-30 ~ +80	°C	
Backlight	LED Backlight	--	
Remarks			

※ Specifications are subject to change without notice.

April 15, 2010

ORTUS TECHNOLOGY CO., LTD.

Sales HQ, Overseas Sales Dept.

2951-5 Ishikawa-machi, Hachioji City, Tokyo 192-8556, Japan
TEL +81-42-639-5121 FAX +81-42-639-5034

<http://www.ortustech.co.jp>

All Rights Reserved, Copyright (C) ORTUS TECHNOLOGY CO., LTD.

Contact