

INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

Optical Bonding

In-house Manufacturing

Cover glass

System solutions

OEM Solutions

Custom Display

Production Custom designs Installation

Mechanical design



MODEL NO : ET024QV02-T

MODEL VERSION: 01

SPEC VERSION : 1.0

ISSUED DATE: 2022-12-29

☐ Preliminary Specification

☒ Final Product Specification

Customer : _____

Approved by	Notes

Youri Confirmation

Prepared by	Reviewed by	Approved by
John	Johnny	Wang

1. Introduction

1.1 Scope of application

LCD specification: Dots 240xRGBx320

As to basic specification of the driver IC, refer to the IC (JD9852) specification and data book.

All material & processing of the LCD module should be Lead Free.

1.2 TFT features:

Structure: TFT PANNEL+IC +FPC+BL;

IPS Type LCD

240 dot-segment and 320 dot-common outputs;

65K/262K Color can be selected by software;

White LED back light;

1lane MIPI interface

1.3 Applications:

2. LCM General specification

ITEM	Standard value	Unit
LCD Type	Normally black	--
Drive element	TFT active matrix	--
Number of pixels	240*3RGB(H)X320 (V)	Dots
Pixel arrangement	RGB stripe	--
Pixel Pitch (W*H)	0.153(H) x0.153 (V)	mm
Active area	36.72(H) x 48.96(V)	mm
Viewing direction	ALL O'CLOCK	--
TFT Driver IC	JD9852	--
TFT interface	1lane MIPI interface	--
Approx. Weight	TBD	g
LCM Size(W*H*T)	40.44(W)x57.00(H)x2.20(T)	mm
Touch structure	--	--
Touch Driver IC	--	--
Touch Interface	--	--



3.Absolute Maximum Rating

Characteristics	Symbol	Min.	Max.	Unit
LCM Operating Temperature	T _{OPR}	-20	+70	°C
LCM Storage Temperature	T _{STG}	-30	+80	°C
Humidity	RH	--	90	%

4.Electrical Characteristics

4.1 TFT DC Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage for I/O	VDDIO	1.65	1.8	3.3	V
Supply Voltage for(DC/DC)	VDD	2.7	2.8	3.3	V
Supply Voltage for(DC/DC)	AVDD	--	--	--	V
Supply Voltage for(DC/DC)	AVEE	--	--	--	V

4.2Back-Light Unit Characeristics


The back-light system is an edge-lighting type with 4 white LEDs. The characteristics of the back-light are shown in the following tables.

Characteristics	Symbol	Min.	Type	Max.	Unit	Notes
Forward Voltage	V _F	2.9	--	3.3	V	--
Forward current	I _F	--	80	--	mA	--
Luminance(With LCD)	L _v	--	600	--	cd/m ²	--
LED life time	N/A	--	30,000	--	Hr	Note 1

Note:

- (1) The “LED life time” is defined as the module brightness decrease to 50% of original brightness at I_L=20mA/LED. The LED life time could be decreased if operating I_L is larger than 25mA/LED.

Backlight circuit diagram shown in below:

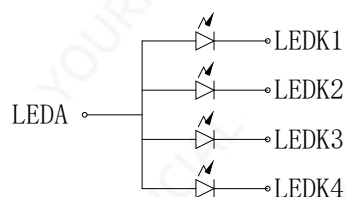

5. Module Function Description


5.1 LCM Pin Descriptions

Pin No.	Symbol	Functional	Notes
1	GND	Power Ground	
2	NC	NC	
3	RESET	Reset signal input terminal. Active at 'L' .	
4	ID	ID read PIN for ID circuit.	
5	TE	Frame head pulse for tearing effect.	
6	GND	Power Ground	
7	NC	NC	
8	IOVCC (1.8V)	I/O Voltage (VDDI to DGND): 1.65V ~ 3.3V	
9	VCI(2.8V)	Power supply : 2.7V ~ 3.3V	
10	GND	Power Ground	
11	NC	NC	
12	GND	Power Ground	
13	CLKP	Positive polarity of low voltage differential clock signal	
14	CLKN	Negative polarity of low voltage differential clock signal	
15	GND	Power Ground	
16	D0P	Positive polarity of low voltage differential data 1 signal	
17	D0N	Negative polarity of low voltage differential data 1 signal	
18	GND	Power Ground	
19	LEDA	Power supply for backlight anode input terminal.terminal.	
20	LEDK	Power supply for backlight cathode input	


6. Timing Characteristics

Internal DC/DC power mode IOVCC =1.65V ~ 3.3V, VCI=VCIP=2.6V ~ 3.3V.

Power on sequence

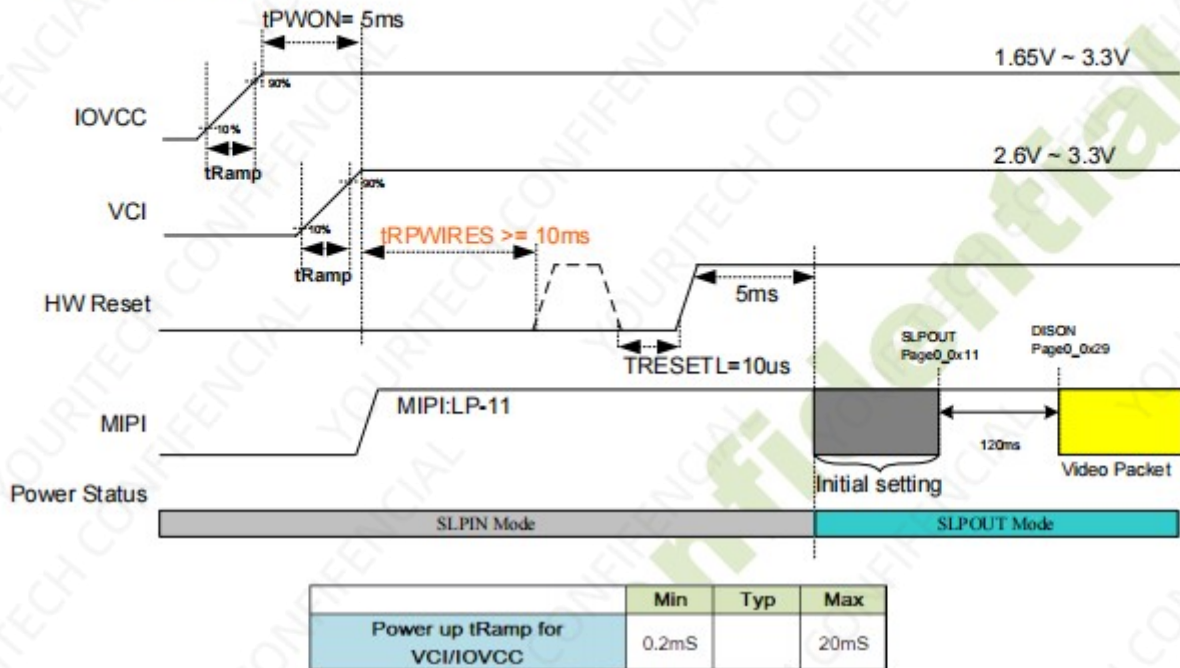

Power off sequence

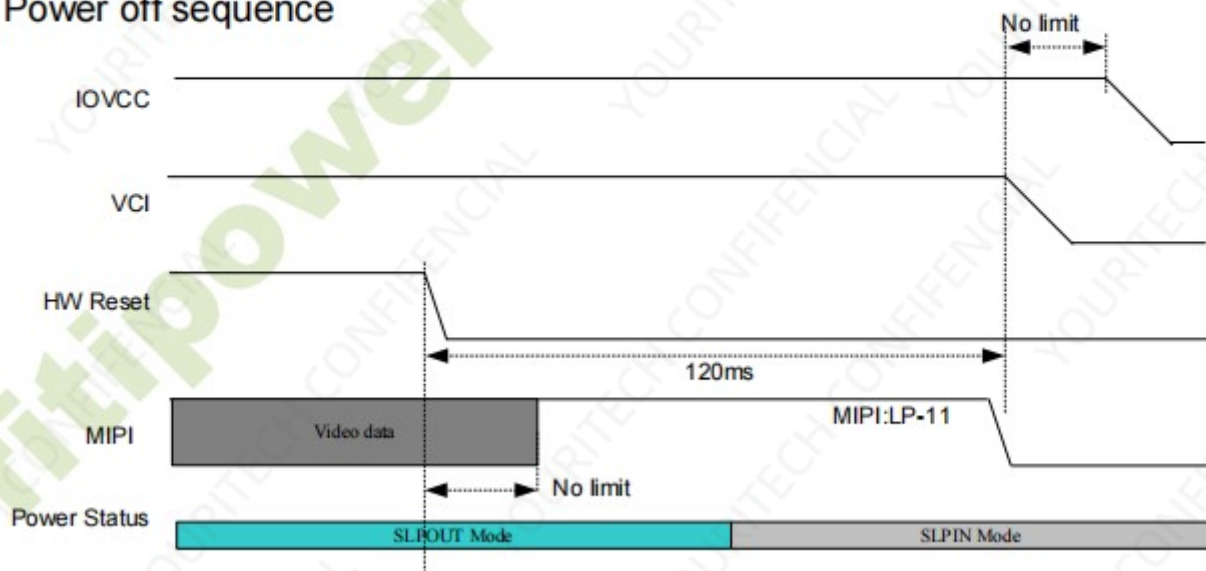

Timings for DSI Video mode

Vertical Timings

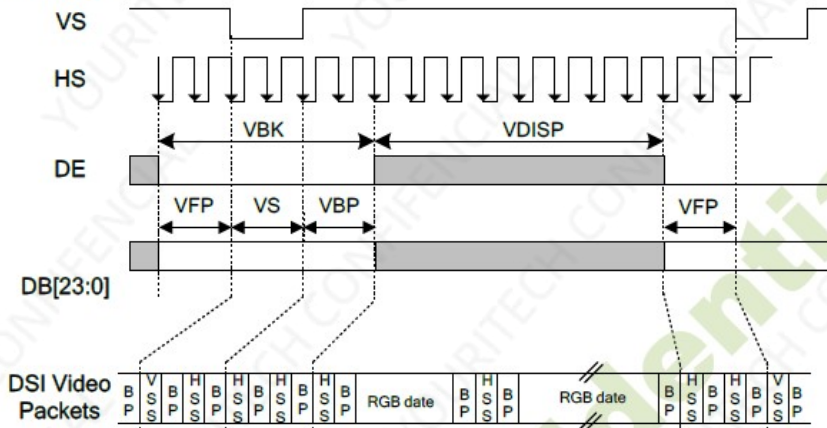


Figure. 10.11 Vertical Timings for DSI Video mode I/F

Resolution=240x320 (TA=25°C, IOVCC=1.8V, VCI=2.8V)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Vertical low pulse width	VS	-	2	-	Note(1)	Line
Vertical front porch	VFP	-	2	-	-	Line
Vertical back porch	VBP	-	2	-	Note(1)	Line
Vertical blanking period	VBK	VS+VBP+VFP	6	-	-	Line
Vertical active area	-	VDISP	-	320	-	Line
Vertical Refresh rate	VRR	-	-	60	-	Hz

Figure. 10.12 Vertical Timings for DSI Video mode I/F

Horizontal Timings

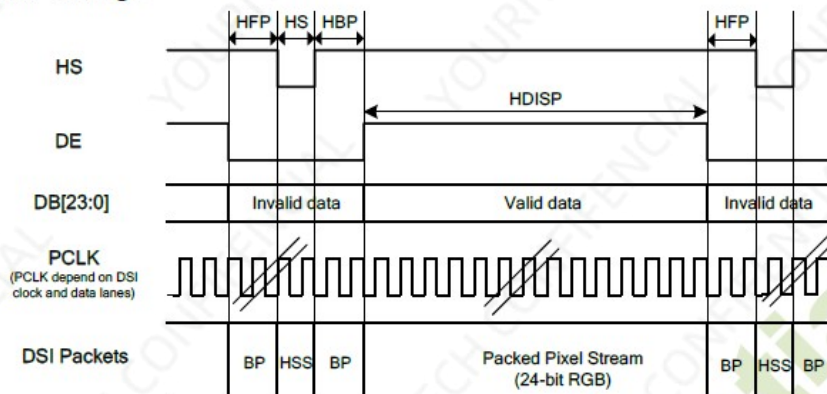


Figure. 10.13 Horizontal Timing for DSI Video mode I/F

Resolution=240x320 (TA=25°C, IOVCC=1.8V, VCI=2.8V)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
HS low pulse width	HS	-	6	-	78	DCK
Horizontal back porch	HBP	-	5	-	78	DCK
Horizontal front porch	HFP	-	5	-	78	DCK
Horizontal blanking period	HBLK	HS+HBP+HFP	16	-	88	DCK
Horizontal active area	HDISP	-	-	240	-	DCK

Note: (1) HS+HBP>0.5uS.

(2) HFP>0.5uS.

Table 10.11 Horizontal Timings for DSI Video mode I/F

Reset Timing:

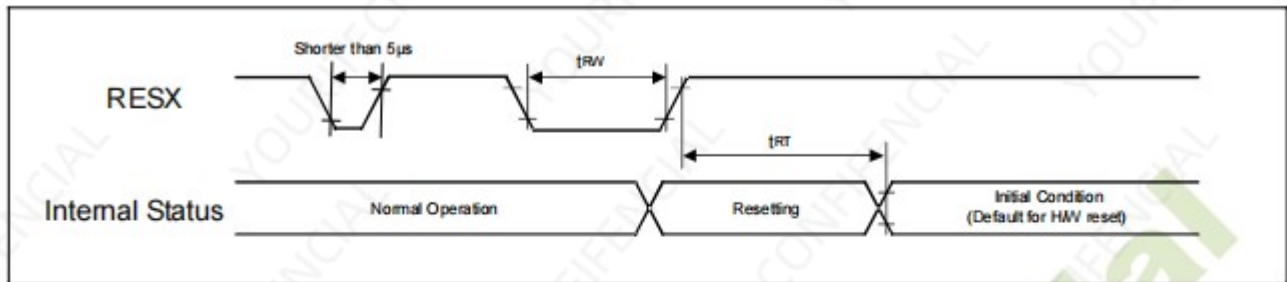



Figure. 10.5 Reset input timings

Symbol	Parameter	Related pins	Min.	Max.	Unit
t_{RW}	Reset pulse width ⁽²⁾	RESX	10	-	μs
t_{RT}	Reset complete time ⁽³⁾	-	-	5 (Note 5)	ms
		-	-	120 (Note 6, 7)	ms

- Note:** (1) The reset complete time also required time for loading ID bytes from OTP to registers. This loading is done every time when there is HW reset cancel time (tRT) within 5 ms after a rising edge of RESX.
(2) Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below.

RESX Pulse	Action
Shorter than 5 μs	Reset Rejected
Longer than 10 μs	Reset
Between 5 μs and 10 μs	Reset Start

- (3) During the resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out –mode. The display remains the blank state in Sleep In –mode) and then returns to Default condition for HW reset.
(4) Spike Rejection also applies during a valid reset pulse as shown below.

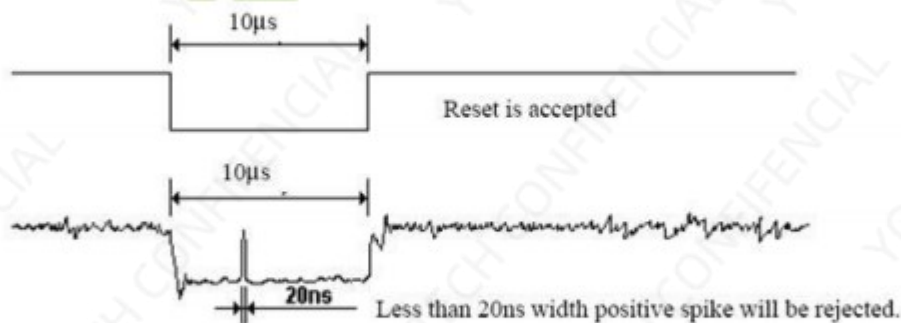

- (5) When Reset is applied during Sleep In Mode.
(6) When Reset is applied during Sleep Out Mode.
(7) It is necessary to wait 5msec after releasing RESX before sending commands. Also Sleep Out command cannot be sent for 120msec.

7. Optical Characteristics

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle Range	Horizontal	Θ3	CR>10	70	80	-	Deg.	Note1
		Θ9		70	80	-	Deg.	
	Vertical	Θ12		70	80	-	Deg.	
		Θ6		70	80	-	Deg.	
Contrast ratio		CR	Θ = 0°	1000	1500	-		Note2
Transmittance		Tr		4.0	4.65		%	Note3
Color Gamut		CG		65	70		%	
Reproduction of color	Red	Rx	Θ = 0°	0.632	0.652	0.672		Note4 (Based on C Light)
		Ry		0.302	0.322	0.342		
	Green	Gx		0.256	0.276	0.296		
		Gy		0.562	0.582	0.602		
	Blue	Bx		0.121	0.141	0.161		
		By		0.071	0.091	0.111		

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
White Chromaticity		Wx	Θ = 0°	0.287	0.307	0.327		
		Wy		0.314	0.334	0.354		
Response Time (Rising + Falling)		T _r + T _f	Ta= 25° C Θ = 0°		35	45	ms	Note 5

Note:

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o' clock direction and the vertical or 6, 12 o' clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).
2. Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (see FIGUR 1)
Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Transmittance is the Value without APF and without CG.
4. The color chromaticity coordinates specified in the above table shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
5. The electro-optical response time measurements shall be made as FIGURE 2 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_f .

Figure1 Measurement Set Up


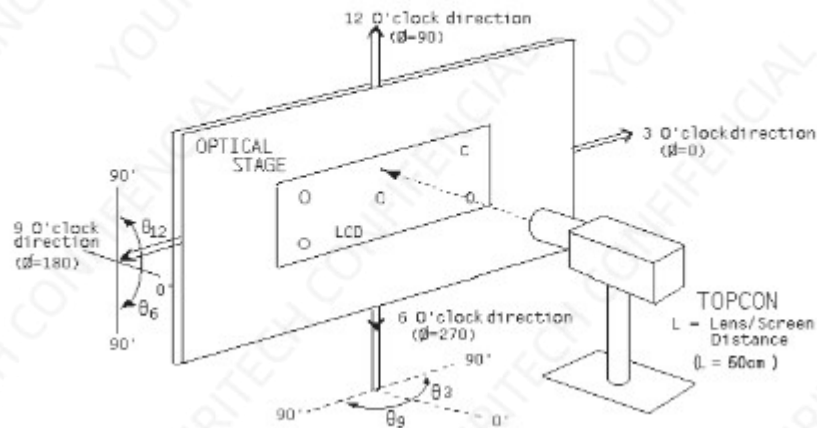


Figure2 Response Time Testing

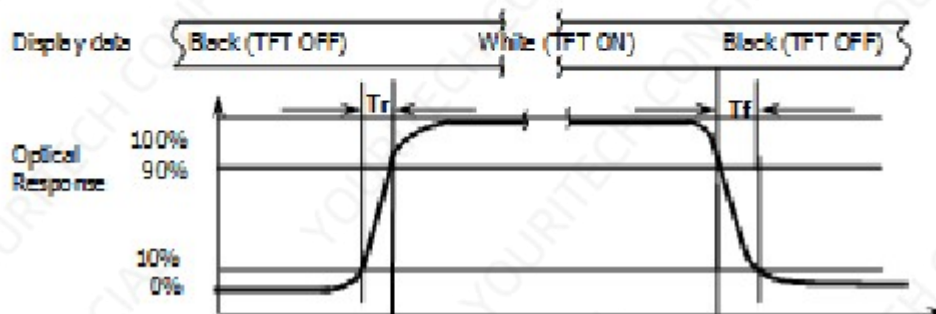

8. Reliability Test Item

No.	Test Item	Test Condition	Notes
1	High Temp. Storage	+80°C / 96H	1. Functional test isOK. Missing Segment,short, unclear segment non-display,display abnormally and liquid crystal leakare un-allowed. 2. No low temperature bubbles,end seal loose andfall, frame rainbow.
2	Low Temp. Storage	-30°C / 96H	
3	High Tempe. Operating	+70°C / 96H	
4	Low Tempe. Operating	-20°C / 96H	
5	High Temperature /Humidity storage	50°C x 90%RH /96H	
6	Thermal and cold shock	Static state, -20°C (30min) ~60°C (30min) , 50 cycles	

9. Packing Method----TBD

- END -