

# INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Optical Bonding

Cover glass

System solutions

OEM Solutions

Custom Display

Production Custom designs Installation

Mechanical design





CERT:0105Q13108R0M/4400



(ISO9001)

## PRODUCT SPECIFICATIONS

MODULE NO: ET035HD01-R

For Customer: \_\_\_\_\_

Approved by: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Please sign the cover page of the spec for your approval and return it to our local sales **within a month** after your receipt of the spec from YOURITECH. In the case YOURITECH does not receive the signed spec even after one month later, in general we will consider that the spec was already accepted by your company.

| Prepared | Checked | Approved | Date |
|----------|---------|----------|------|
|          |         |          |      |

# History of Versions and Modifications

| Version | Modifications            | Date       |
|---------|--------------------------|------------|
| 1.0     | Generation first version | 2023-06-24 |
| 1.1     | 修改盖板外形和功能片外形             | 2023-12-05 |
|         |                          |            |
|         |                          |            |
|         |                          |            |
|         |                          |            |
|         |                          |            |
|         |                          |            |

# PRODUCT SPECIFICATIONS

|                                            |    |
|--------------------------------------------|----|
| 1.LCD MODULE PHYSICAL DATA.....            | 4  |
| 2.EXTERNAL DIMENSIONS.....                 | 5  |
| 3.ABSOLUTE MAXIMUM RATINGS.....            | 6  |
| 4.ELECTRICAL CHARACTERISTICS.....          | 6  |
| 5.ELECTRO-OPTICAL CHARACTERISTICS.....     | 7  |
| 6.INTERFACE PIN CONNECTIONS.....           | 10 |
| 7.RELIABILITY.....                         | 11 |
| 8. SPECIFICATION OF QUALITY ASSURANCE..... | 12 |
| 9.SUGGESTIONS FOR USING LCD MODULES.....   | 19 |
| 10.PACKING.....                            | 20 |

## 1. LCD MODULE PHYSICAL DATA

### ● General Description

| Item                  | Standard Value                | Unit    |
|-----------------------|-------------------------------|---------|
| LCD Type              | Transmissive TFT , 262K color | ---     |
| Number of Dots        | 720X(RGB)X1280                | ---     |
| Viewing Direction     | ALL                           | o'clock |
| LCM Outline Dimension | 51.32(H) X 87.01(V) X3.37 (T) | mm      |
| Active area           | 43.2(H) X78.72 (V)            |         |
| Operating temperature | -20℃~70℃                      | ---     |
| Storage temperature   | -30℃~80℃                      | ---     |
| Driving IC            | ST7703-V1-G5-D                | ---     |
| CTP IC                | CST18858                      | ---     |
| Approx. weight        | TBD                           | g       |

### ● The backlight electrical-optical characteristics

| Item              | Symbol | Min   | Typ | Max | Unit | Unit           |
|-------------------|--------|-------|-----|-----|------|----------------|
| Forward voltage   | Vf     | -     | 16  | -   | V    | If=40mA/Ta=25℃ |
| Uniformity        | △Bp    | 80    | 90  |     | %    |                |
| Power Consumption |        |       | 700 |     | MW   |                |
| LED Life Time     |        | 35000 |     |     | HR   |                |

2.EXTERNAL DIMENSIONS

The drawing includes three views: 正视图 (Front View), 侧视图 (Side View), and 背视图 (Back View). Dimensions are provided in millimeters (mm) and inches (").

**TP NOTES:**

1. 结构GFF, IC: CST18858
2. 工作电压 2.8V~3.3V
3. 基板: 钢化玻璃, 表面硬度≥H(750g)
4. 厚度: CS≤450μm, DOL≤8μm
5. 透光率≥84%
6. 工作环境: -10°C~+60°C, ≤90%RH
7. 储存环境: -20°C~+70°C, ≤90%RH
8. 未注尺寸公差按±0.2mm
9. 符合RHOS标准

**LCM NOTES:**

1. DISPLAY TYPE: Main LCD: 3.5" TFT
2. OPERATING TEMP: -20°C~70
3. STORAGE TEMP: -30°C~80°C
4. MAIN LCD DRIVER: ST7703
5. BACKLIGHT: 10CHIP-WHITE LED
6. 产品满足ROHS要求
7. GENERAL TOLERANCE: ±0.2

**GENERAL TOLERANCE**

| DIM.     | TOL.  |
|----------|-------|
| 0 ~ 5    | ±0.10 |
| 6 ~ 15   | ±0.12 |
| 16 ~ 50  | ±0.15 |
| 51 ~ 250 | ±0.20 |
| HOLE     | ±0.10 |
| ANGLE    | ±0.5° |

**TP PIN ASSIGNMENT**

| PIN# | Assignment |
|------|------------|
| 1    | VDD (3.0V) |
| 2    | RST (3.0V) |
| 3    | SDA (3.0V) |
| 4    | SCL (3.0V) |
| 5    | INT (3.0V) |
| 6    | GND        |


**TP DRAWING**

| REV:             | 0/B          |
|------------------|--------------|
| SHEET:           | 1/1          |
| Project          | SCALE: N.T.S |
| UNIT: mm         | TITLE:       |
| DRAWING          | APPROVE      |
| NAME: Jason      | FILE NAME:   |
| DATE: 2024.05.21 | FILE NO.:    |
| PART NO.:        |              |

TP 图纸

Version: 1.0

5 / 22

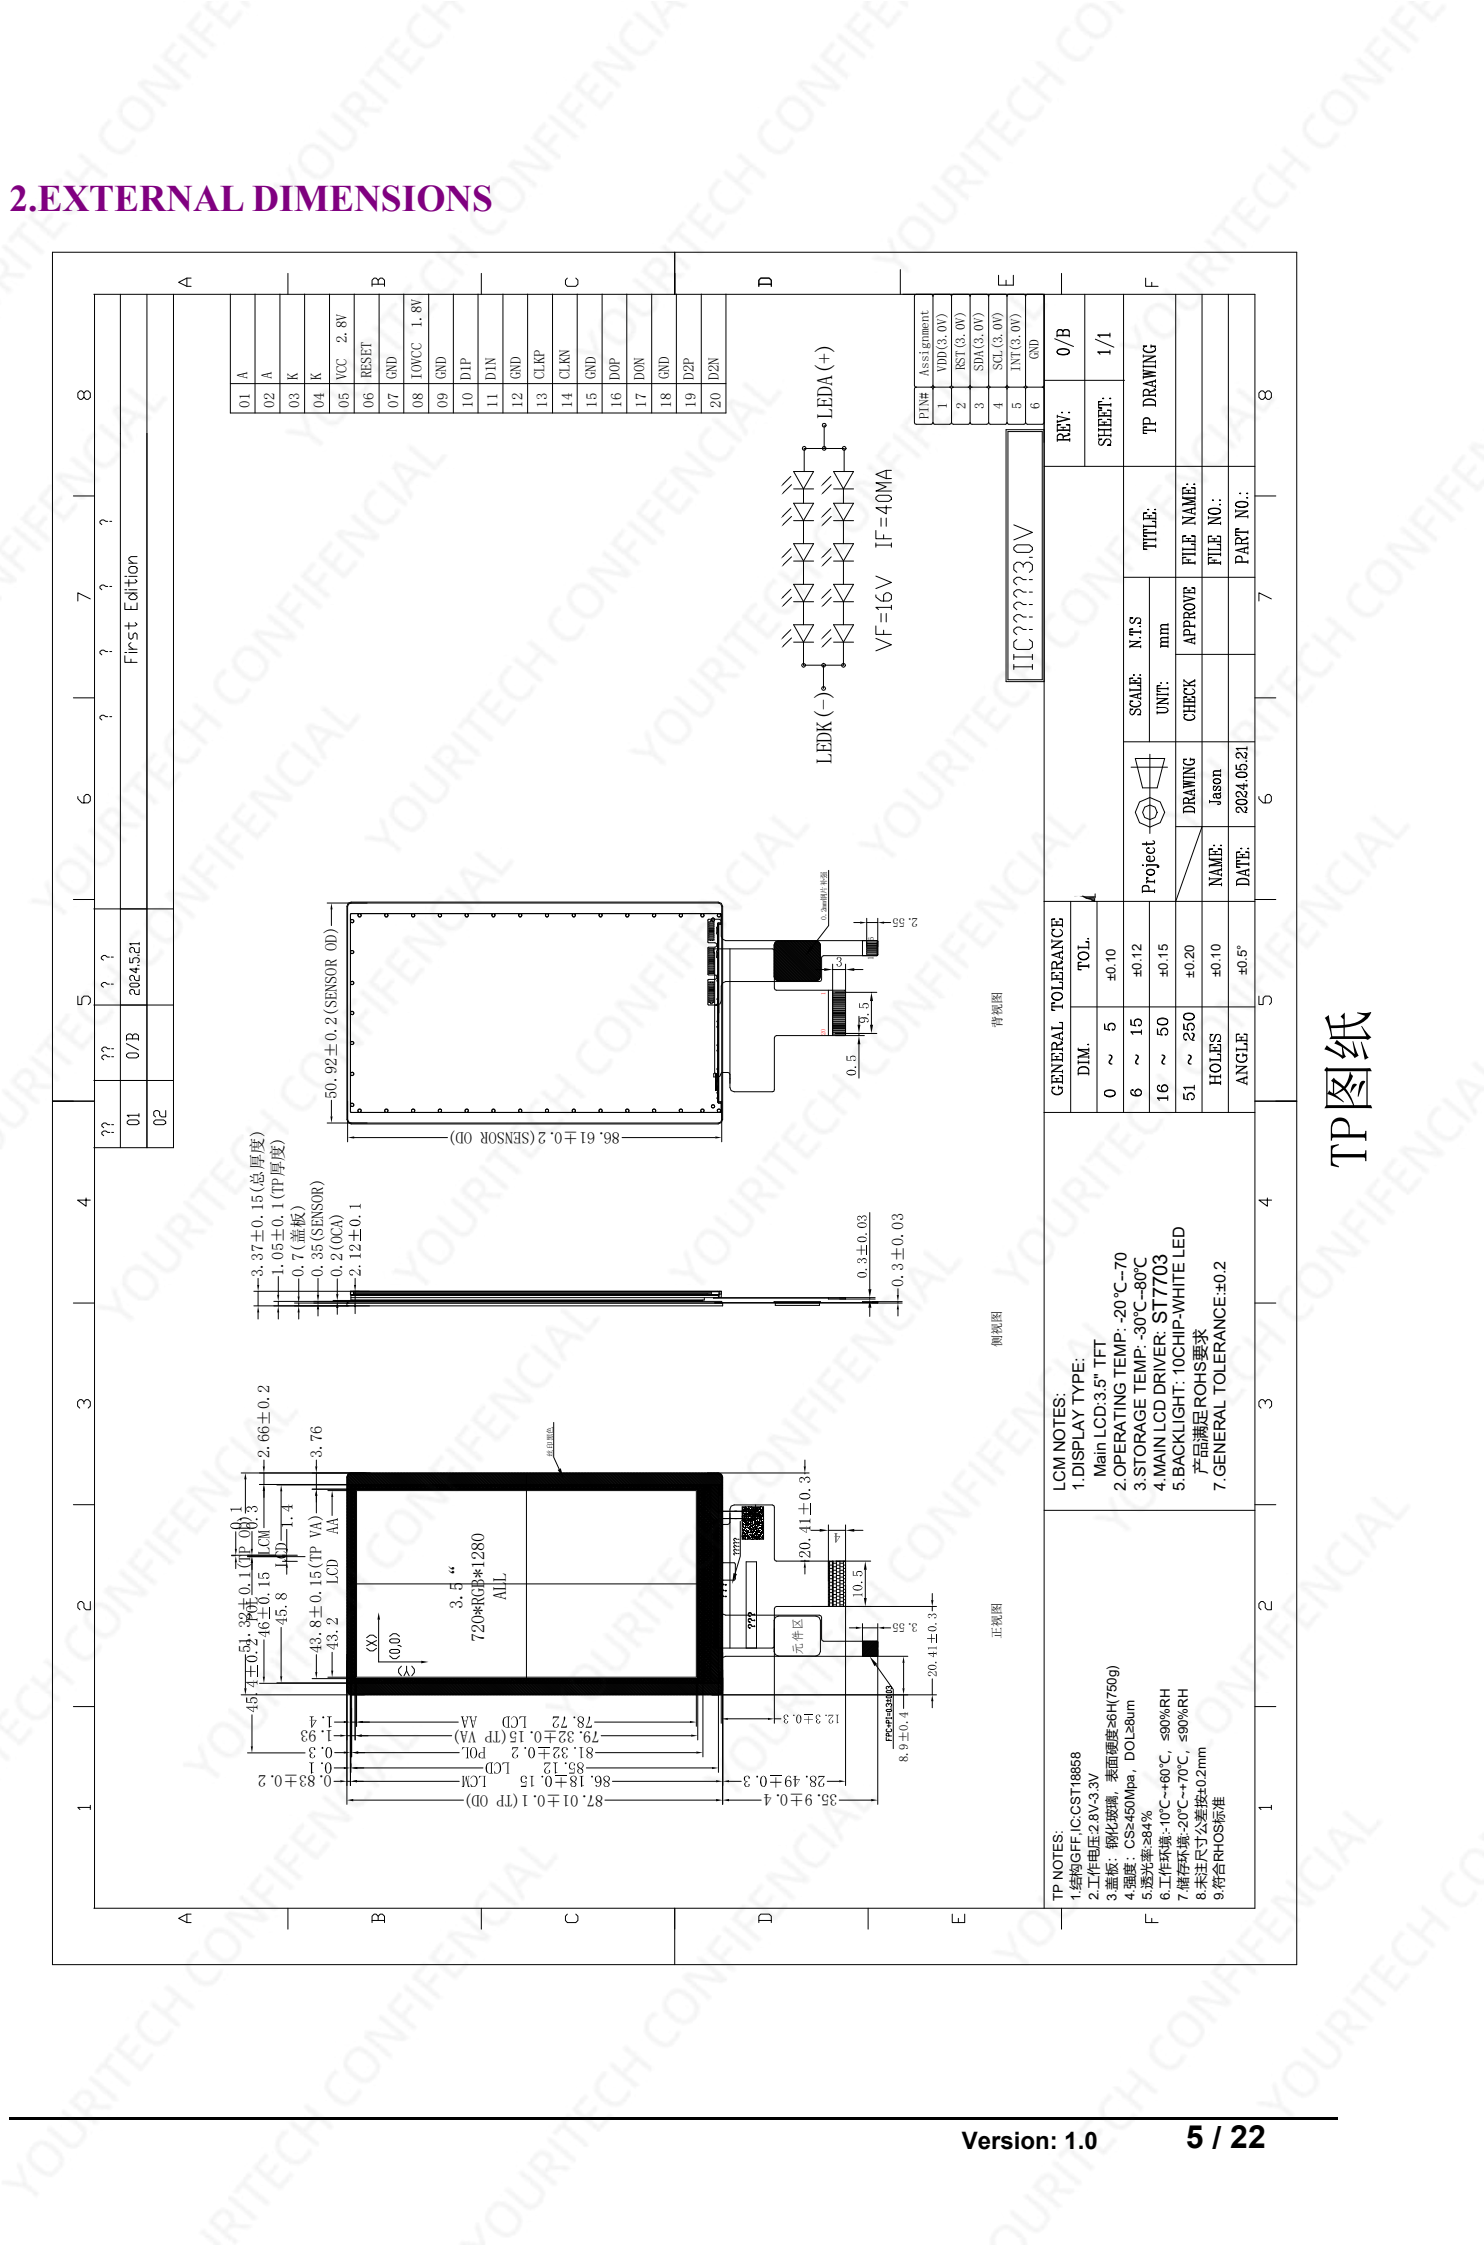

2.EXTERNAL DIMENSIONS

The drawing includes three views: 正视图 (Front View), 侧视图 (Side View), and 背视图 (Back View). Dimensions are provided in millimeters (mm) and inches (").

**TP NOTES:**

1. 结构GFF, IC: CST18858
2. 工作电压 2.8V~3.3V
3. 基板: 钢化玻璃, 表面硬度 > 8H (750g)
4. 厚度: CS < 450μm, DOL < 8μm
5. 透光率 > 84%
6. 工作环境: -10°C ~ +60°C, ≤ 90% RH
7. 储存环境: -20°C ~ +70°C, ≤ 90% RH
8. 未注尺寸公差按 ±0.2mm
9. 符合 RHOS 标准

**LCM NOTES:**

1. DISPLAY TYPE: Main LCD: 3.5" TFT
2. OPERATING TEMP: -20°C ~ 70
3. STORAGE TEMP: -30°C ~ 80°C
4. MAIN LCD DRIVER: ST7703
5. BACKLIGHT: 10CHIP-WHITE LED
6. 产品满足 ROHS 要求
7. GENERAL TOLERANCE: ±0.2

**GENERAL TOLERANCE**

| DIM.     | TOL.  |
|----------|-------|
| 0 ~ 5    | ±0.10 |
| 6 ~ 15   | ±0.12 |
| 16 ~ 50  | ±0.15 |
| 51 ~ 250 | ±0.20 |
| HOLE     | ±0.10 |
| ANGLE    | ±0.5° |

**TP PIN ASSIGNMENT**

| PIN# | Assignment |
|------|------------|
| 1    | VDD (3.0V) |
| 2    | RST (3.0V) |
| 3    | SDA (3.0V) |
| 4    | SCL (3.0V) |
| 5    | INT (3.0V) |
| 6    | GND        |

**TP DRAWING**

| REV. | 0/B |
|------|-----|
| 1/1  |     |

**TP TITLE**

| SCALE | UNIT | FILE NAME |
|-------|------|-----------|
| N.T.S | mm   |           |

**TP PART NO.**

| DATE       | NAME  | PROJECT | DRIVING | APPROVE | FILE NO. | PART NO. |
|------------|-------|---------|---------|---------|----------|----------|
| 2024.05.21 | Jason |         |         |         |          |          |

TP 图纸

Version: 1.0

5 / 22

### 3.ABSOLUTE MAXIMUM RATINGS

| Item                     | Symbol    | Rating  | Unit |
|--------------------------|-----------|---------|------|
| Operating temperature    | Top       | -20-70  | °C   |
| Storage temperature      | Tst       | -30-80  | °C   |
| Supply voltage for logic | VCC       | 2.8-3.3 | V    |
| Driver supply voltage    | VGH - VGL | 0-30.0  | V    |

**NOTE:**

1. If the module is used above these absolute maximum ratings. It may become permanently damaged. Using the module within the following electrical characteristic conditions are also exceeded, the module will malfunction and cause poor reliability.
2. VCC>GND must be maintained.

### 4.ELECTRICAL CHARACTERISTICS

#### ● DC Characteristics

| Item                                         | Symbol | Condition | Min  | Typ  | Max | Unit |
|----------------------------------------------|--------|-----------|------|------|-----|------|
| Voltage for logic                            | VCC    | Ta=25°C   | 2.5  | 2.8  | 3.3 | V    |
| Voltage for analog                           | VCI    | Ta=25°C   | 2.5  | 2.8  | 3.3 | V    |
| Voltage for I/O                              | IOVCC  | Ta=25°C   | 1.65 | 1.85 | 2.0 | V    |
| Current consumption for LCD normal operation | IDD    | VDD = 2.8 | -    | TBD  |     | mA   |

#### ● AC Characteristics

Refer to the SPEC of : ST7703-V1-G5-D TP:CST18858

## 5.ELECTRO-OPTICAL CHARACTERISTICS


| Item                                 | Symbol            | Condition                              | Min  | Typ  | Max  | Unit              | Remark |
|--------------------------------------|-------------------|----------------------------------------|------|------|------|-------------------|--------|
| Response time                        | Tr+Tf             | $\Theta=0^\circ$ ;<br>$\Phi=0^\circ$ ; | -    | 35   | 50   | ms                | Note4  |
| Contrast ratio                       | Cr                |                                        | 1000 | 1500 | -    | -                 | Note3  |
| Luminance uniformity                 | $\delta$<br>WHITE |                                        | 80   | -    | -    | %                 | Note7  |
| Surface luminance                    | Lv                |                                        | -    | 430  | -    | cd/m <sup>2</sup> | Note6  |
| View angle range<br>(with polarizer) | Top               | CR $\geq$ 10                           | -    | 80   | -    | Degree            | Note5  |
|                                      | Bottom            |                                        | -    | 80   | -    |                   |        |
|                                      | Left              |                                        | -    | 80   | -    |                   |        |
|                                      | Right             |                                        | -    | 80   | -    |                   |        |
| CIE (X, Y)                           | Rx                | $\Theta=0^\circ$                       | 0.62 | 0.64 | 0.66 | -                 | Note8  |
|                                      | Ry                |                                        | 0.31 | 0.33 | 0.35 |                   |        |
|                                      | Gx                |                                        | 0.34 | 0.36 | 0.38 |                   |        |
|                                      | Gy                |                                        | 0.56 | 0.58 | 0.60 |                   |        |
|                                      | Bx                |                                        | 0.10 | 0.12 | 0.14 |                   |        |
|                                      | By                |                                        | 0.07 | 0.09 | 0.11 |                   |        |
|                                      | Wx                |                                        | 0.29 | 0.31 | 0.33 |                   |        |
|                                      | Wy                |                                        | 0.31 | 0.33 | 0.35 |                   |        |

Note 1: Ambient temperature =  $25 \pm 2^\circ\text{C}$ ;

Note 2: To be measured in the dark room;


Note 3: To be measured at the center area of the panel with a view cone of  $1^\circ$  by BM-7, after 10 minutes operation (module).

Note 4: Color tolerance plus or minus = 0.02

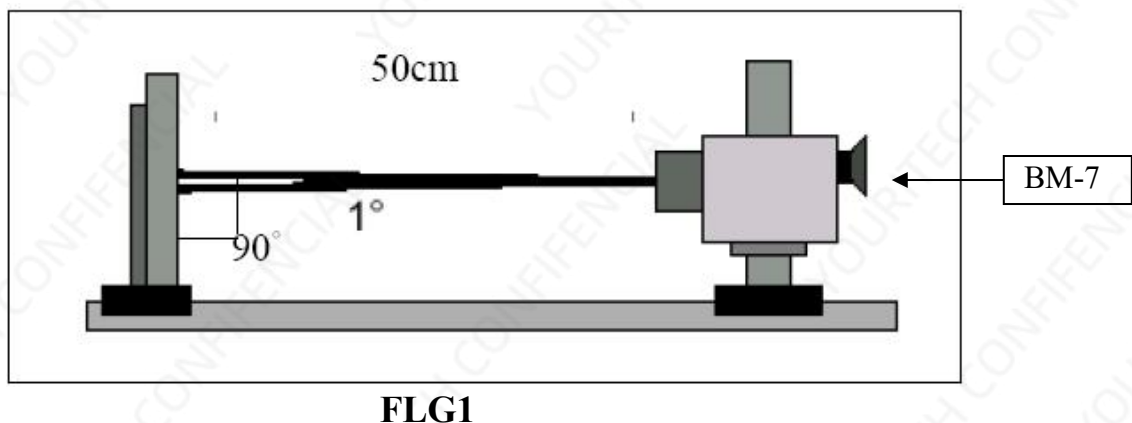

**Note 4: Define the response time:**

The output signals of photo detector are measured when the input signals are charged from “black” to “white”(falling time) and from “white” to “black”(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes. Refer to figure as below.

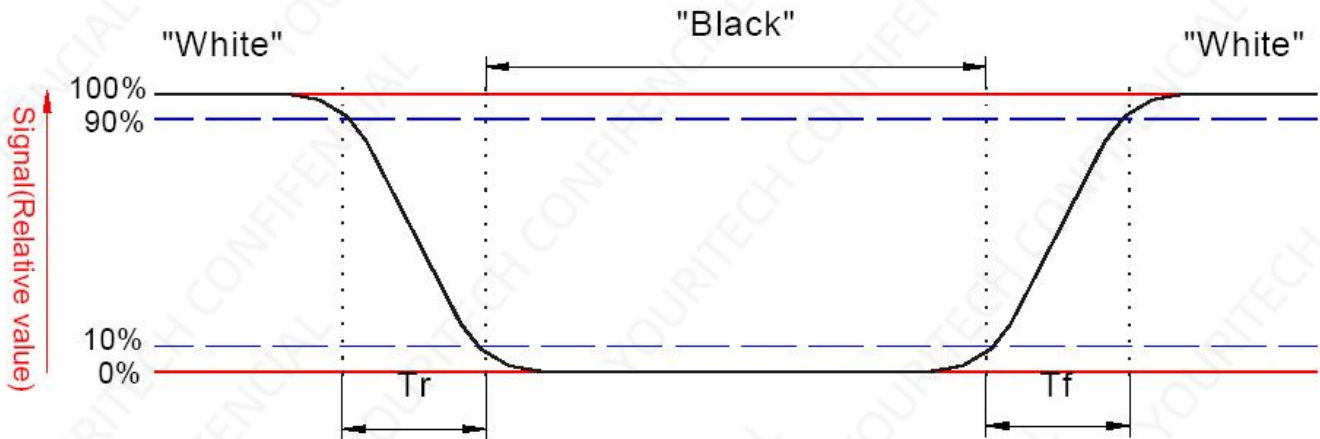

**FLG2**

**Note 5: Contrast Ratio (CR)** is defined mathematically as For more information from FLG3

$$\text{Contrast Ratio} = \frac{\text{Average surface luminance with all white pixel (P1,P2,P3,P4,P5,P6,P7,P8,P9)}}{\text{Average surface luminance with all black pixel (P1,P2,P3,P4,P5,P6,P7,P8,P9)}}$$


**Note 6: Surface luminance** is the center point across the LCD surface 500mm from the surface with all pixel displaying white, For more information see the FLG3

$$L_v = \text{Average Surface luminance with all white pixel(P1,P2,P3,P4,P5,P6,P7,P8,P9)}$$

**Note 7: The uniformity in surface luminance,  $\delta$  white** is determined by measuring luminance at each test position 1to 5, and then dividing the maximum luminance of 5 points luminance by minimum luminance of 5 points luminance. For more information see FLG3.

$$\delta \text{ WHITE} = \frac{\text{Minimum surface luminance with all white pixel(P1,P2,P3,P4,P5,P6,P7,P8,P9)}}{\text{Maximum surface luminance with all white pixel(P1,P2,P3,P4,P5,P6,P7,P8,P9)}}$$

**Note 8: CIE(X, Y)**, the X, Y value is determined by measuring luminance at each test position 1 to 5, and then make average value. For more information see FLG3.

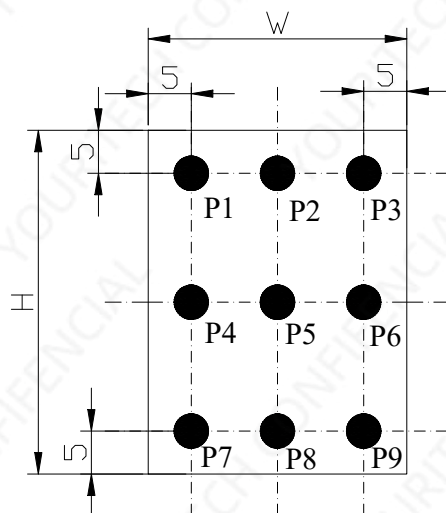


**H,V: Active area**

**Light source spot size:  $\Phi=2.0\text{mm}$**

**Measure device: BM-7**

### FLG3

**Note 9:** Viewing angle is the angle at which the contrast ratio is greater than 2, TFT module the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see the FLG 4.

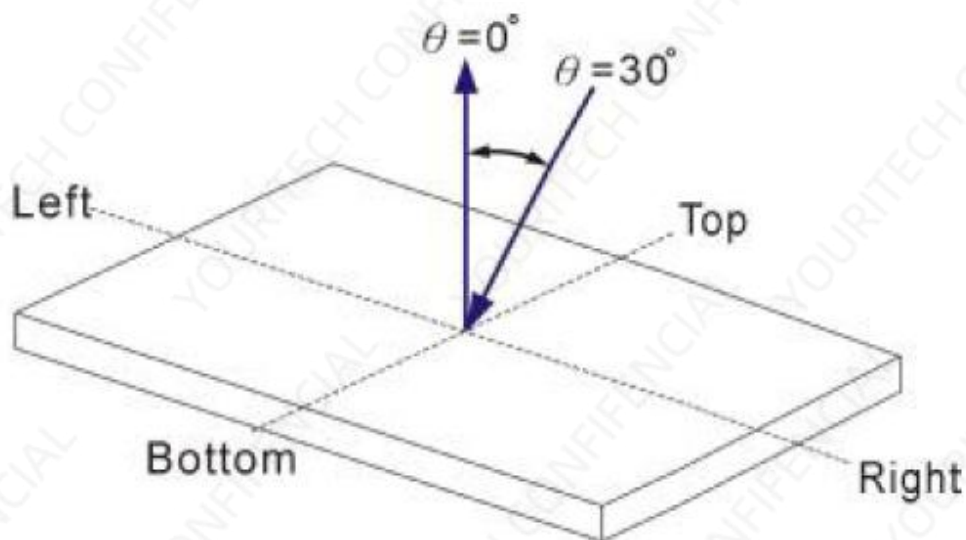

### FLG4

## 6. INTERFACE PIN CONNECTIONS

Interface type: MIPI 3L

| NO. | Symbol | Level | Function                           |
|-----|--------|-------|------------------------------------|
| 1   | A      |       | LED power anode                    |
| 2   | A      |       | LED power anode                    |
| 3   | K      |       | LED power cathode                  |
| 4   | K      |       | LED power cathode                  |
| 5   | VCI    |       | Power setting                      |
| 6   | RESET  |       | RESET PIN                          |
| 7   | GND    |       | Ground                             |
| 8   | IOVCC  |       | Power supply for digital interface |
| 9   | GND    |       | Ground                             |
| 10  | D1P    |       | MIPI Data pin Positive             |
| 11  | D1N    |       | MIPI Data pin Positive             |
| 12  | GND    |       | Ground                             |
| 13  | CLKP   |       | Mipi clock signal                  |
| 14  | CLKN   |       | Mipi clock signal                  |
| 15  | GND    |       | Ground                             |
| 16  | D0P    |       | MIPI Data pin Positive             |
| 17  | D0N    |       | MIPI Data pin Positive             |
| 18  | GND    |       | Ground                             |
| 19  | D2P    |       | MIPI Data pin Positive             |
| 20  | D2N    |       | MIPI Data pin Positive             |

| PIN# | Assignment |
|------|------------|
| 1    | VDD (3.0V) |
| 2    | RST (3.0V) |
| 3    | SDA (3.0V) |
| 4    | SCL (3.0V) |
| 5    | INT (3.0V) |
| 6    | GND        |

TP:

## 7.RELIABILITY

| NO | Test Item                            | Description                                                                                                                                                                                                                                                                                                                                         | Test Condition                                                                                                                                                                 |
|----|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | High temperature storage             | Endurance test applying the high storage temperature for a long time                                                                                                                                                                                                                                                                                | 80°C,96 H                                                                                                                                                                      |
| 2  | Low temperature storage              | Endurance test applying the low storage temperature for a long time                                                                                                                                                                                                                                                                                 | -30°C,96H                                                                                                                                                                      |
| 3  | High temperature operation           | Endurance test applying the electric stress under high temperature for a long time                                                                                                                                                                                                                                                                  | 70°C,60H                                                                                                                                                                       |
| 4  | Low temperature operation            | Endurance test applying the electric stress under low temperature for a long time                                                                                                                                                                                                                                                                   | -20°C,60H                                                                                                                                                                      |
| 5  | High temperature /humidity storage   | Endurance test applying the high temperature and high humidity storage for a long time                                                                                                                                                                                                                                                              | 40°C, 90% R.H 96H                                                                                                                                                              |
| 6  | High temperature /humidity operation | Endurance test applying electric stress under high temperature and high humidity for a long time                                                                                                                                                                                                                                                    | 30°C 90% R.H 48H                                                                                                                                                               |
| 7  | Temperature Cycle                    | Endurance test applying the low and high temperature cycle<br>$  \begin{array}{ccccccc}  -20^{\circ}\text{C} & \rightarrow & 25^{\circ}\text{C} & \rightarrow & 70^{\circ}\text{C} & \rightarrow & 25^{\circ}\text{C} \\  30\text{min} & & 5\text{min} & & 30\text{min} & & 5\text{min} \\  \leftarrow \text{one cycle} \rightarrow  \end{array}  $ | -20°C/70°C 5 cycles                                                                                                                                                            |
| 8  | Vibration test                       | Endurance test applying the vibration during transportation and using                                                                                                                                                                                                                                                                               | Frequency:10Hz~55Hz~10Hz<br>Amplitude:1.5mm<br>X,Y,Z direction for total 3hours (parking condition)                                                                            |
| 9  | Static electricity test              | Endurance test applying static electric stress to terminal                                                                                                                                                                                                                                                                                          | Air discharge 10 times<br>R=330Ω, C=150pF. ±6KV<br><b>Remark:</b> if malfunction can be recovered to normal state after reset or power on, it will be judged to be a good part |

## 8.SPECIFICATION OF QUALITY ASSURANCE

### ● Summary

The customer should check and accept the products of YOURITECH within one month after reception. This standard for Quality Assurance should affirm the quality of LCD products to supply to purchaser by YOURITECH. Entire process is controlled according to ISO9001.

### ● Standard for quality test

#### 1、 Inspection

Before delivering, the supplier should take the following tests, and affirm the quality of product.

#### 2、 Electro-Optical Characteristics

According to the individual specification to test the product.

#### 3、 Test of Appearance Characteristics:

According to the individual specification to test the product.

#### 4、 Test of Reliability Characteristics

According to the definition of reliability on specification for test product.

#### 5、 Delivery Test

Before delivering, the supplier should take the delivery test

#### 6、 Sampling Method: GB/T2828.1-2003, Level II

#### 7、 The defects classify of AQL as following

Major defect: AQL=0.65

Minor defect: AQL=1

### ● Nonconforming Analysis & Deal With Manners

#### ✧ Nonconforming Analysis

1、 Purchaser should supply the detail data of nonconforming sample and the non-suitable state.

2、 After accepting the detail data from purchaser ,the analysis of nonconforming should be finished in two weeks.

3、 If supplier can not finish analysis on time ,must announce purchaser before two weeks.

#### ✧ Disposition of nonconforming

1、 If find any supplier defect during assembly line, supplier must change the good product for every defect after recognition.

2、 Both supplier and customer should analysis the reason and discuss the disposition of nonconforming when the reason of nonconforming is not sure.

### ● Agreement items.

Both sides should discuss together when the following problems happen:

1、 There is any problem of standard of quality assurance ,and both sides think that must be modifier.

2、 There is any argument item which does not record in the quality assurance.


3、 Any other special problem.

### ● Standard of the Product Appearance Test

#### ■ Manner of appearance test

1、 Appearance inspection: 100W cold white fluorescent lamp (light source is directly above the detection object), light intensity is  $1000 \pm 200$  LUX Electrical test: turn off the light test, the ambient illumination is  $200 \pm 50$  LUX ,and the distance of view must be at  $30 \pm 5$  cm.

- 2、 When test the model of Transmissive product must add the reflective plate.
- 3、 The test direction is base on about around 30 degree(within  $\theta$  range)of vertical line.

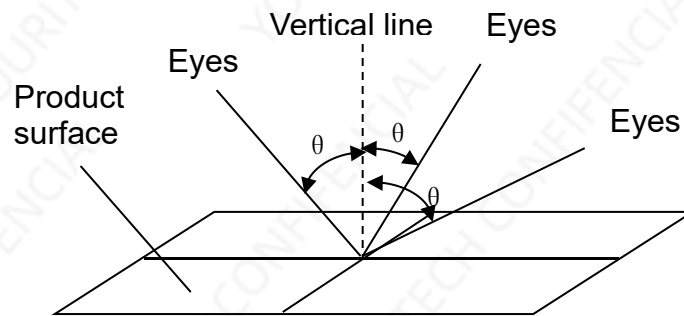


#### 4、 Definition of Area:

A Area: Active area

B Area: Viewing area

C Area: Out of viewing area



D Area: Seal area

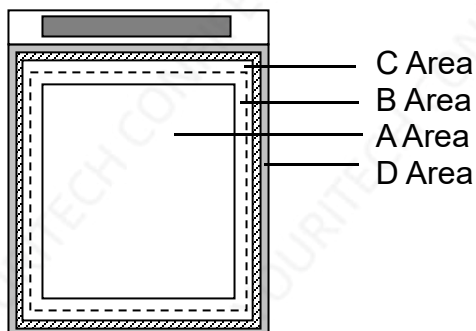

#### ■ Basic principle:

- 1、 It will accord to the AQL when the standard can not be described.
- 2、 The sample of the lowest acceptable quality level must be discussed by both supplier and customer when any dispute happened.
- 3、 Must add new item on time when it is necessary.

● **Inspection specification**

| NO                     | Item                                                                                      | Criterion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | AQL                                |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
|------------------------|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------|--|--------|-----|-----|--------------------|--------|--------|------------------------------------|------------------------|---|---|---------------|---|---|-------|---|---|--------|-------|----------------|--|--------|--|--|-----|-----|--|-----|---------------|--------|--------|--|--------------|---------------------|---|---|------------------------------------|--------------|---------------------|-----|-----------|---|---|--|-----|
| 01                     | Electrical Testing                                                                        | <p>1.1 Missing vertical, horizontal segment, segment contrast defect.</p> <p>1.2 Missing character, dot or icon.</p> <p>1.3 Display malfunction.</p> <p>1.4 No function or no display.</p> <p>1.5 Current consumption exceeds product specifications.</p> <p>1.6 LCD viewing angle defect.</p> <p>1.7 Contrast defect</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0.65                               |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
| 02                     | LCD black spots, white spots, color spots, contamination, scratches (display/non-display) | <p>2.1 Round type: As following drawing</p> <p><math>\varphi=(x+y)/2</math></p>  <table><tr><th rowspan="2">Size</th><th colspan="2">Acceptable QTY</th><th rowspan="2">Remark</th></tr><tr><th>A.A</th><th>V.A</th></tr><tr><td><math>\varphi \leq 0.1</math></td><td>Ignore</td><td>Ignore</td><td rowspan="4">No more than two spots within 20mm</td></tr><tr><td><math>0.1&lt;\varphi \leq 0.2</math></td><td>1</td><td>2</td></tr><tr><td><math>0.2&lt;\varphi</math></td><td>0</td><td>0</td></tr><tr><td>Total</td><td>1</td><td>2</td></tr></table> <p>2.2 Line Type: (As following drawing)</p>  <table><tr><th>Length</th><th>Width</th><th colspan="2">Acceptable QTY</th><th>Remark</th></tr><tr><th></th><th></th><th>A.A</th><th>V.A</th><th></th></tr><tr><td>---</td><td><math>W \leq 0.03</math></td><td>Ignore</td><td>Ignore</td><td></td></tr><tr><td><math>L \leq 2.0</math></td><td><math>0.03&lt; W \leq 0.05</math></td><td rowspan="2">1</td><td rowspan="2">2</td><td rowspan="2">No more than two lines within 20mm</td></tr><tr><td><math>L \leq 1.5</math></td><td><math>0.05&lt; W \leq 0.08</math></td></tr><tr><td>---</td><td><math>0.08&lt; W</math></td><td>0</td><td>0</td><td></td></tr></table> | Size                               | Acceptable QTY                     |  | Remark | A.A | V.A | $\varphi \leq 0.1$ | Ignore | Ignore | No more than two spots within 20mm | $0.1<\varphi \leq 0.2$ | 1 | 2 | $0.2<\varphi$ | 0 | 0 | Total | 1 | 2 | Length | Width | Acceptable QTY |  | Remark |  |  | A.A | V.A |  | --- | $W \leq 0.03$ | Ignore | Ignore |  | $L \leq 2.0$ | $0.03< W \leq 0.05$ | 1 | 2 | No more than two lines within 20mm | $L \leq 1.5$ | $0.05< W \leq 0.08$ | --- | $0.08< W$ | 0 | 0 |  | 1.0 |
| Size                   | Acceptable QTY                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                    | Remark                             |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
|                        | A.A                                                                                       | V.A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                    |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
| $\varphi \leq 0.1$     | Ignore                                                                                    | Ignore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | No more than two spots within 20mm |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
| $0.1<\varphi \leq 0.2$ | 1                                                                                         | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                    |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
| $0.2<\varphi$          | 0                                                                                         | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                    |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
| Total                  | 1                                                                                         | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                    |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
| Length                 | Width                                                                                     | Acceptable QTY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                    | Remark                             |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
|                        |                                                                                           | A.A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | V.A                                |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
| ---                    | $W \leq 0.03$                                                                             | Ignore                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Ignore                             |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
| $L \leq 2.0$           | $0.03< W \leq 0.05$                                                                       | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 2                                  | No more than two lines within 20mm |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
| $L \leq 1.5$           | $0.05< W \leq 0.08$                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                    |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |
| ---                    | $0.08< W$                                                                                 | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 0                                  |                                    |  |        |     |     |                    |        |        |                                    |                        |   |   |               |   |   |       |   |   |        |       |                |  |        |  |  |     |     |  |     |               |        |        |  |              |                     |   |   |                                    |              |                     |     |           |   |   |  |     |


| 03                         | Polarizer bubbles                                      | <p>If bubbles are visible, judge using black spot specifications, not easy to find, must check in specify direction.</p> <table><tr><th rowspan="2">Size</th><th colspan="2">Acceptable QTY</th></tr><tr><th>A.A</th><th>V.A</th></tr><tr><td><math>\varphi \leq 0.10</math></td><td>Ignore</td><td>Ignore</td></tr><tr><td><math>0.20 &lt; \varphi \leq 0.30</math></td><td>1</td><td>2</td></tr><tr><td><math>\varphi \geq 0.50</math></td><td>0</td><td>0</td></tr></table> | Size | Acceptable QTY |  | A.A | V.A | $\varphi \leq 0.10$ | Ignore | Ignore | $0.20 < \varphi \leq 0.30$ | 1 | 2 | $\varphi \geq 0.50$ | 0 | 0 | 1.0 |
|----------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------------|--|-----|-----|---------------------|--------|--------|----------------------------|---|---|---------------------|---|---|-----|
| Size                       | Acceptable QTY                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |      |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
|                            | A.A                                                    | V.A                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |      |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| $\varphi \leq 0.10$        | Ignore                                                 | Ignore                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |      |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| $0.20 < \varphi \leq 0.30$ | 1                                                      | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |      |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| $\varphi \geq 0.50$        | 0                                                      | 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |      |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| 04                         | Edge bubble                                            | <p>Loading: The display area is not allowed, the black border outside the display area is <math>1/2 \geq 0.5\text{mm}</math>, and bubble length <math>\leq 5\text{mm}</math> judged acceptable</p> <p>Film off: bubbles do not enter the display area, judge OK;</p> <p>Note: It is required that the bubble is not connected to the POL edge, so that it cannot enter the air</p>                                                                                             | 1.0  |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| 05                         | In-plane bubble                                        | Foreign body bubble or air bubble $d \leq 0.2\text{mm}$ , excluding;<br>$0.2\text{mm} < d \leq 0.5\text{mm}$ , $N \leq 2$ ; $d \geq 0.5\text{mm}$ , not allowed                                                                                                                                                                                                                                                                                                                | 1.0  |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| 06                         | Surface bump                                           | <p>The function screen is judged to be NG</p> <p>It has no effect on the display of the product, and the dot size range within 2mm diameter is qualified</p>                                                                                                                                                                                                                                                                                                                   | 1.0  |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| 07                         | Surface indentation                                    | <p>The function screen is judged to be NG</p> <p>It has no effect on the display of the product, the length is 15mm, and the width is 1mm</p> <p>ND5 overwrite invisible check OK, ND5 visible check NG</p>                                                                                                                                                                                                                                                                    | 1.0  |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| 08                         | The position of the polarizer is offset from the glass | Distance between the edge of the film and the edge of the display area $\geq 0.3\text{mm}$ , and not beyond the edge of the glass OK;                                                                                                                                                                                                                                                                                                                                          | 1.0  |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| 09                         | Electrical measurement<br>Turn white                   | Judge according to point and line defects                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1.0  |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| 10                         | Electrical test white                                  | Polarizer cutting Angle anomaly reference limit sample                                                                                                                                                                                                                                                                                                                                                                                                                         | 1.0  |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |
| 11                         | Poor protective film                                   | Damaged, rolled, obviously dirty reference sample                                                                                                                                                                                                                                                                                                                                                                                                                              | 1.0  |                |  |     |     |                     |        |        |                            |   |   |                     |   |   |     |

|    |                                                                                  |                                                                                                                                                                                                                                                                                                             |      |
|----|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| 12 | Easy to tear and stick poorly                                                    | 1. The attached position is inconsistent with the engineering drawing;<br>2. It is not easy to lift the protective film<br>Refer to the drawing; 2. Judge by the effect of lifting a corner.                                                                                                                | 1.0  |
| 13 | Chip edge<br>Polarizer edge white edge                                           | Loading requirements: $W < 0.5\text{mm}$ and no jagged or burr phenomenon<br>Film down requirements: do not enter the display area                                                                                                                                                                          | 1.0  |
| 14 | The polarizer is dirty                                                           | Non-removable dirt does not enter the visual area OK.                                                                                                                                                                                                                                                       | 1.0  |
| 15 | Misuse of materials                                                              | Color does not match, sand type does not match refer to the sample or BOM                                                                                                                                                                                                                                   | 1.0  |
| 16 | dysfunction                                                                      | No obvious difference painting is not allowed                                                                                                                                                                                                                                                               | 0.65 |
| 17 | Screen flash                                                                     | The full display screen appears regular flashing according to the limit template                                                                                                                                                                                                                            | 0.65 |
| 18 | Static picture                                                                   | Screen cannot be switched when driving is not allowed                                                                                                                                                                                                                                                       | 0.65 |
| 19 | Baby's Breath                                                                    | Broken white spots or poor color spots appear in the lighting state $d \leq 0.1\text{MM}$ , diameter 30MM range, $n \leq 15$                                                                                                                                                                                | 1.0  |
| 20 | Edge leakage<br>The edge of the LCD display area is not a display area           | Yellow light leaks between the edge display and the backlight, and is judged to be OK<br>White light is leaked between the edge display and the backlight, and the leakage area is less than 5mm. If the value is greater than 5mm, it indicates NG<br>Limit samples are available for special requirements | 1.0  |
| 21 | Uneven display                                                                   | Local position contrast appears deep/shallow inconsistent phenomenon is not allowed, in special cases, refer to limited sample<br>According to ND5,<br>ND5 overwrite invisible check OK, ND5 visible check NG                                                                                               | 0.65 |
| 22 | Light/strong                                                                     | The color of the screen is too dark or too shallow than normal according to the voltage deviation requirements of the specification or according to the limit template                                                                                                                                      | 0.65 |
| 23 | Water ripple                                                                     | Local ripple visible in gray scale or specific graphics.<br>Sample by limit                                                                                                                                                                                                                                 | 0.65 |
| 24 | Chromatic Aberration<br>Product itself display screen visible color is different | According to ND5,<br>ND5 overwrite invisible check OK, ND5 visible check NG                                                                                                                                                                                                                                 | 0.65 |

Symbols:  
a: Chip length    b: Chip width    c: Chip thickness  
t: Glass thickness

4.1 ITO electrode


$a \leq t$   
 $b \leq 0.5\text{mm}$   
 $c \leq 3.0\text{mm}$

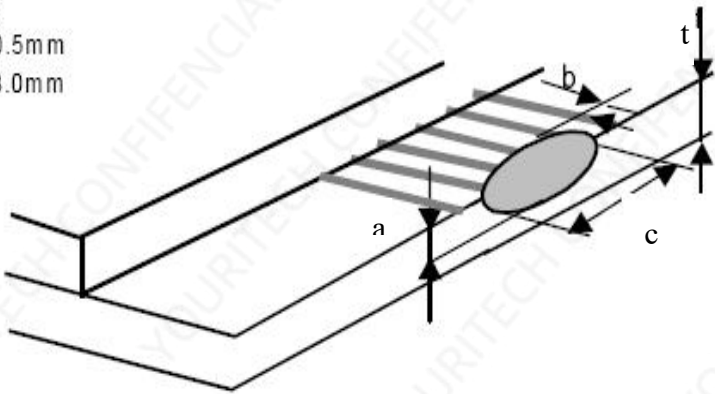


1.0

4.2 General ,corner portion

$a \leq t$   
 $b \leq 1.0\text{mm}$   
 $c \leq 5.0\text{mm}$

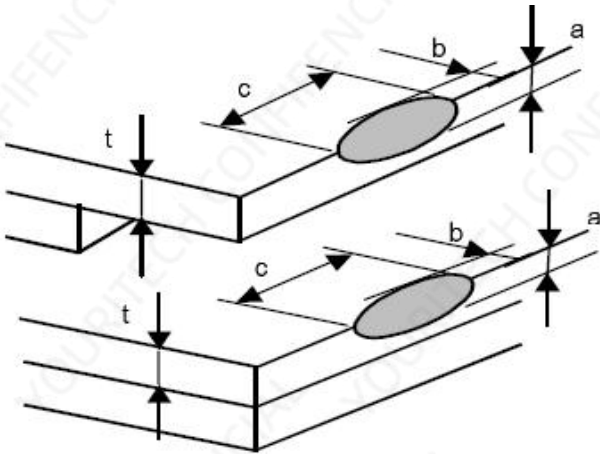

\*Effective width of seal area shall be more than 0.3mm.

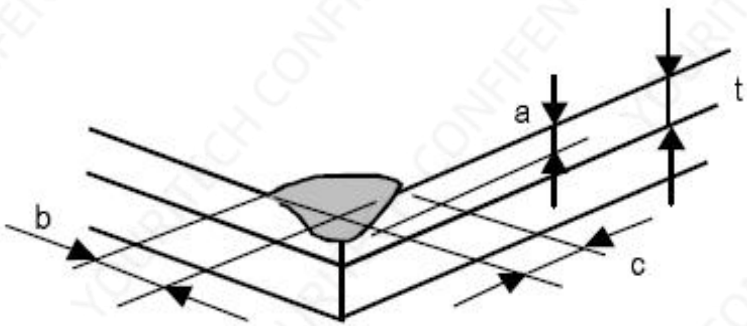

|    |                    |                                                                                                                       |      |
|----|--------------------|-----------------------------------------------------------------------------------------------------------------------|------|
| 26 | Cracked glass      | The LCD with extensive crack is not acceptable.                                                                       | 0.65 |
| 27 | Backlight elements | 6.1 Illumination source flickers when lit.                                                                            | 0.65 |
|    |                    | 6.2 Spots or scratches that appear when lit must be judged using LCD spot, lines and contamination standards.         | 1.0  |
|    |                    | 6.3 Backlight doesn't light or color is wrong                                                                         | 0.65 |
| 28 | Soldering          | 7.1 No unmelted solder paste may be present on the PCB.                                                               | 1.0  |
|    |                    | 7.2 No cold solder joints, missing solder connections, oxidation or icicle.                                           | 1.0  |
|    |                    | 7.3 No residue or solder balls on PCB.                                                                                | 1.0  |
|    |                    | 7.4 No short circuits in components on PCB.                                                                           | 0.65 |
| 29 | General appearance | 8.1 No oxidation, contamination, curves or, bends on interface pin (OLB) of TCP.                                      | 1.0  |
|    |                    | 8.2 No cracks on interface pin(OLB) of TCP                                                                            | 0.65 |
|    |                    | 8.3 NO contamination, solder residue or solder balls on product.                                                      | 1.0  |
|    |                    | 8.4 The IC on the TCP may not be damaged, circuits.                                                                   | 0.65 |
|    |                    | 8.5 The residual rosin or tin oil of soldering (component or chip component) is not burned into brown or black color. | 1.0  |
|    |                    | 8.6 Sealant on top of the ITO circuit has not hardened                                                                | 1.0  |
|    |                    | 8.7 Pin type must match type in specification sheet.                                                                  | 0.65 |
|    |                    | 8.8 LCD pin loose or missing pins.                                                                                    | 0.65 |
|    |                    | 8.9 Product packaging must the same as specified on packaging specification sheet.                                    | 0.65 |
|    |                    | 8.10 Product dimension and structure must conform to product specification sheet.                                     | 0.65 |

## 9.SUGGESTIONS FOR USING LCD MODULES

### ● Handling of LCM

- (1) LCD assembly should ensure that the surface and edge of the product are not pressed by the case.
- (2) LCD film FPC does not allow dead folding to prevent lines from breaking.
- (3) Assembly such as the display line has bending work, the display surface glass terminal position needs to be fixed display.
- (4) The LCD screen is made of glass. Don't give excessive external shock, or drop from a high place.
- (5) If the LCD screen is damaged and the liquid crystal leaks out, do not lick and swallow. When the liquid is attach to your hand, skin, cloth etc, wash it off by using soap and water thoroughly and immediately.
- (6) Don't apply excessive force on the surface of the LCM.
- (7) If the surface is contaminated ,clean it with soft cloth. If the LCM is severely contaminated , use Isopropyl alcohol/Ethyl alcohol to clean. Other solvents may damage the polarizer . The following solvents is especially prohibited: water , ketone Aromatic solvents etc.
- (8) Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- (9) Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
- (10) Don't disassemble the LCM.
- (11) To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
  - Be sure to ground the body when handling the LCD modules.
  - Tools required for assembling, such as soldering irons, must be properly grounded.
  - To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions.
  - The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.
- (12) Do not alter, modify or change the the shape of the tab on the metal frame.
- (13) Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.

(14) Do not damage or modify the pattern writing on the printed circuit board.

(15) Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector

(16) Except for soldering the interface, do not make any alterations or modifications with a soldering iron.

(17) Do not drop, bend or twist LCM.

- **Storage**

(1) If the product has not been used for more than 30 days, it must be stored by vacuuming.

Storage environment requirements: temperature 20-25 degrees, humidity 40-60% range of storage. Do not be exposed to sunlight or fluorescent lights.

(2) Storage in a clean environment, free from dust, active gas, and solvent.

(3) Store in antistatic container.

- **Limited Warranty**

Unless agreed between YOURITECH and customer, YOURITECH will replace or repair any of it's

LCD modules which are found to be functionally defective when inspected in accordance with YOURITECH LCD acceptance standards (copies available upon request) for a period of one year from

Date of shipment. Cosmetic/visual defects must be returned to YOURITECH within 90 days of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of YOURITECH limited to repair and/or replacement on the terms above. YOURITECH will not be responsible for any subsequent or consequential events


## **10. PACKING**

- **Packing Materials**

| NO. | ITEM   | Dimension(LXWXH) (mm) | Quantity |
|-----|--------|-----------------------|----------|
| 1   | Tray   | TBD                   | 20       |
| 2   | Carton | TBD                   | 200      |

## Packing Method

(1)

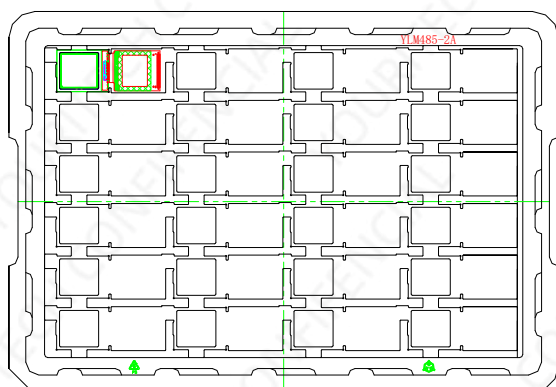

(2)


Use empty tray




Put products into the tray



(3)

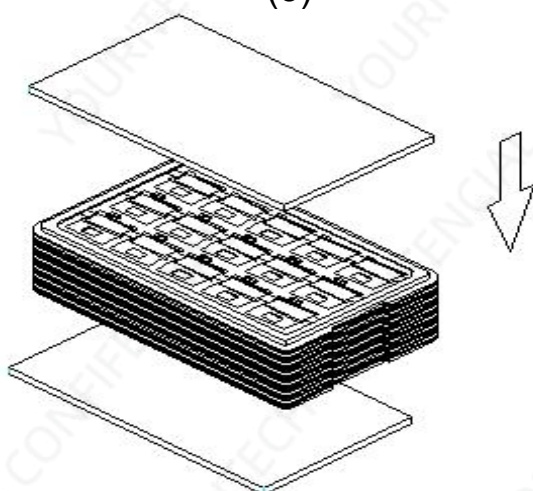


(4)

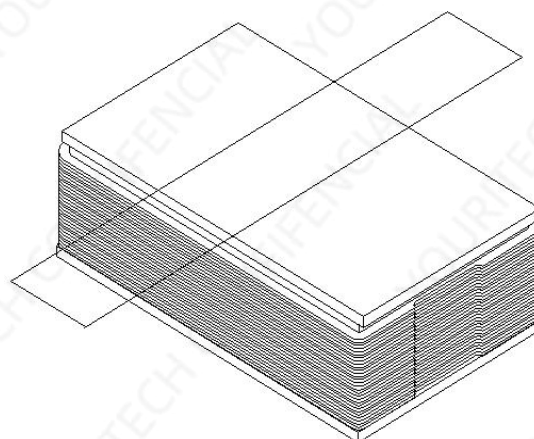

(5)



(6)

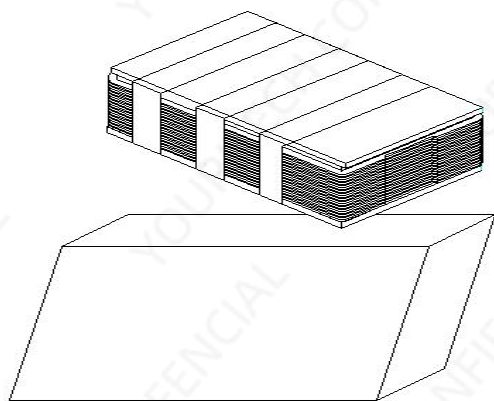

(7)



(8)

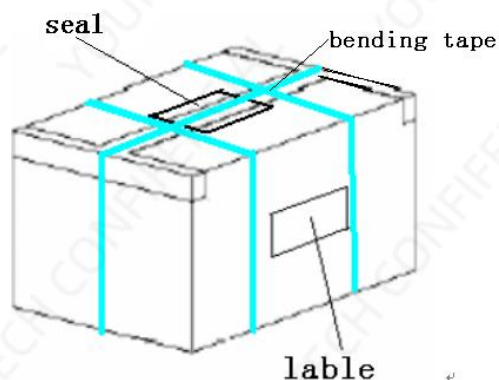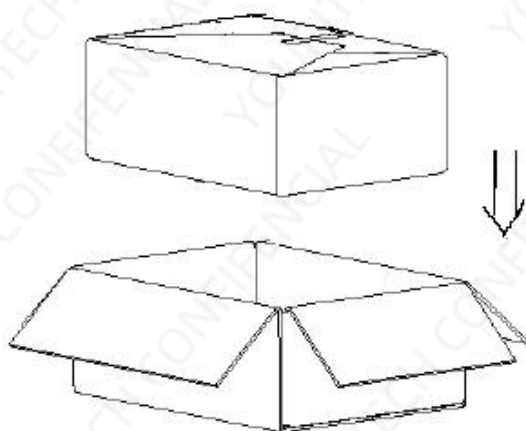

- (1). Put module into tray cavity :
- (2). Tray stacking
- (3). Put 1 cardboard under the tray stack and 1 cardboard above:
- (4). Fix the cardboard to the tray stack with adhesive tape:
- (5). Put the tray stack and 4 pcs desiccant into the LDPE bag
- (6). Fix the LDPE bag with adhesive tape:
- (7). Put LDPE bag with tray stack into carton.:
- (8). Carton sealing with adhesive tape.