

INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

Integration support

Obsolescence Management

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Cover glass

System solutions

OEM Solutions

Custom Display

Production Custom designs Installation

PCAP

Mechanical design

Optical Bonding



**Product
Datasheet**

Customer			
Keyword	DN series, HMI, 3.5 inch, 320*480, with configuration, LUA script,IPS		
Model	ET035HMI4848-DC(TCN),IPS		
Signature of Customer		Signature of Engineer	
Date		Date	2026.04.29



Version Record

Version	Date	Reason for modify	Page	Written by	Reviewed by
V1.1	2026/04/29	File creation	all		



Catalog

1. Introduction of Hardware.....	1
1.1 Product Appearance	1
1.2 Hardware configuration.....	2
1.3 Pin Definition	3
1.4 Debugging tool.....	4
2. Product Structure	6
3. Product Specification	7
4. Product Dimensions	9
5. Reliability Test	11
5.1 ESDTest.....	11
5.1.1 Executive Standard.....	11
5.1.2 Test Ambient	11
5.1.3 Test Data.....	12
5.2 High and Low Temperature Aging Test	13
5.2.1 Test environment.....	13
5.2.2 Test data.....	13
5.3 Group Pulse Test	13
5.3.1 Executive Standard.....	13
5.3.2 Test environment	14
5.3.3 Test Data.....	14
5.4 Radiation Test.....	14
5.4.1 Executive Standard.....	14
5.4.2 Test environment.....	14
5.4.3 Test Data.....	15
6. Protocol Configuration.....	20
6.1 HMI Simulator	21
6.2 Keil and virtual HMI binding debugging.....	21
7. Protocol Configuration.....	22
8. LUA Script Configuration.....	23
9. Disclaimer	25



1. Introduction of Hardware

This section describes some of the product's appearance reference diagrams, hardware configuration diagrams, pin definitions, and tools required for debugging.

1.1 Product Appearance

The following is a reference drawing of the appearance of different models of this size, as shown in Figure 1-1, Figure 1-2 and Figure 1-3.

Note: If there is no structural process modification, hardware reliability change or layout change, the company will not notify the customer; the standard is based on the product you received.



Figure1-1 3.5 inch capacitive touch reference diagram



Figure1-2 3.5 inch resistive touch reference diagram



Figure1-33.5 inch non-touch reference diagram

1.2 Hardware configuration

The following is a reference diagram of the hardware configuration of a product of this size, with a capacitive screen as an example, as shown in Figure 1-4.



Figure 1-4 Hardware configuration



1.3 Pin Definition

Number	Definition	Description	Reference Diagram
1	VCC	Power input5-26V	
2	VCC	Power input5-26V	
3	B	RS485 data B-side	
4	TX	Serial port screen output, connected to the user's RXD terminal	
5	RX	Serial port screen input, connected to the user's TXD terminal	
6	A	RS485 data A-side	
7	GND	Power Ground	
8	GND	Power Ground	



1.4 Debugging tool

The following is a reference diagram of the debugging tool for this product, illustrated by a resistive screen, as shown in Figure 1-5 and Figure 1-6.



Figure 1-5 RS232 debug diagram



Figure 1-6 RS485 debug diagram



◆RS232 development and debugging accessories (optional)

Name	Accessory Model
Power adapter	Power adapter 5V/12V is available
Debugging the interposer	HMI Dual Serial Debug Board (RS232/RS485)
Serial cable	Titir USB to RS232 serial cable
SD card	Capacity up to 32G (Kingston, SanDisk)

◆RS485 development and debugging accessories (optional)

Name	Accessory Model
Power adapter	Power adapter 5V/12V is available
Debugging the interposer	HMI Dual Serial Debug Board (RS232/RS485)
Serial cable	Titir USB to RS232 serial cable
SD card	Capacity up to 32G (Kingston, SanDisk)
Converter	RS485 converter



2. Product Structure

The HMI human-machine interface launched by YOURITECH TECHNOLOGY is a serial port display terminal integrating LCD display driver, picture font storage, GUI operation, audio playback and various configuration controls. The user microcontroller only needs to send and receive the corresponding serial port instructions to easily realize text, picture and curve display.

The DN series serial screen processor adopts a 32-bit 400M SOC processor, which integrates PSRAM video memory, JPEG, PNG image hardware decoding and other functions, and the system architecture is shown in Figure 2-1.

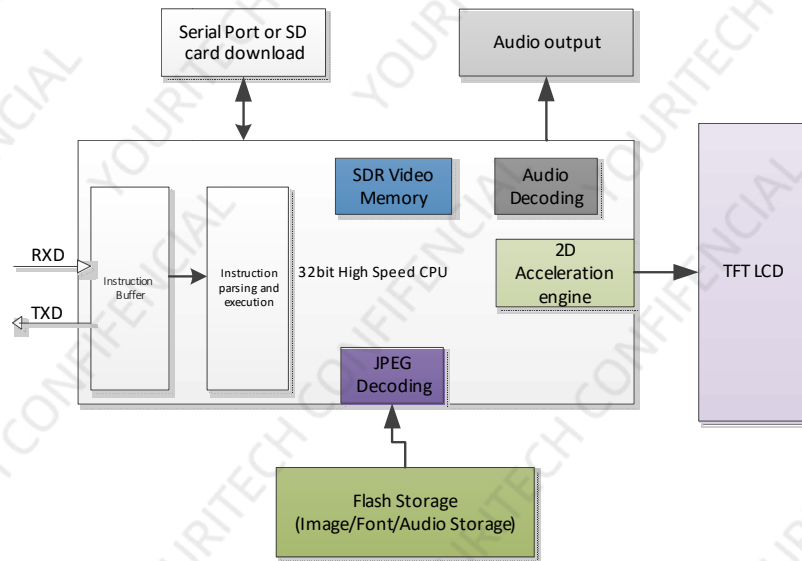


Figure 2-1 Internal structure of DN series serial port screen

The main advantages of choosing a high-performance 32-bit dual-core processor structure are:

1. Dedicated 32-bit 400M SOC processor optimized for picture display, with 2D acceleration engine, JPEG picture hardware decoding, so that the display can cooperate with various special effects, and the display effect is smooth and gorgeous.
2. No operating system, 24 * 365h hours of continuous power can work reliably, no garbage redundant files.



3. Product Specification

◆Product Specification	
Model Description	ET035HMI4848-DCT,IPS (RS232/TTL、RS485、Resistive screen) ET035HMI4848-DCC,IPS (RS232/TTL、RS485、Capacitive touch) ET035HMI4848-DCN,IPS (RS232/TTL、RS485、No touch)
Product Series	DN series
Core Processor	400M SOCprocessor
Operating System	No operating system, it can run when it is powered on, and the startup time is about 1 second
Protocol Type	SupportingMODBUS RTU、FX2N、FX3U、DELTA(DVP)、XINJIE(XC)、XINJIE(XD)、FATEK(FB)、HAIWELL(N/S)、SAMKOON、EMERSON、DCBUS、XGUSetc. Protocol
Script language	Version 5.3 LUA scripts with user-written logic, protocols and algorithm functions running inside the screen
Size	3.5inch
Resolution	320*480
Installation Orientation	It supports 0°, 90°, 180°and 270°rotation mounted displays
Storage Space	128Mbit
Font	Built-in vector font, edge anti-aliasing, support any size ASCII, GBK, GB2312, UNICODE (global language) font library, can also customize any computer font display
Image Storage	It supports JPEG and PNG (transflective/fully transparent) compression, and supports image storage of any size. Accumulation can be stored approximately370 full-screen images (calculated based on size 40KB/image, BMP format is not recommended). The image compression ratio is different,this value fluctuates up and down
Color	65K color, 16-bit RGB
Voltage	5-26V
Power Consumption	Darkest backlight: 0.4W
	Brightest backlight: 0.9W
Communicate Interface	RS232/TTL (factory default level 232, short-circuit J5 is TTL level), RS485
Communicate Baud-rate	RS232/TTL:1200~921600bps, typical baud rate: 115200bps RS485:1200~115200bps, typical baud rate: 19200bps
Communication Connector Specifications	The default is HY2.0-8P, and FPC1.0-10P is optional
Image Download	SD card, serial port
Firmware local/remote upgrade	Insert SD card/U disk local upgrade/support remote serial port of user motherboard to upgrade screen firmware
Picture remote upgrade	Support users to remotely use their motherboard serial port to upgrade screen-related picture projects, font libraries, configuration files, etc



Real-time clock (RTC)	Support clock, timer, countdown and other functions
Screen Active Display Area (AA)	73.5mm*49.0mm
Product Size (L*W*H)	103.8mm*60.9mm*11.8mm
Supporting Host Computer Software	VisualHMI®

◆Reliability Parameters	
Operating temperature	-20~+70°C
Storage temperature	-30~+80°C
ESD Test	Test Standards: IEC 61000-4-2 Contact: $\pm 6KV$; Air: $\pm 10KV$
EFT Test	Test standard: IEC 61000-4-4 GB standard 4 (voltage: $\pm 4KV$; FREQUENCY: 100/5KHZ; TIME: 120S), no restart, no abnormal display, no abnormal touch, etc., the test function is normal
Radiation Test	Test standard: EN55022 ClassB margin - 6dB Test environment: three-meter dark wave chamber

◆ Product Core Competitiveness	
Learning Cycle	30 minutes to familiarize yourself with the development environment, 3 days to complete the HMI design
Program debugging	The host computer integrates an "HMI simulator", which does not need to be connected to hardware, and is directly bound to Keil IDE for debugging
Configure the controls	In addition to the traditional buttons, text, progress bars, QR codes and other controls, a variety of new configuration controls have been added, such as: multi-status indicators, recipes, operation records, flow blocks, alarm bars and other configuration controls
System keyboard	Built-in virtual number, character keyboard, support Chinese and English input methods, can customize the keyboard
Data logging	Supports exporting data logging control content to SD card
Layer technology	The system has multiple built-in display layers for faster switching
Multi-language capabilities	Factory preset up to 30 global languages of any country, one-click switch of the required language, without the need for multiple sets of UI
Logical operation processing	The LUA script parser is embedded in the host computer, and users can customize various complex logical relationships and protocols on the screen, meeting 99.9% of the product function requirements of customers
Remote upgrades	Support remote serial port upgrade screen firmware, engineering files, specified pictures, configuration files and fonts, etc
Life cycle	It uses traditional big brand processors and has been in continuous supply for many years

◆LCD	
Display Type	IPS LCD screen
Backlight Tube	LED




Brightness (cd/m ²)	300
Backlight Life (h)	>20,000
Contrast Ratio	700:1
Visual Angle (L/R/T/B)	85/85/85/85

◆Touch Panel (Resistive and capacitive touch options are available)	
Touch type	Capacitive touch screen (IC:GT911)
Capacitive screen touch mode	Single-point, swipe touch
Capacitive screen light transmittance	More than 90%
The number of capacitive screen touches	The number of capacitive screen touches is theoretically unlimited, and the touch life is related to the working environment (dust, humidity).
Capacitor cover is customized	The "glass cover + capacitive touch" integrated lamination service can be customized according to the user's drawing size
Touch type	Resistive touch screen
Resistive screen touch mode	Single-point, swipe touch
Resistive screen light transmittance	More than 80%
Resistive screen touch life	The same pixel, the number of single points is more than 1 million times

◆Customization Service	
Customization Fee	One-time order 1000PCS can partial exempt customized fee
Hardware Circuit	Can customize PCB size, circuit thickness, add user circuit, military-grade temperature display, etc.
Software Customization	Customize special instructions or controls according to user needs to reduce user development difficulty
UI design Service	Can provide picture art and product structure design services
Others	Customized on demand to meet all user needs

4. Product Dimensions



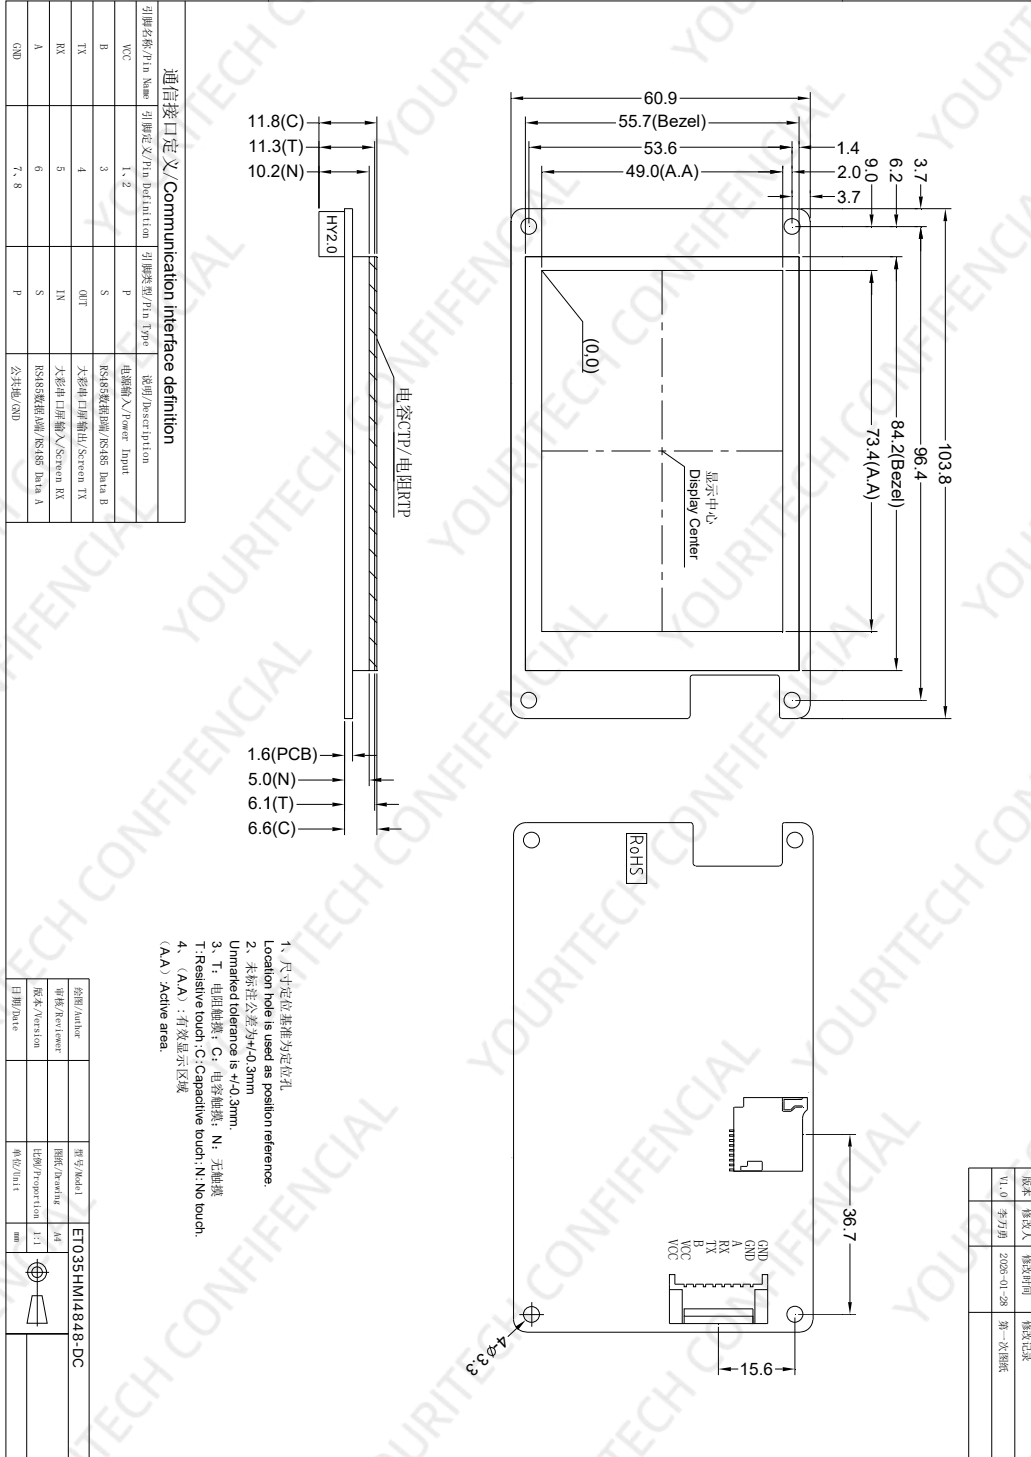

5. Reliability Test

All serial port screens of YOURITECH TECHNOLOGY have carried out a series of process reliability tests before mass production: high and low temperature, ESD, pulse burst, radiation, touch life and other tests to ensure product quality, as shown in Figure 5-1.



Figure 5-1 Reliability Test Equipment

5.1 ESDTest

5.1.1 Executive Standard

Executive Standard	IEC 61000-4-2
--------------------	---------------

5.1.2 Test Ambient

Test ambient temperature:25℃

Test ambient humidity:50%

Test process: Place the product on the test stand, lay down on the serial port screen buckle and the display area in order to make contact and air discharge as shown in 错误! 未找到引用源。 . Observe whether if the screen have reset or restarted,or abnormal display.





Figure 5-1 ESD Test

5.1.3 Test Data

Product Model	Discharge type	Humidity	Test result
ET035HMI4848-DCT ,IPS	Contact	±6KV	No restart, no abnormal display, normal function
	Contact	±7KV	Occasional reset and restart, no abnormal display, normal function
	Air	±15KV	No restart, no abnormal display, normal function
	Air	±18KV	Occasional reset and restart, no abnormal display, normal function
ET035HMI4848-DCC ,IPS	Contact	±6KV	No restart, no abnormal display, normal function
	Contact	±8KV	Occasional reset and restart, no abnormal display, normal function
	Air	±11KV	No restart, no abnormal display, normal function
	Air	±12KV	Occasional reset and restart, no abnormal display, normal function
HET035HMI4848-DCN ,IPS	Contact	±6KV	No restart, no abnormal display, normal function
	Contact	±7KV	Occasional reset and restart, no abnormal display, normal function
	Air	±10KV	No restart, no abnormal display, normal function
	Air	±11KV	Occasional reset and restart, no abnormal display, normal function
Note: The current test test is the product exposed test, the actual product assembly machine, keep the screen and the machine well grounded, or the surface of the touch board is protected by PVC or cover, the ESD			



performance index of the whole machine will be higher

5.2 High and Low Temperature Aging Test

5.2.1 Test environment

Test ambient temperature: $-20\sim+70^{\circ}\text{C}$

Test ambient humidity: $60\%\pm 3\%\text{RH}$

Test process: the product is placed obliquely in the high and low temperature test box as shown in Figure 5-3, through the 72H high temperature, low temperature, high and low temperature alternating transformation aging test, observe whether the screen during the test and after the experimental test whether the screen has reset and restart, display abnormality, abnormal function and other phenomena.



Figure5-2 High and low temperature aging test

5.2.2 Test data

Product Model	Temperature	Humidity	Test results
ET035HMI4848-DCT ,IPS ET035HMI4848-DCC ,IPS ET035HMI4848-DCN ,IPS	High temperature (70°C)	65%	No restart, no abnormal display, normal function
	Lowtemperature(-20°C)	65%	No restart, no abnormal display, normal function
	Alternating high and low temperature ($-20\sim 70^{\circ}\text{C}$)	65%	No restart, no abnormal display, normal function

5.3 Group Pulse Test

5.3.1 Executive Standard

Executive Standard

IEC 61000-4-4



5.3.2 Test environment

Test ambient temperature: 25°C

Test ambient humidity: 50%

Test process: the product is placed flat on the test bench, and the power supply after coupling the pulse group generator is used to power the screen, as shown in Figure 5-4, and observe whether the screen is reset and restarted, display abnormal, touch abnormality and other phenomena during the experiment.



Figure 5-4 group pulse test diagram

5.3.3 Test Data

Product Model	Test Standard			Test Result
ET035HMI4848-DCT ,IPS ET035HMI4848-DCC ,IPS ET035HMI4848-DCN ,IPS	International Standard 4			No restart, normal communication, normal function
	Voltage (KV)	Frequency (KHZ)	Time (S)	
	±4.0	5	120	

5.4 Radiation Test

5.4.1 Executive Standard

Executive Standard	EN55022 ClassB
--------------------	----------------

5.4.2 Test environment

The radiation test laboratory environment is shown in 错误！未找到引用源。。





Figure 5-5 Radiation test chart

5.4.3 Test Data

1. Radiation test data in the horizontal direction, as shown in Figure 5-6.



Figure5-6 Horizontal direction of radiation measurement

2. Radiation test data in the vertical direction, as shown in Figure 5-7.





Figure5-7 Vertical direction of radiation test



6. Protocol Configuration

VisualHMI is a configuration development platform independently developed by YOURITECH TECHNOLOGY for human-machine interface applications, which integrates the "HMI simulator" and is free to use for life. After the user creates a new project, imports the designed art pictures, and then configures the buttons and other controls in each screen, and finally downloads the entire project to the serial port screen after the simulation is correct. The software interface is shown in Figure

6-1.



Figure 6-1 VisualHMI main interface

Any user only needs 3 steps to complete complex human-computer interaction design within 30 minutes.

1. Prepare art design materials

Arrange UI designers to design the images required for products such as start-up image, text background, button icon and prompt box.

2. Conduct image editing, scripting, control configuration and image downloading with VisualHM software

First of all, using the supporting host computer VisualHM software, then typeset interface and configure controls of the pre-designed artwork pictures, run the "virtual serial port screen" for simulation, and finally the entire project can be completed download through SD / UART (depending on the hardware configuration of different models) to the internal memory of the serial port screen. The PC software will assign a unique ID number to each screen, picture and control in the project. Users can also write the required logic control and algorithms through the script editor embedded in the host computer to reduce the communication frequency between the screen and the motherboard.

3. User microcontroller and HMI communication

After the project is downloaded to the HMI, the single-chip microcomputer and the HMI establish a communication connection with the HMI through serial ports and other means, and communicate and interact according to the established communication protocol.

6.1 HMI Simulator

"HMI Simulator" is an HMI simulation software developed by YOURITECH TECHNOLOGY. After the user installs the VisualHMI



software of the host computer, it can be run and used. The "HMI Simulator" simulation results are exactly the same as the real HMI. Therefore, there is no need to purchase hardware during the early evaluation of R&D, and it can communicate with each other through its own single-chip microcomputer serial port, and the button control information will be uploaded immediately when the mouse clicks the button, as shown in Figure 6-2. Once the developer has debugged, the real hardware does not need to be debugged.



Figure 6-2 The serial port of the user's single-chip microcomputer is debugged online with the "HMI simulator"

6.2 Keil and virtual HMI binding debugging

In order to further improve development efficiency, users can also bind Debug to the "virtual HMI" through the Keil development environment. When the program is single-step debugging, all running results can be presented on the "virtual HMI", which greatly saves the engineer's development time, as shown in Figure 6-3. Once the engineering interface is changed, the user no longer needs to re-download the image to the HMI, and all pre-project evaluation can be done on the PC.

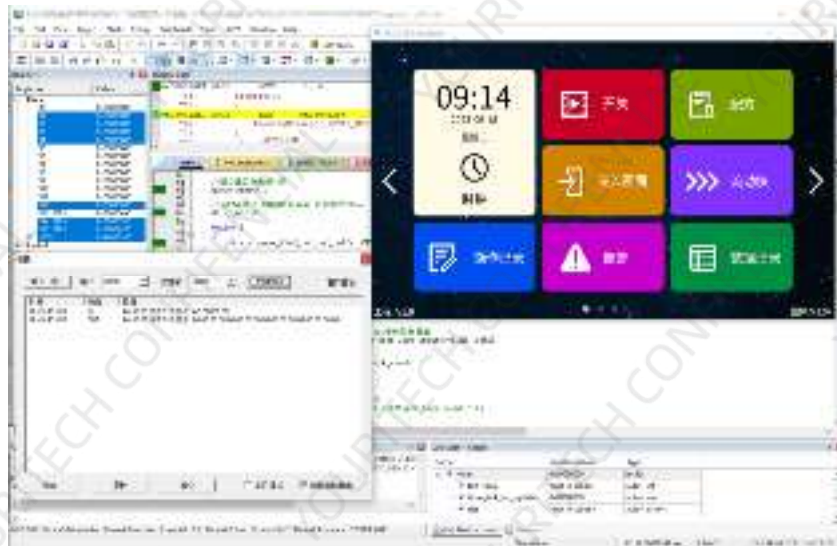


Figure 6-3: The Keil development environment is bound to debug with the virtual HMI

Note: The debugging of virtual HMI needs keil software support, in the debug process, enter dirvtreg in the command serial port, you need to list SxIN (according to the microcomputer, x may represent 0, 1, 2), if there is a list of means that keil has virtualized the serial port of the single-chip microcomputer to the register, so that it can be used.



7. Protocol Configuration

Users can configure and run DCBUS, MODBUS RTU, FX2N, FX3U and other protocols through the host computer.

Open the VisualHMI host computer software, click [Project Settings] → [Communication Protocol] in the menu bar to enter the protocol configuration interface, and users can choose to enable the corresponding protocol according to their own needs, as shown in Figure 7-1.

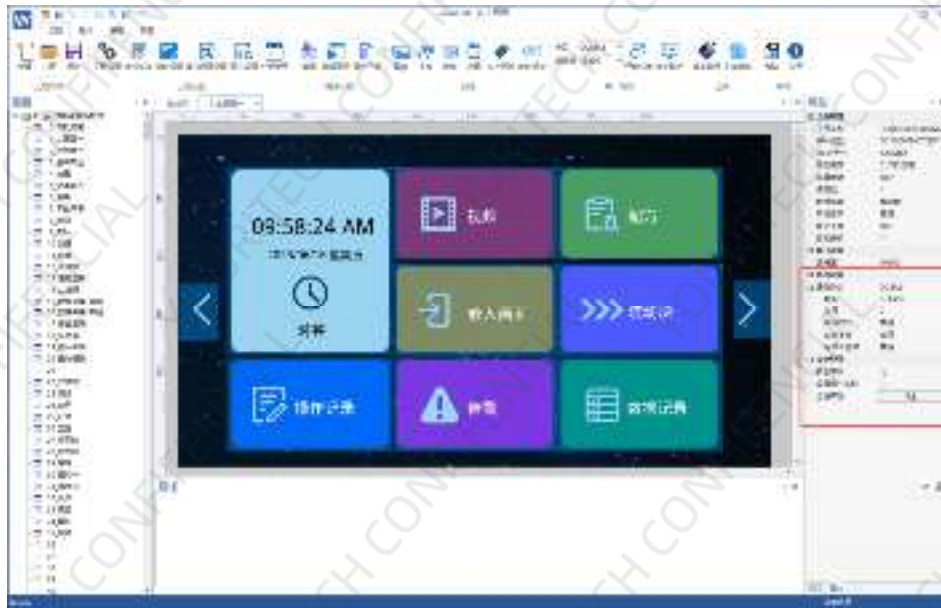


Figure 7-1 Protocol configuration



8. LUA Script Configuration

The HMI series launched by YOURITECH TECHNOLOGY.all support LUA language scripts. HMI provides a wealth of LUA script APIs and callback interfaces, users can directly set and obtain the running status of all configuration controls by calling the API interface, combined with the written logic processing, the screen can complete the predetermined action without the participation of the external MCU, reducing the data communication between the MCU and the screen.

LUA is a lightweight scripting language with simpler syntax and logic than C, so developers can get started directly. The LUA language comes with a complete mathematical function library, string processing, JSON and other libraries, which have function support for common mathematical operations, such as open square, sine and cosine, absolute value, etc.; Due to the high frequency of the screen itself, all complex algorithms are processed by the screen, which greatly reduces the execution overhead of the user's MCU.

You can click [Project] → [LUA Programming] in the menu bar to open the LUA script of the project in the VisualHMI software, as shown in Figure 8-1, and enter the LUA script writing interface as shown in Figure 8-2



Figure 8-1 LUA Script Programming





Figure 8-2 LUA Script Programming



9. Disclaimer

This document provides information about the products of YOURITECH TECHNOLOGY, aiming to assist customers to accelerate the research and development progress of products, and any routine procedures, technical documents, CAD drawings and other materials and information provided in the service process or other channels are for reference only, and customers have the right not to use or modify by themselves. The company does not provide any guarantee of completeness, reliability, etc., and the company does not assume any responsibility for special, incidental or indirect losses caused by any reason during the customer's use. YOURITECH TECHNOLOGY products cannot be used as the only control equipment in military, medical, lifesaving or life support purposes.

This document does not grant any license to any intellectual property rights, and no license to any intellectual property rights, express or implied, or by prohibition of speaking or otherwise. Except for the responsibilities stated in the terms and conditions of sale of its products, YOURITECH TECHNOLOGY does not assume any other responsibilities. Moreover, YOURITECH TECHNOLOGY does not make any express or implied guarantee for the sale and/or use of YOURITECH TECHNOLOGY products, including the fitness for a particular purpose of the product, merchant-ability or infringement liability for any patent, copyright or other intellectual property rights. YOURITECH TECHNOLOGY may make changes to product specifications and product descriptions at any time without prior notice.

