

INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Production Custom designs Installation

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Optical Bonding

Cover glass

System solutions

OEM Solutions

Custom Display

Mechanical design



Project No. 项目编号	ET040HV01-T
Customer 客户名称	
Module No. 客户型号	
Product type 产品内容	Standard LCD Module TFT: 320*RGBx320Dots 3.92" TFT LCD

客户确认Customer Approval

项目负责人Project Manager	
品质主管Director of Quality	
采购工程师Purchasing Engineer	

PREPARED BY	CHECKED BY	APPROVED BY



1.1 Scope of application

LCD specification: Dots 320xRGBx320

As to basic specification of the driver IC, refer to the IC (ST7365P) specification and data book.

All material & processing of the LCD module should be Lead Free.

1.2 TFT features:

Structure: TFT PANNEL+IC +FPC+BL +CTP;

ALL O'CLOCK Type LCD

320 dot-segment and 320 dot-common outputs;

262K Color can be selected by software;

White LED back light;

SPI or MCU interface


1.3 Applications:



2. LCM General specification

ITEM	Standard value	Unit
LCD Type	Normally Black	--
Drive element	TFT active matrix	--
Number of pixels	320*3RGB(H)X320(V)	Dots
Pixel arrangement	RGB stripe	--
Pixel Pitch (W*H)	0.2223(H) x 0.2182(V)	mm
Active area	71.14(H) x 69.82(V)	mm
Viewing direction	ALL O'CLOCK	--
TFT Driver IC	ST7365P	--
TFT interface	SPI or MCU Interface	--
LCM Size(W*H*T)	74.86(W) ×76.73(H) ×2.13(T)	mm
Approx. Weight	TBD	g
Touch structure	--	--
Touch Driver IC	--	--
Touch Interface	--	--



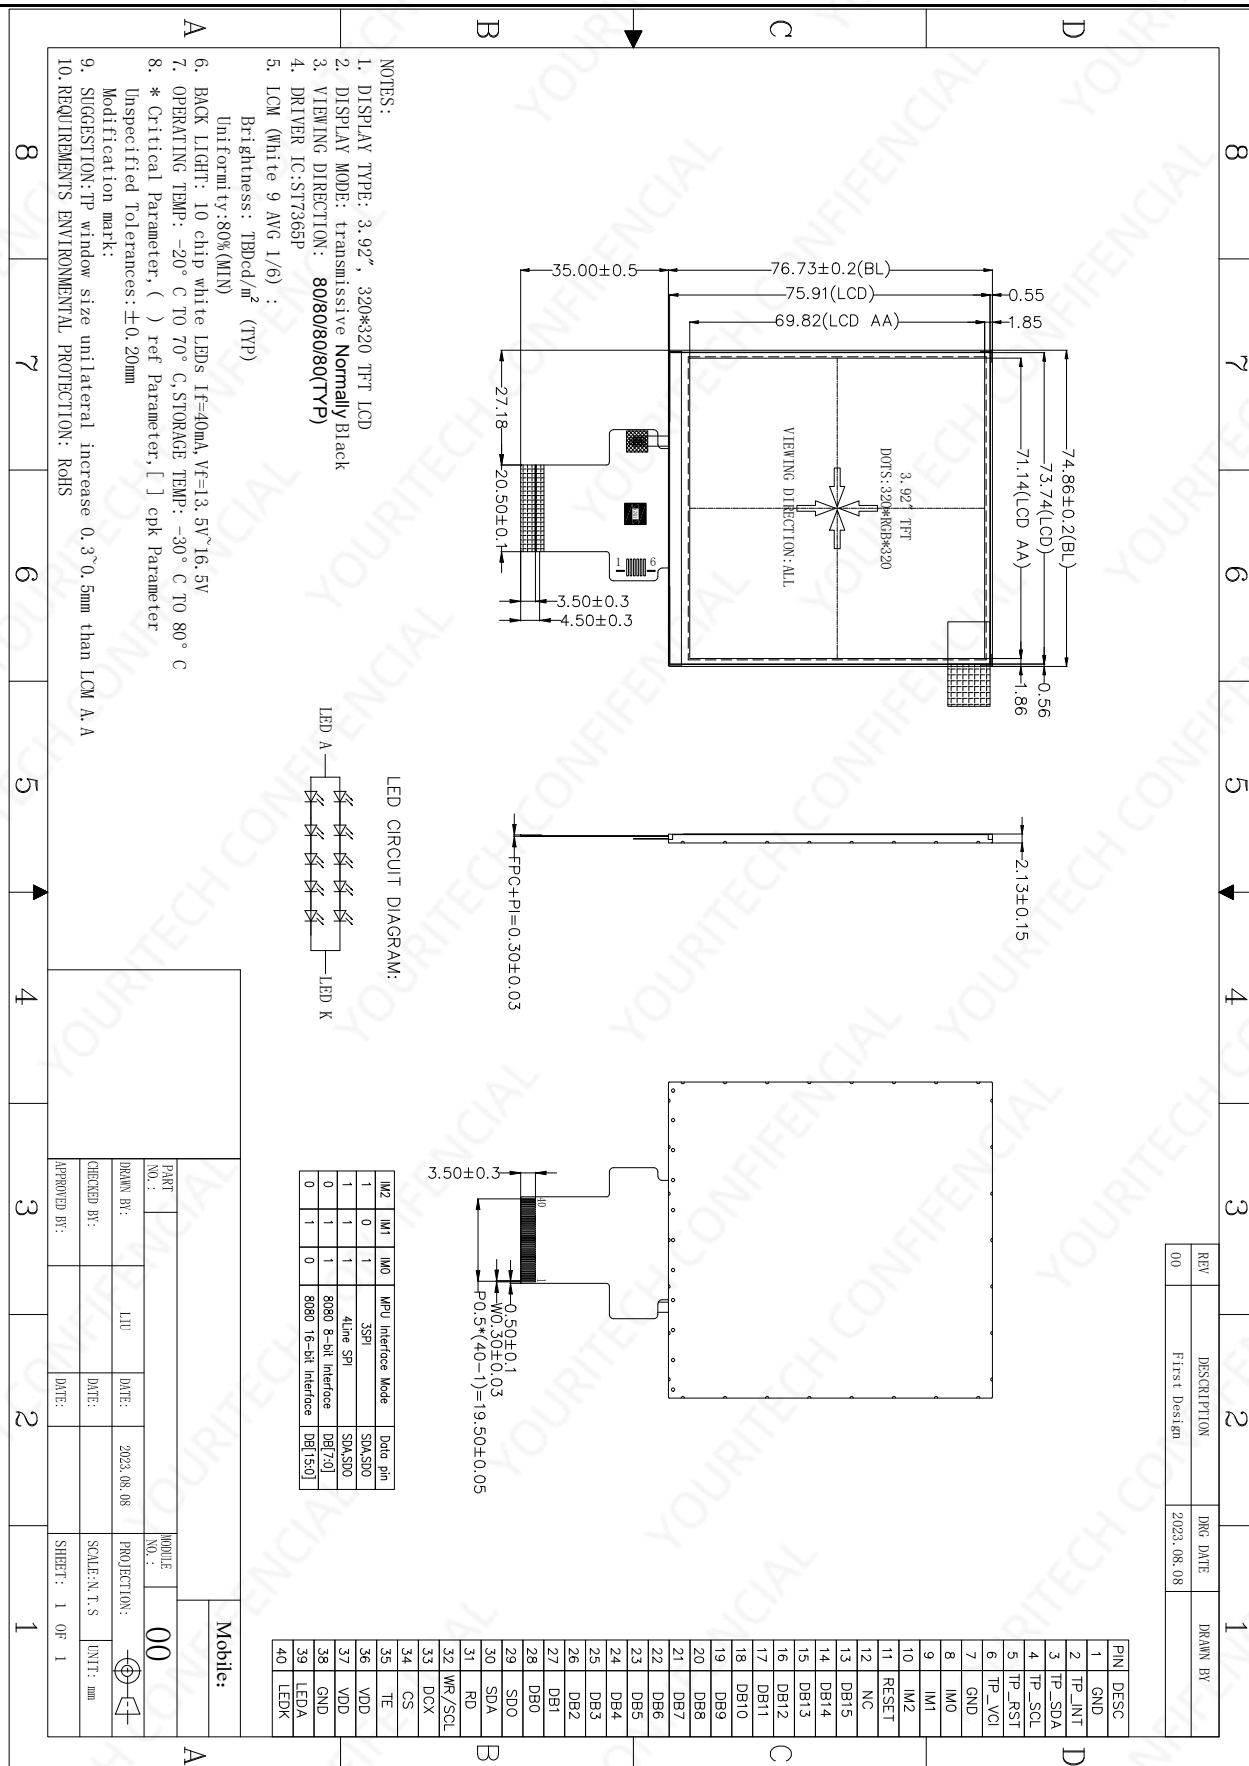

3. Absolute Maximum Rating

Characteristics	Symbol	Min.	Max.	Unit
LCM Operating Temperature	T _{OPR}	-20	+70	°C
LCM Storage Temperature	T _{STG}	-30	+80	°C
Humidity	RH	--	90	%

4. Electrical Characteristics

4.1 TFT DC Characteristics

Characteristics	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage for I/O	VDDIO	--	--	--	V
Supply Voltage for(DC/DC)	VDD	2.5	2.8	3.3	V


4.2 Back-Light Unit Characteristics

The back-light system is an edge-lighting type with 10 white LEDs. The characteristics of the back-light are shown in the following tables.

Characteristics	Symbol	Min.	Type	Max.	Unit	Notes
Forward Voltage	V _F	13.5	--	16.5	V	--
Forward current	I _F	--	40	--	mA	--
Luminance(With LCD)	L _v	--	TBD	--	cd/m ²	--
LED life time	N/A	--	30,000	--	Hr	Note 1

Note:

- (1) The “LED life time” is defined as the module brightness decrease to 50% of original brightness at I_L=20mA/LED. The LED life time could be decreased if operating I_L is larger than 25mA/LED. Backlight circuit diagram shown in below:

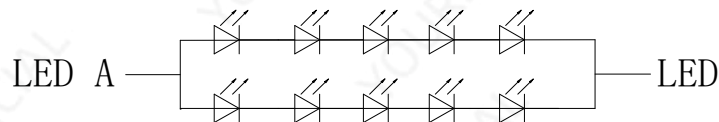

5. Module Function Description

Pin No.	Symbol	Functional					Notes
1	GND	Power Ground					
2	CTP_INT	Interrupt signal					
3	CTP_SDA	Touch panel I2C data					
4	CTP_SCL	Touch panel I2C clock					
5	CTP_RST	Touch panel reset					
6	CTP_VCI	Touch panel Power supply 2.8~3.3V					
7	GND	Power Ground					
8-10	IM0-IM2						
		IM2	IM1	IM0	MPU Interface Mode	Data pin	
		1	0	1	3SPI	SDA,SDO	
		1	1	1	4Line SPI	SDA,SDO	
		0	1	1	8080 8-bit Interface	DB[7:0]	
0	1	0	8080 16-bit Interface	DB[15:0]			
11	RESET	Reset signal input terminal. Active at ‘L’ .					
12	NC	No Connection.					
13	DB15	MCU parallel interface data bus.					
14	DB14	MCU parallel interface data bus.					
15	DB13	MCU parallel interface data bus.					
16	DB12	MCU parallel interface data bus.					
17	DB11	MCU parallel interface data bus.					
18	DB10	MCU parallel interface data bus.					
19	DB9	MCU parallel interface data bus.					
20	DB8	MCU parallel interface data bus.					
21	DB7	MCU parallel interface data bus.					
22	DB6	MCU parallel interface data bus.					
23	DB5	MCU parallel interface data bus.					
24	DB4	MCU parallel interface data bus.					
25	DB3	MCU parallel interface data bus.					
26	DB2	MCU parallel interface data bus.					



27	DB1	MCU parallel interface data bus.	
28	DB0	MCU parallel interface data bus.	
29	SDO	Serial data output pin.	
30	SDA	Serial data input/output pin.	
31	RD	Read data at the rising edge.	
32	WR/SCL	Write strobe signal	
33	DCX	Register select signal.	
34	CS	Chip select signal input pin	
35	TE	Frame head pulse for tearing effect.	
36	VDD	Power Supply For LCD.	
37	VDD	Power Supply For LCD.	
38	GND	Power Ground	
39	LEDA	Power supply for backlight anode input terminal.	
40	LEDK	Power supply for backlight cathode input terminal.	



6. Timing Characteristics

Power ON/OFF Sequence

VDDI and VDD can be applied in any order.

VDD and VDDI can be power down in any order.

During power off, if LCD is in the Sleep Out mode, VDD and VDDI must be powered down minimum 120msec after RESX has been released.

During power off, if LCD is in the Sleep In mode, VDDI or VDD can be powered down minimum 0msec after RESX has been released.

CSX can be applied at any timing or can be permanently grounded. RESX has priority over CSX.


Note 1: There will be no damage to the display module if the power sequences are not met.

Note 2: There will be no abnormal visible effects on the display panel during the Power On/Off Sequences.


Note 3: There will be no abnormal visible effects on the display between end of Power On Sequence and before receiving Sleep Out command. Also between receiving Sleep In command and Power Off Sequence.

Note 4: If RESX line is not held stable by host during Power On Sequence as defined in the sequence below, then it will be necessary to apply a Hardware Reset (RESX) after Host Power On Sequence is complete to ensure correct operation. Otherwise function is not guaranteed.

The power on/off sequence is illustrated below

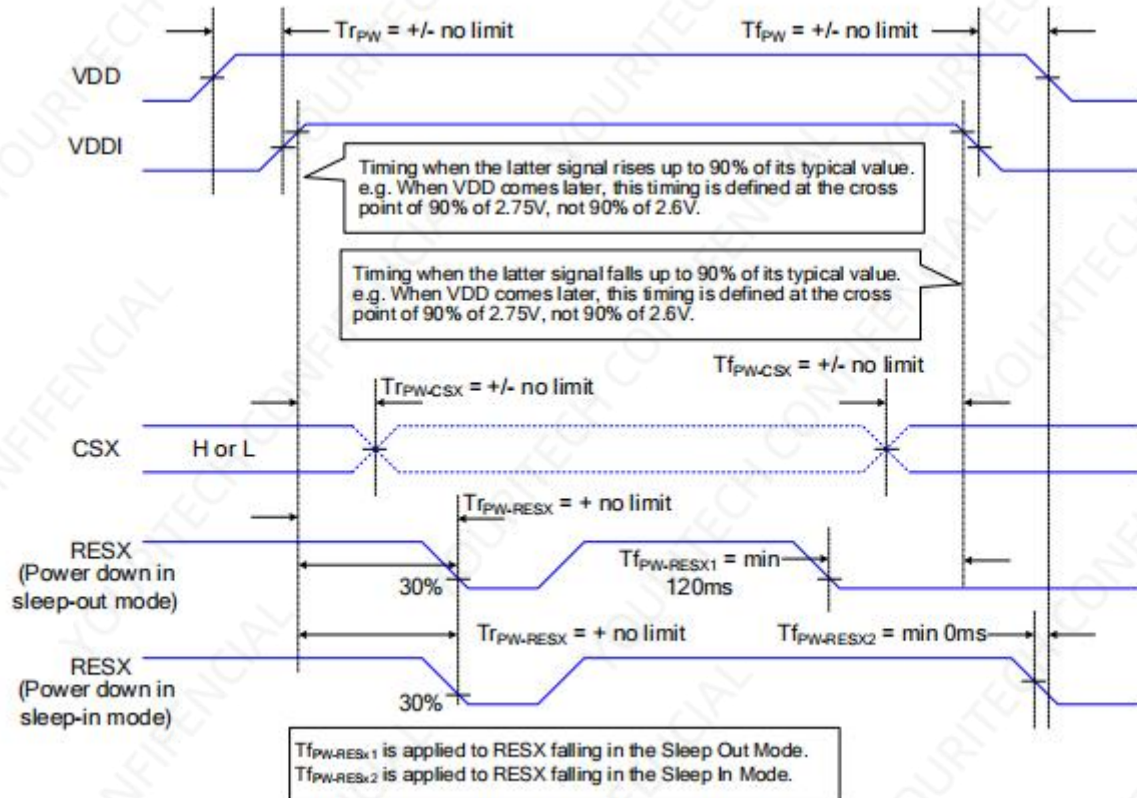

8080 Series MCU Parallel Interface Characteristics: 18/16/9/8-bit Bus

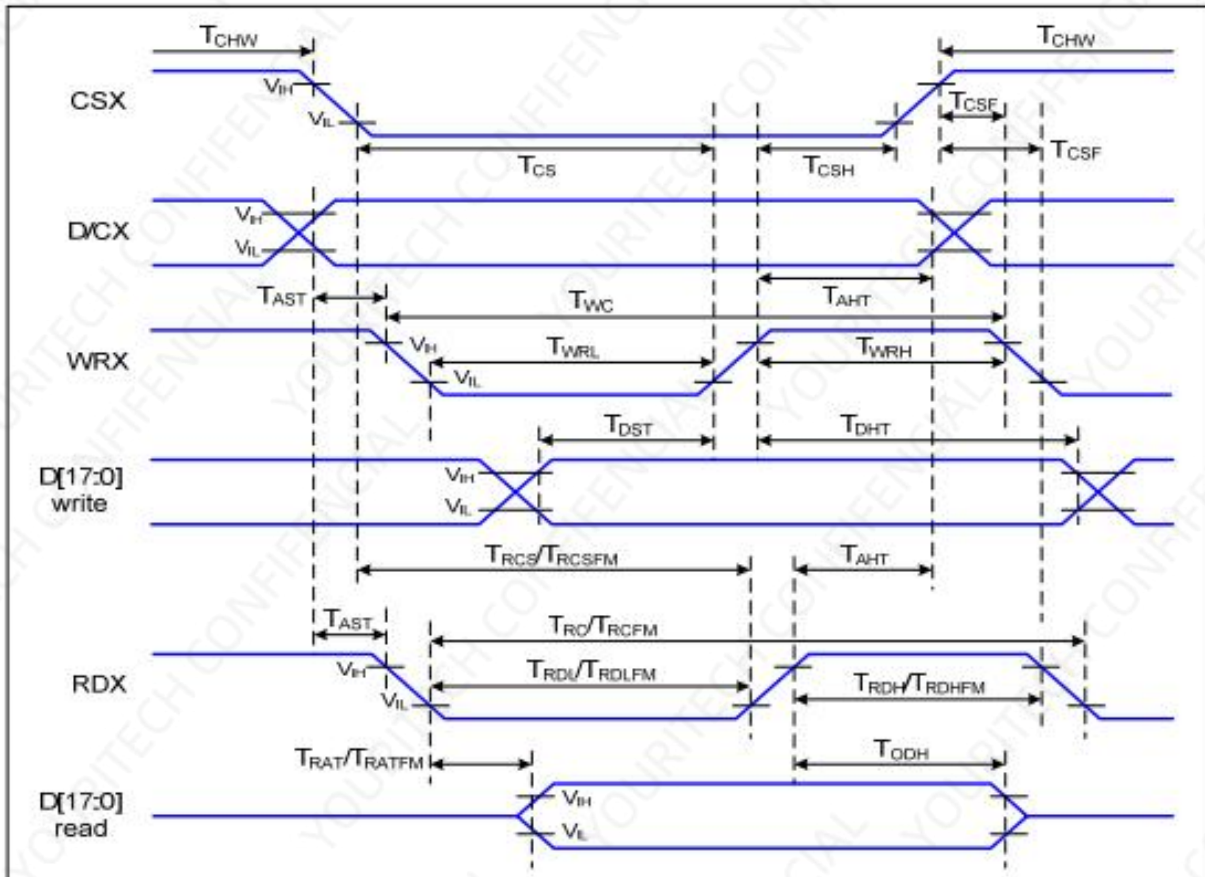

Parallel Interface Timing Characteristics (8080-Series MCU Interface)


VDDI=1.65 to VDD, VDD=2.5 to 3.3V, AGND=DGND=0V, Ta=25 °C

Signal	Symbol	Parameter	Min	Max	Unit	Description
D/CX	T _{AST}	Address setup time	TBD		ns	
	T _{AHT}	Address hold time (Write/Read)	TBD		ns	
CSX	T _{CHW}	Chip select "H" pulse width	TBD		ns	
	T _{CS}	Chip select setup time (Write)	TBD		ns	
	T _{RCS}	Chip select setup time (Read ID)	TBD		ns	
	T _{RCSFM}	Chip select setup time (Read FM)	TBD		ns	
	T _{CSF}	Chip select wait time (Write/Read)	TBD		ns	
	T _{CSH}	Chip select hold time	TBD		ns	
WRX	T _{WC}	Write cycle	TBD		ns	
	T _{WRH}	Control pulse "H" duration	TBD		ns	



	T_{WRL}	Control pulse "L" duration	TBD		ns	
RDX (ID)	T_{RC}	Read cycle (ID)	TBD		ns	When read ID data
	T_{RDH}	Control pulse "H" duration (ID)	TBD		ns	
	T_{RDL}	Control pulse "L" duration (ID)	TBD		ns	
RDX (FM)	T_{RCFM}	Read cycle (FM)	TBD		ns	When read from frame memory
	T_{RDHFM}	Control pulse "H" duration (FM)	TBD		ns	
	T_{RDLM}	Control pulse "L" duration (FM)	TBD		ns	
D[17:0]	T_{DST}	Data setup time	TBD		ns	For CL=30pF
	T_{DHT}	Data hold time	TBD		ns	
	T_{RAT}	Read access time (ID)	TBD	40	ns	
	T_{RATFM}	Read access time (FM)	TBD	340	ns	
	T_{ODH}	Output disable time	TBD	80	ns	

8080 Parallel Interface Characteristics

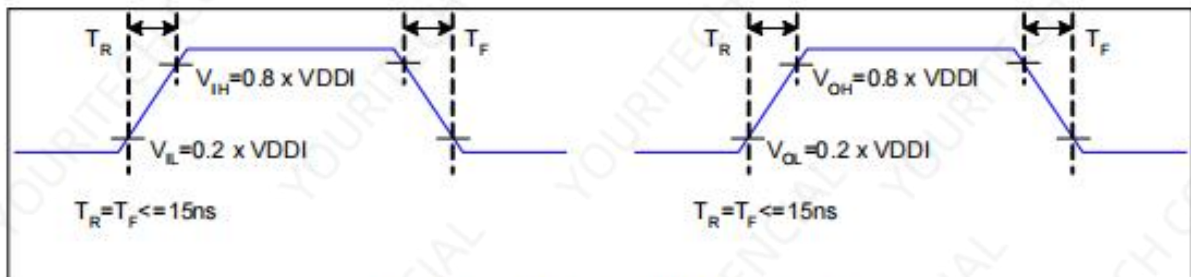


Rising and Falling Timing for I/O Signal

Note: The rising time and falling time (T_r , T_f) of input signal and fall time are specified at 15 ns or less. Logic high and low levels are specified as 20% and 80% of V_{DDI} for input signals.



Serial Data Transfer Interface Characteristics:

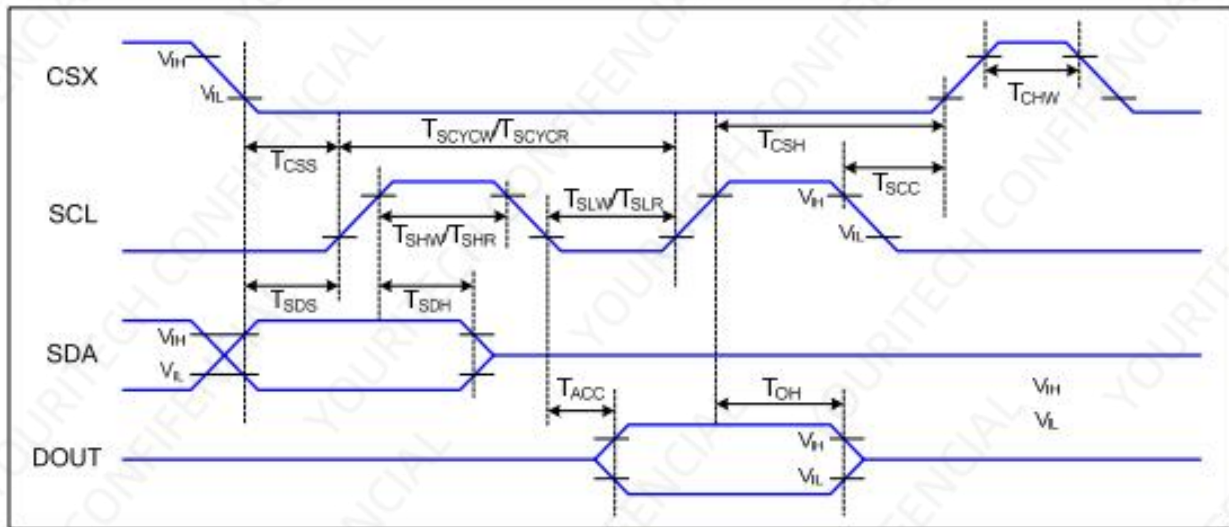

SPI Interface Timing Characteristics


$V_{DDI}=1.65$ to V_{DD} , $V_{DD}=2.5$ to $3.3V$, $AGND=DGND=0V$, $T_a=25^{\circ}C$

Signal	Symbol	Parameter	Min	Max	Unit	Description
CSX	T_{CSS}	Chip select setup time (write)	TBD		ns	
	T_{CSH}	Chip select hold time (write)	TBD		ns	
	T_{CSS}	Chip select setup time (read)	TBD		ns	
	T_{SCC}	Chip select hold time (read)	TBD		ns	
	T_{CHW}	Chip select "H" pulse width	TBD		ns	
SCL	T_{SCYCW}	Serial clock cycle (Write)	TBD		ns	
	T_{SHW}	SCL "H" pulse width (Write)	TBD		ns	
	T_{SLW}	SCL "L" pulse width (Write)	TBD		ns	
	T_{SCYCR}	Serial clock cycle (Read)	TBD		ns	
	T_{SHR}	SCL "H" pulse width (Read)	TBD		ns	
	T_{SLR}	SCL "L" pulse width (Read)	TBD		ns	
SDA (DIN)	T_{SDS}	Data setup time	TBD		ns	
	T_{SDH}	Data hold time	TBD		ns	
DOUT	T_{ACC}	Access time	TBD	50	ns	For maximum $CL=30pF$
	T_{OH}	Output disable time	TBD	50	ns	For minimum $CL=8pF$

SPI Interface Characteristics



Reset Timing

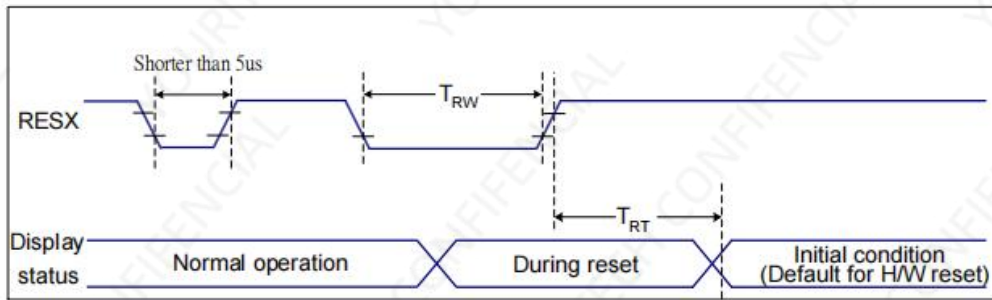

Reset Timing

$V_{DDI}=1.8V, V_{DDA}=2.8V, AGND=DGND=0V, T_a=25^{\circ}C$

Related Pins	Symbol	Parameter	MIN	MAX	Unit
RESX	TRW	Reset pulse duration	10	-	us
	TRT	Reset cancel	-	5 (Note 1, 5)	ms
				120 (Note 1, 6, 7)	ms

Table 1 Reset Timing


Notes:

1. The reset cancel includes also required time for loading ID bytes, VCOM setting and other settings from NVM (or similar device) to registers. This loading is done every time when there is HW reset cancel time (t_{RT}) within 5 ms after a rising edge of RESX.
2. Spike due to an electrostatic discharge on RESX line does not cause irregular system reset according to the table below:

RESX Pulse	Action
Shorter than 5us	Reset Rejected
Longer than 9us	Reset
Between 5us and 9us	Reset starts

3. During the Resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out -mode. The display remains the blank state in Sleep In -mode.) and then return to Default condition for Hardware Reset.

4. Spike Rejection also applies during a valid reset pulse as shown below:

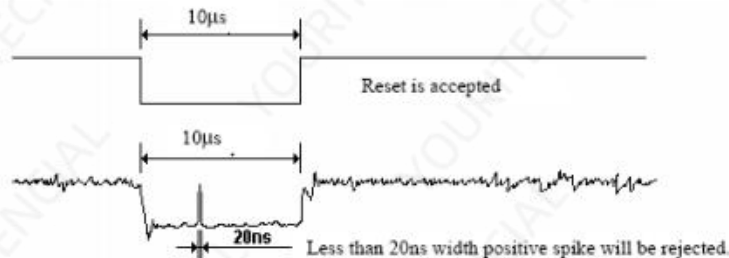

5. When Reset applied during Sleep In Mode.
6. When Reset applied during Sleep Out Mode.
7. It is necessary to wait 5msec after releasing RESX before sending commands. Also Sleep Out command cannot be sent for 120msec.



7. Optical Characteristics

Optical Specification

The test of view angle range shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Gonio meter system and TOPCON CS2000/CA310) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and ϕ equal to 0° . We refer to $\theta = 0$ ($= \theta_3$) as the 3 o'clock direction (the "right"), $\theta = 90$ ($= \theta_{12}$) as the 12 o'clock direction ("upward"), $\theta = 180$ ($= \theta_9$) as the 9 o'clock direction ("left") and $\theta = 270$ ($= \theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or ϕ , the center of the measuring spot on the Display surface shall stay fixed. The luminance, color and uniformity (etc) should be tested by CS2000/CA310. The backlight should be operating for 10 minutes prior to measurement. VDD shall be $3.3 \pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 o'clock

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	Θ_3	CR > 10	75	85	-	Deg.	Note 1
		Θ_9		75	85	-	Deg.	
	Vertical	Θ_{12}		75	85	-	Deg.	
		Θ_6		75	85	-	Deg.	
Contrast ratio		CR	$\Theta = 0^\circ$	800	1000	-	-	Note 2
Transmittance		Tr		4.0	4.8	-	%	Note 3
Color Gamut	NTSC	CIE1931	$\Theta = 0^\circ$	55	60	-	%	Note 4 C Light
Reproduction of color	White	Wx	$\Theta = 0^\circ$	Typ -0.03	0.292	Typ +0.03	-	
		Wy			0.328		-	
Response Time		Tr+Td	Ta= 25° C $\Theta = 0^\circ$	-	25	35	ms	Note 5



Notes : 1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).

2. Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Transmittance is the Value with APF and without CG.
4. The color chromaticity coordinates specified in Table 5. shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel and based on C Light
5. The electro-optical response time measurements shall be made as FIGURE 2. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_f .



8. Reliability Test Item

No.	Test Item	Test Condition	Notes
1	High Temp. Storage	+80°C / 96H	1. Functional test is OK. Missing Segment, short, unclear segment non-display, display abnormally and liquid crystal leakage un-allowed. 2. No low temperature bubbles, end seal loose and fall, frame rainbow.
2	Low Temp. Storage	-30°C / 96H	
3	High Temp. Operating	+70°C / 96H	
4	Low Temp. Operating	-20°C / 96H	
5	High Temperature / Humidity storage	50°C x 90%RH / 96H	
6	Thermal and cold shock	Static state, -20°C (30min) ~ 60°C (30min), 10 cycles	

9. Packing Method----TBD

- END -

