

INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

Optical Bonding

In-house Manufacturing

Cover glass

System solutions

OEM Solutions

Custom Display

Production Custom designs Installation

Mechanical design



Customer			
Keywords	M series, medical grade, 4.3 inch, 480*272, with configuration, LUA script, audio, video		
Model	ET043COF4880-DC/C		
Customer Approval		YOURITECH Approval	
SIGNATURE PREPARED BY	DATE	SIGNATURE PREPARED BY	DATE
_____	_____	_____	_____
REVIEWED BY		REVIEWED BY	
_____	_____	_____	_____
APPROVED BY (R&D)		APPROVED BY (R&D)	
_____	_____	_____	_____
APPROVED BY (QA)		APPROVED BY (QA)	
_____	_____	_____	_____



Catalog

1. Hardware Introduction	1
1.1 Product appearance	1
1.2 Hardware configuration	2
1.3 Debugging tool	2
2. Product Specifications	4
3. Installation Diagram	7
4. Product Size	9
5. Pin Definition	10
6. Recommend Circuit	11
6.1 SD card holder circuit	11
6.2 Audio reference circuit	12
6.3 Buzzer reference circuit	12
6.4 USB flash drive reference circuit	12
7. Reliability Test	13
7.1 ESD Test	14
7.1.1 Execution standards	14
7.1.2 Environment Test	14
7.1.3 Test data	14
7.2 High and Low Temperature Aging Test	14
7.2.1 Test the environment	14
7.2.2 Test data	15
7.3 Group Pulse Test	15
7.3.1 Execution standards	15
7.3.2 Test environment	15
7.3.3 Test Data	16
7.4 Radiation Test	16
7.4.1 Executive standard	16
7.4.2 Test environment	16
7.4.3 Test Data	17
8. Model Definition	18
9. Protocol Configuration	19
10. LUA Script Configuration	20
11. Packaging and Physical Dimensions	22
12. Product Architecture	23
13. Develop Software	24
13.1 What is Virtual TFT Simulation	25
13.2 Keil is bound to debug with the virtual TFT simulation	25
14. Development Documentation	27
15. Disclaimer	28



1. Hardware Introduction

This section mainly introduces some appearance reference diagrams, hardware configuration diagrams and tools required for debugging of the product.

1.1 Product appearance

The product adopts COF ultra-thin structure design, and the following is the appearance reference drawing of different models of this size, as shown in Figure 1-1, Figure 1-2, and Figure 1-3.

Note: There is no modification of key structural processes or major adjustments in layout, only changes and iterations in product processes or reliability, and the company will not initiate external changes, and the specific physical objects received shall prevail.



Figure 1-1 4.3-inch capacitive touch reference diagram



Figure 1-2 4.3-inch resistive touch reference diagram



Figure 1-3 4.3-inch non-touch reference diagram



1.2 Hardware configuration

The following is a reference diagram of the hardware configuration of a product of this size, with a capacitive screen as an example, as shown in Figure 1-4.

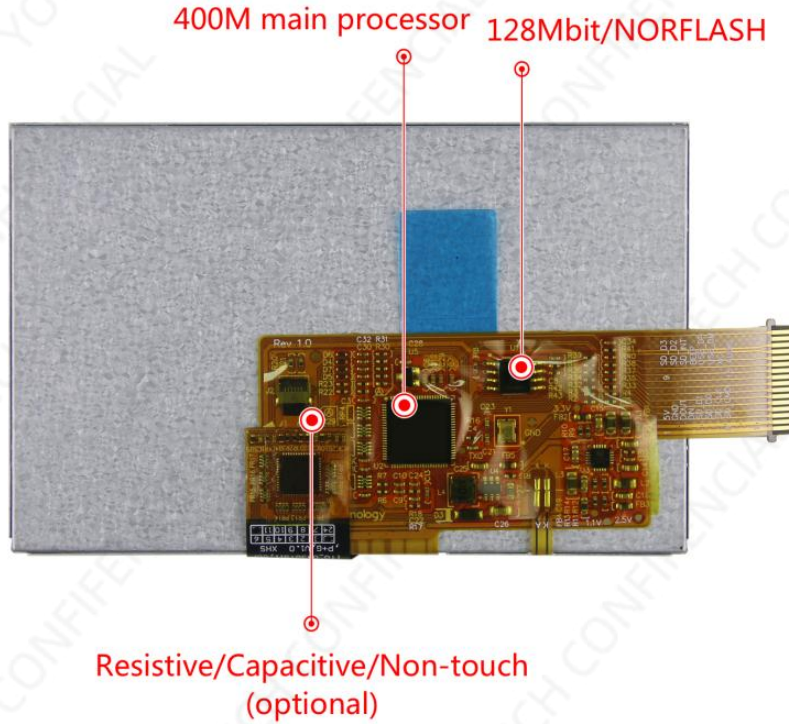


Figure 1-4 Hardware configuration diagram

1.3 Debugging tool

The following is a reference diagram of the debugging tool of this product, with an equilateral capacitive screen as an example, as shown in Figure 1-5.

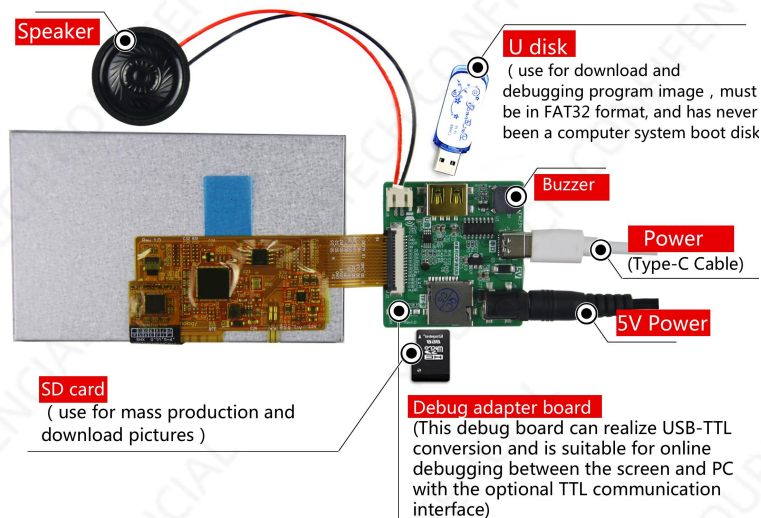


Figure 1-5 Debugging tool diagram



◆ Development of commissioning accessories (optional)	
Name	Accessory model
Serial port debugging board	M Series COF Debugging Board (Must Purchase for the First Sample)
SD card/USB flash drive	Kingston 8G/SanDisk 32GB USB3.0 USB flash drive (USB flash drive and SD card optional)
Type-C cable	TYPE-C data cable, 5V 1A 1m long, white
Power adapter	Power adapter, 5V 2A DC5.5*2.1mm Tite
<i>Note:</i> 1. In addition to the debugging board, the first purchase sample must be purchased, and other accessories customers can also prepare by themselves. 2. Both U disk and SD card can be used to update pictures, users can choose one of the two, users need to choose their own U disk and SD card, such as Kingston, SanDisk and other big brands. 3. The Type-C cable is used to connect the computer USB and the debugging board, and the user-provided cable needs to have data transmission function. 4. The debug board leads to SD card holder, USB flash drive, speaker, USB to TTL serial port and buzzer for customers to download and function test.	



2. Product Specifications

◆ Product parameters	
Model description	ET043COF4880-DC/C
Product Series	M series, medical grade
Core processor	400M SOC processor
Operating system	No operating system, power on and running
Protocol type	The default large color configuration instruction set, the host computer can be configured to run MODBUS RTU, XGUS protocol
Scripting language	LUA scripts, inside the screen can run user-written logic, protocol and algorithm functions
Size	4.3 inch
Resolution	480*272
Installation orientation	It supports 0° , 90° , 180° and 270° rotation mounted displays
Storage space	128Mbit
Font	Built-in vector font, edge anti-aliasing, support any size ASCII, GBK, GB2312, UNICODE (global language) font library, can also customize any computer font display
Image Storage	It supports JPEG and PNG (transflective/fully transparent) compression, and supports image storage of any size. Approximately 370 full-screen images can be stored in total (calculated by size of 40KB/image, BMP format is not recommended). Depending on the image compression ratio, this value will fluctuate up and down
Color	65K color, 16-bit RGB
Voltage	5V(±0.2V)
Power Consumption	Darkest backlight: 0.4W
	Brightest backlight: 1.0W
Communication Method	TTL
Communicate Baud-rate	1200~921600bps, typical baud rate: 115200bps
Communication Connector Specifications	FPC1.0-16P
Image Local Download	SD card, serial port, U disk
Firmware Local/Remote Upgrade	Insert SD card to upgrade locally / support remote serial port of user motherboard to upgrade screen firmware
Picture Remote Upgrade	Support users to remotely use their motherboard serial port to upgrade screen-related picture projects, font libraries, configuration files, etc.
Screen active display area (AA)	Length * width =95.0mm*53.9mm
Product Size (L*W*H)	105.5mm*67.2mm*6.8mm (MAX, include TP and FPC)



Supporting Host Computer Software	VisualTFT®
Audio playback	MP3 audio format (speaker 4 Ω 2W, mono), which shares storage space with pictures. If the sample rate of mp3 format is 128kbps, the storage will be 0.92MB/min
Video playback	MP4 video format, sharing storage space with pictures. If a video file with a resolution of 800*600, a video bitrate of 3000Kbps, an audio bitrate of 166Kbps, and a frame rate of 25Hz occupies 21.9MB/min

◆ Reliability parameters

Operating temperature	-20~+70°C
Storage temperature	-30~+80°C
ESD test	IEC 61000-4-2 Air: ± 8 KV(No restart)
EFT test	IEC 61000-4-4 national standard 4 (voltage: ± 4 KV; frequency: 100/5KHZ; time: 120S), no restart, no abnormal display, no abnormal touch, etc., the test function is normal
Radiation test	EN55022 ClassB

◆ Product Core Competitiveness

Learning Cycle	30 minutes to familiarize yourself with the development environment, 3 days to complete the HMI design
Program Debugging	The host computer integrates a "TFT Simulate", which does not need to be connected to the hardware, and Keil IDE is directly bound to it for debugging
Startup Time	Run at power-on, no system load time
Configure Controls	It has a variety of configuration controls such as multi-language, button, text, drop-down menu, progress bar, slider, meter, animation, QR code, curve, historical curve, data record, circular progress bar, sprite slide control and so on
System Keyboard	Built-in virtual number, character keyboard, support Chinese and English input methods, customize keyboard
Data Logging	Supports exporting data logging control content to SD card
Layer Technology	The system has multiple built-in display layers for faster switching
Multi-Language Capabilities	Factory preset up to 15 languages of any country in the world, one-click switch of the required language, without the need for multiple sets of UI
Logical Operation Processing	The LUA script compiler is embedded in the host computer, and users can customize various complex logic relationships and protocols on the screen, meeting 99.9% of the product function requirements of customers
Remote Upgrade	Support remote serial port to upgrade screen firmware, project files, specified pictures, configuration files and font libraries
Life Cycle	Using traditional YOURITECH processors, non-stop goods for many years

◆ LCD

Display Type	TFT LCD
Backlight Tube	LED



Brightness (cd/m ²)	220
Backlight Life (h)	>20,000
Contrast Ratio	200:1
Visual Angle (L/R/T/B)	55/55/55/30

◆ Touch Panel (resistive, capacitive touch optional)

Touch Type	Capacitive touch screen
Capacitive Screen Touch Mode	Point, swipe touch
Capacitive Screen Light Transmittance	More than 90%
Capacitive Screen Touch Times	The number of capacitive screen touches is theoretically infinite, and the touch life is related to the working environment (dust, humidity)
Capacitor Cover Plate Customization	The "glass cover plate + capacitive touch" integrated lamination service can be customized according to the size of the user's drawing
Touch Type	Resistive touch screen
Resistive Screen Touch Mode	Point, swipe touch
Resistive Screen Light Transmittance	More than 80%
Resistive Screen Touch Times	The number of single points of the same pixel is more than 1 million

◆ Customized Services

Custom Fee	Sign a 1000PCS contract at one time, and some can be exempted from customization fees
Hardware Circuitry	Customizable PCB size, circuit thickness, add user circuit, military-grade temperature display, etc.
Software Customization	Customize special instructions or controls according to user needs to reduce user development difficulty
Art Services	Can provide picture art and product structure design services
Other	Customized on demand to meet all user needs



3. Installation Diagram

Installation method 1:

COF系列安装方法1示意图
(COF SERIES INSTALLATION METHOD 1 SCHEMATIC DIAGRAM)



第一步：如上图所示，客户根据产品尺寸开好孔位
(STEP 1: AS SHOWN IN THE FIGURE, THE CUSTOMER OPENS THE HOLE POSITION ACCORDING TO THE PRODUCT INCH)



第二步：如上图所示，将触摸盖板后面四周3M胶保护膜撕掉，露出3M胶
(STEP 2: AS SHOWN IN THE FIGURE ABOVE, PEEL OFF THE 3M ADHESIVE PROTECTIVE FILM AROUND THE BACK OF THE TOUCH COVER PLATE TO EXPOSE 3M ADHESIVE)



第三步：如上图所示，压紧屏幕确保屏幕盖板的3M胶与机柜表面完全贴合
(STEP 3: AS SHOWN IN THE ABOVE SHOWS THAT THE SCREEN IS PRESSED FIRMLY TO ENSURE THAT THE 3M GLUE OF THE SCREEN COVER IS COMPLETELY ATTACHED TO THE SURFACE OF THE CABINET)



第四步：如上图所示，将客户主板安装于外壳上并拧紧螺丝固定,并插入排线
(STEP 4: AS SHOWN IN THE FIGURE ABOVE, INSTALL THE CUSTOMER MASTER ON THE HOUSING AND TIGHTEN THE SCREWS TO SECURE IT, AND INSERT THE CABLE)



第五步：安装完成
(STEP 5: INSTALLATION COMPLETE)



Installation method 2:

COF系列安装方法2示意图
(COF SERIES INSTALLATION METHOD 2 SCHEMATIC DIAGRAM)




第一步：如上图所示，客户根据产品尺寸开好孔位
(STEP 1: AS SHOWN IN THE FIGURE, THE CUSTOMER OPENS THE HOLE POSITION ACCORDING TO THE PRODUCT INCH)



第二步：如上图所示，将触摸盖板后面四周3M胶保护膜撕掉，露出3M胶
(STEP 2: AS SHOWN IN THE FIGURE ABOVE, PEEL OFF THE 3M ADHESIVE PROTECTIVE FILM AROUND THE BACK OF THE TOUCH COVER PLATE TO EXPOSE 3M ADHESIVE)



第三步：如上图所示，压紧屏幕确保屏幕盖板的3M胶与机柜表面完全贴合
(STEP 3: AS SHOWN IN THE ABOVE SHOWS THAT THE SCREEN IS PRESSED FIRMLY TO ENSURE THAT THE 3M GLUE OF THE SCREEN COVER IS COMPLETELY ATTACHED TO THE SURFACE OF THE CABINET)

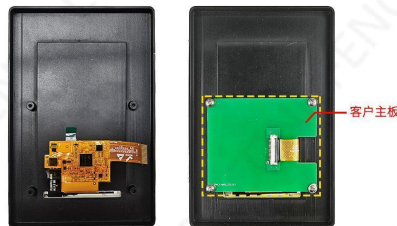


第四步：如上图所示，将客户主板安装于外壳上并拧紧螺丝固定,并插入排线
(STEP 4: AS SHOWN IN THE FIGURE ABOVE, INSTALL THE CUSTOMER MASTER ON THE HOUSING AND TIGHTEN THE SCREWS TO SECURE IT, AND INSERT THE CABLE)



第五步：安装完成
(STEP 5: INSTALLATION COMPLETE)



5. Pin Definition

Number	Definition	Description	Reference Diagram
1	5V	Power Supply	
2	GND	Power Ground	
3	DOUT	Serial port screen output, connected to the user's RXD terminal	
4	DIN	Serial port screen input, connected to the user's TXD terminal	
5	SD_D1	SD card D1 cable	
6	SD_D0	SD card D0 cable	
7	SD_CLK	SD card clock line	
8	SD_CMD	SD card command line	
9	SD_D3	SD card D3 cable	
10	SD_D2	SD card D2 cable	
11	SD_INT	SD card detection pin	
12	BEEP	Buzzer PWM output	
13	USB_DP	USB D+signal cable	
14	USB_DM	USB D-signal cable	
15	NC	Undefined	
16	AUDIO	Audio output data cable	



6.1 SD card holder circuit

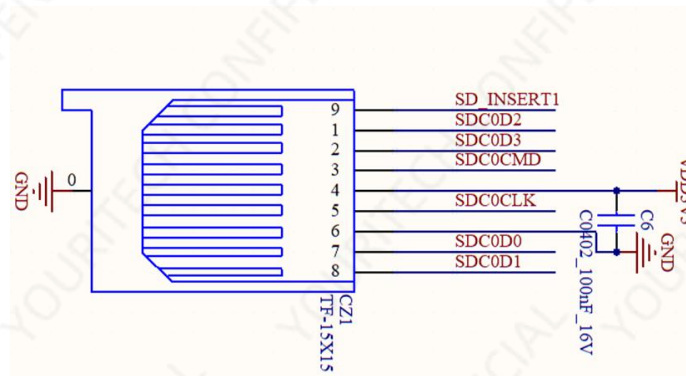


Figure 6-2 SD deck circuit schematic



6.2 Audio reference circuit

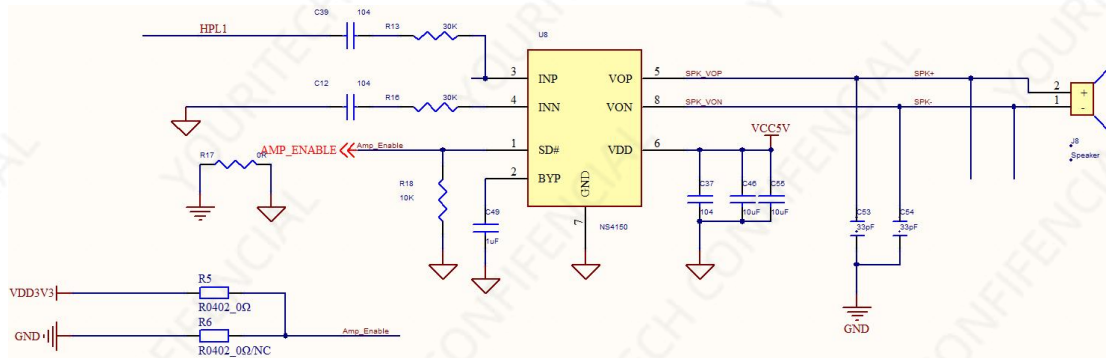


Figure 6-3: Audio reference circuit

6.3 Buzzer reference circuit

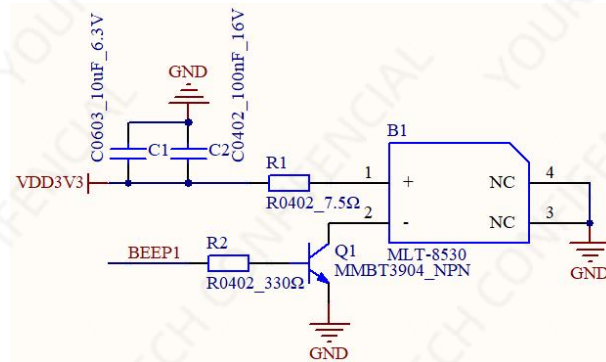


Figure 6-4 Buzzer reference circuit

6.4 USB flash drive reference circuit

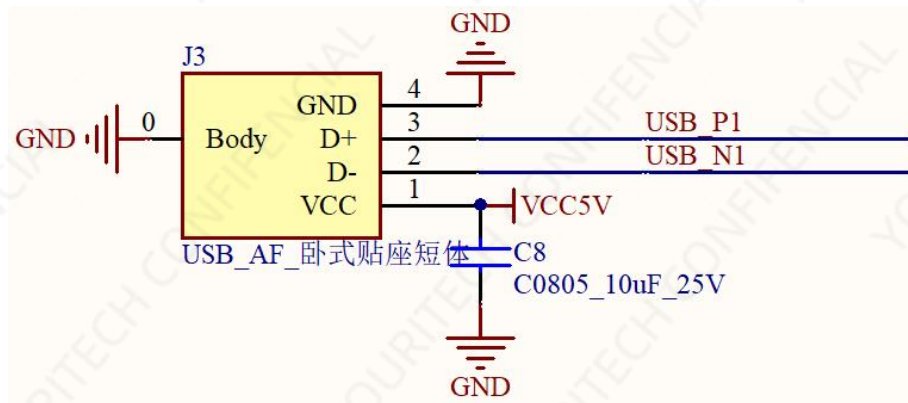


Figure 6-5 USB flash drive reference circuit



7. Reliability Test

All serial port screens of YOURITECH Technology have carried out a series of process reliability tests before mass production: high and low temperature, ESD, pulse burst, radiation, touch life and other tests to ensure product quality, as shown in Figure 7-1.



Figure 7-1 Reliability Test Equipment



7.1 ESD Test

7.1.1 Execution standards

Execution Standards	IEC 61000-4-2
---------------------	---------------

7.1.2 Environment Test

Test ambient temperature: 25°C

Test ambient humidity: 50%

Test process: Place the product on the test stand, lay down on the serial port screen buckle and the display area in order to make contact and air discharge as shown in Figure 7-2. Observe whether if the screen have reset or restarted, or abnormal display.



Figure 7-2 ESD test diagram

7.1.3 Test data

Product Model	Discharge type	Humidity	Test result
ET043COF4880-DC/C	air	±8KV	No restart, no abnormal display, normal function
	air	±10KV	Occasional reset and restart, no abnormal display, normal function

Note: The current test tests are all product bare tests, and the ESD performance index of the whole machine will be higher if the screen and machine are well grounded on the actual product assembly machine, or the surface of the touchpad is protected by PVC or cover

7.2 High and Low Temperature Aging Test

7.2.1 Test the environment

Test ambient temperature: -20~+70°C

Test ambient humidity: 60%±3%RH

Test process: Place the product in the high and low temperature test box at an angle as shown in Figure 7-3. Pass the 72H high temperature, low temperature and high and low temperature alternating change aging test. Observe whether the screen resets and restarts during the test and after the test. Abnormalities, abnormal functions, etc.





Figure 7-3 High and low temperature aging test diagram

7.2.2 Test data

Product Model	Temperature	Humidity	Test results
ET043COF4880-DC/C (Capacitive, resistive, non-touch)	High temperature (70°C)	60%	No restart, no abnormal display, normal function
	Low temperature (-20°C)	60%	No restart, no abnormal display, normal function
	Alternating high and low temperature (-20~70°C)	60%	No restart, no abnormal display, normal function

7.3 Group Pulse Test

7.3.1 Execution standards

Execution standards

IEC 61000-4-4

7.3.2 Test environment

Test ambient temperature: 25°C

Test ambient humidity: 50%

Test process: Place the product on the test stand, and power the screen through the power supply after the pulse group generator is coupled to the pulse group, as shown in Figure 7-4. During the test, observe whether the screen resets, displays abnormally, or touches, abnormalities and other phenomena.



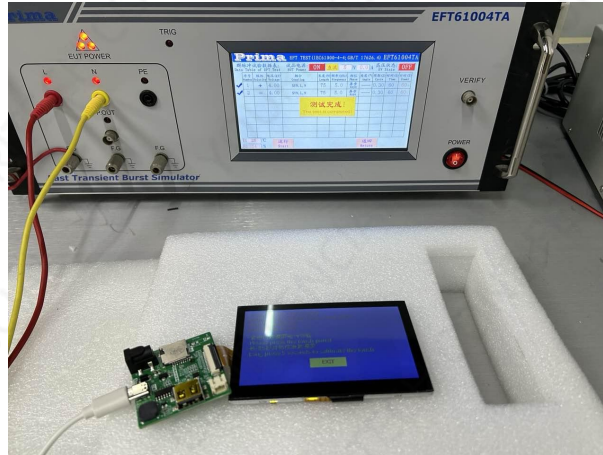


Figure 7-4 Group pulse test diagram

7.3.3 Test Data

Product Model	Test Standard			Test Results
ET043COF4880-DC/C	National standard 4			No restart, normal communication, normal function
	Voltage (KV)	Frequency (KHZ)	Time (S)	
	±4.0	5	120	

7.4 Radiation Test

7.4.1 Executive standard

Executive Standard	EN55022 ClassB
--------------------	----------------

7.4.2 Test environment

The radiation test laboratory environment is shown in Figure 7-5.

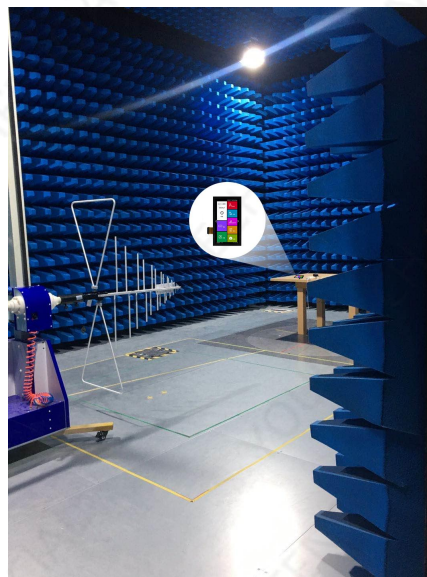


Figure 7-5 Radiation test chart



7.4.3 Test Data

1. Radiation test horizontal test data, as shown in Figure 7-6.

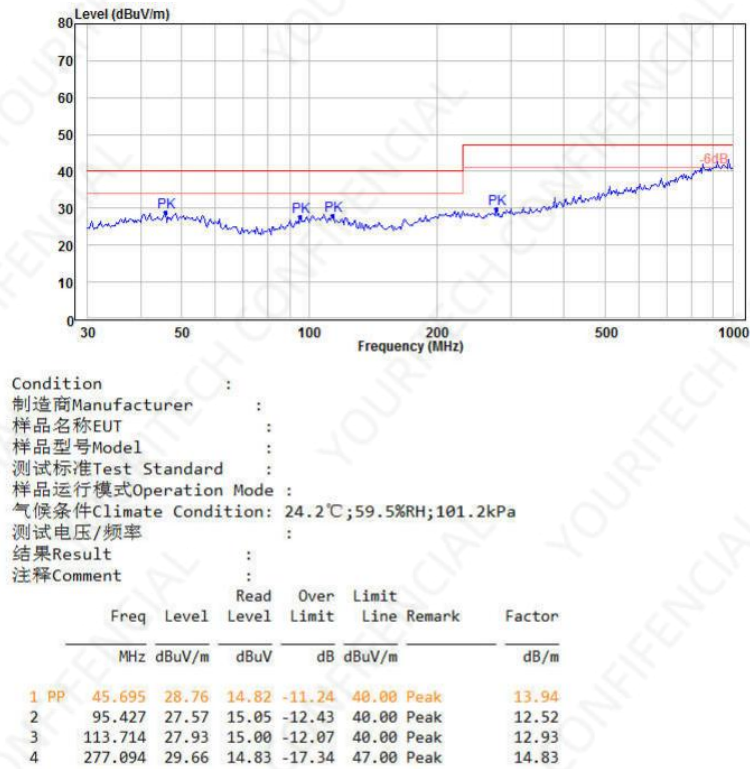


Figure 7-6: Horizontal direction of the radiation test

2. Radiation test vertical test data, as shown in Figure 7-7.

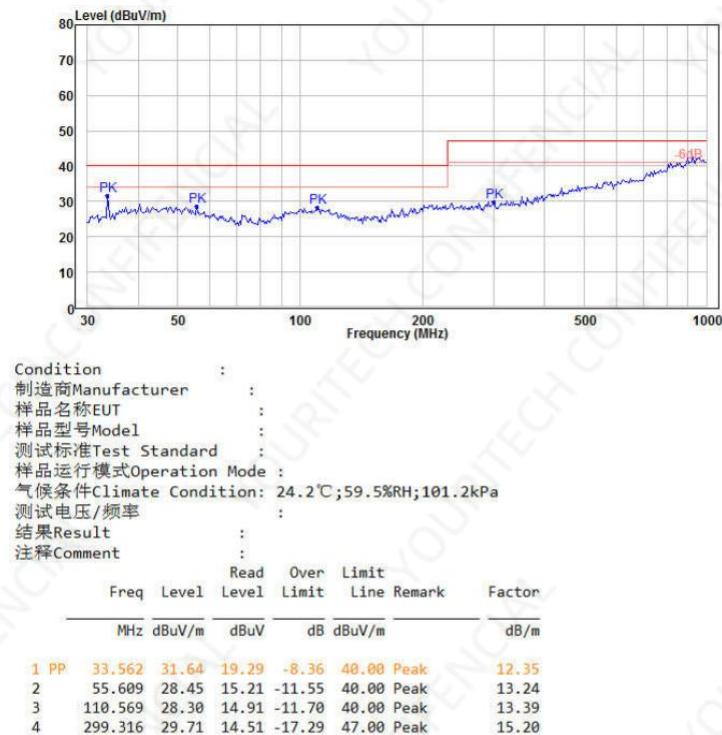


Figure 7-7 Radiation test vertical



9. Protocol Configuration

Most of the serial port screens launched by YOURITECH default to the YOURITECH configuration instruction set, and users can run MODBUS RTU, XGUS and other protocols through the host computer configuration.

Open the VisualTFT host computer software, click [Tools] in the menu bar → [Protocol and Variable Settings], as shown in Figure 9-1, enter the protocol configuration interface, and users can choose to enable the corresponding protocol according to their needs, as shown in Figure 9-2.

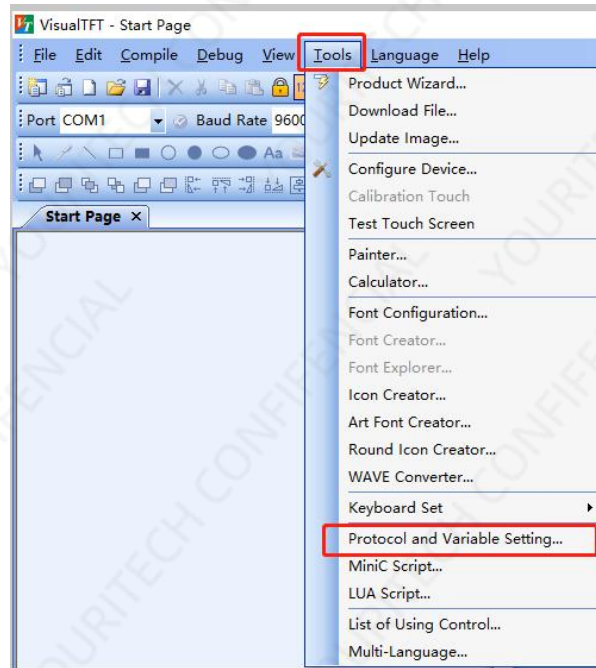


Figure 9-1 Protocol and variable setting

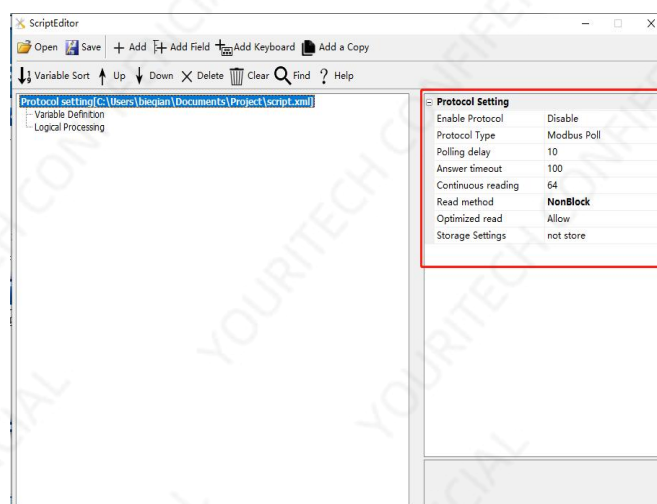


Figure 9-2 Protocol configuration interface



10. LUA Script Configuration

The serial port screens of M-type, S-type and IoT series launched YOURITECH all support LUA language scripts. The serial port screen provides a wealth of LUA script API and callback interface, users can directly set and obtain the running status of all configuration controls by calling the API interface, combined with the written logic processing, the screen can complete the predetermined action without the participation of the external MCU, reducing the data communication between the MCU and the screen.

LUA is a lightweight scripting language with simpler syntax logic than C, and developers can get started directly. The LUA language comes with a well-functioning mathematical function library, string processing, JSON and other libraries, and has function support for common mathematical operations, such as square, sine cosine, and absolute value; Due to the high main frequency of the screen itself, all complex algorithms are processed by the screen, which greatly reduces the execution overhead of the user's MCU.

LUA tutorials are available on third-party websites:

<https://www.runoob.com/lua/lua-tutorial.html>.

To write the LUA script of the project in the VisualTFT software, you can click [Tools] → [LUA Script Programming] in the menu bar to open it, as shown in Figure 10-1, and enter the LUA scripting interface, as shown in Figure 10-2.

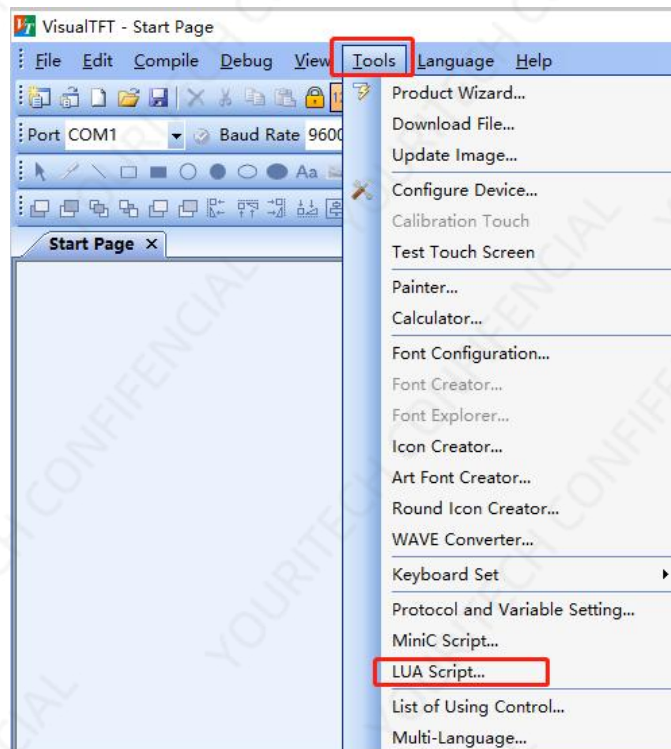


Figure 10-1 LUA script programming



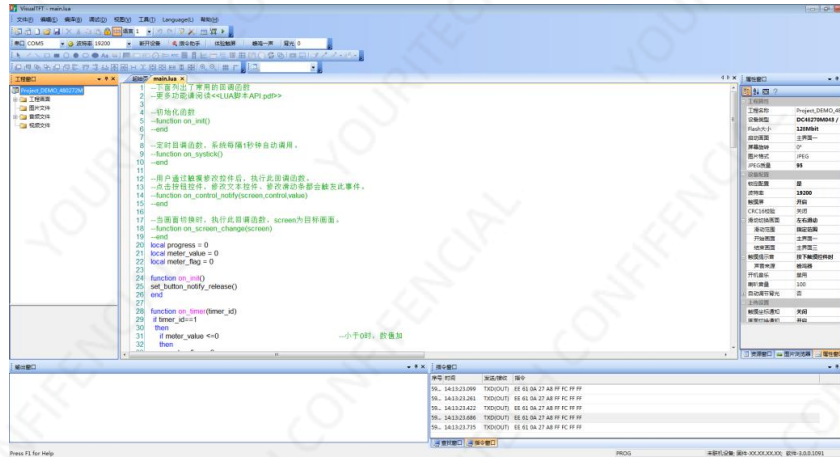


Figure 10-2 LUA scripting interface



11. Packaging and Physical Dimensions

Unit weight					
Net weight (KG)	0.07				
Packaging standard and total weight					
Box model	Box size (length * width * height, unit mm)	Number of layers	Quantity (PCS)/layer	Total quantity (pieces)	Total weight(KG)
Box 1	616*478*275	1	100	100	8.25

Note: The total weight does not include the weight of the accessory; The above weight information is an estimated weight for reference only, and the actual weight is subject to the actual weight.



12. Product Architecture

The industrial serial port screen launched by YOURITECH is a serial display terminal integrating TFT display driver, picture font storage, GUI operation, audio playback and various configuration controls. The user microcomputer only needs to send and receive the corresponding serial port instructions to easily realize the display of text, pictures and curves.

The S series serial port screen is equipped with a 96M Cortex-M3 core 32-bit processor, which integrates PSRAM and FLASH storage, and the system architecture is shown in Figure 12-1.

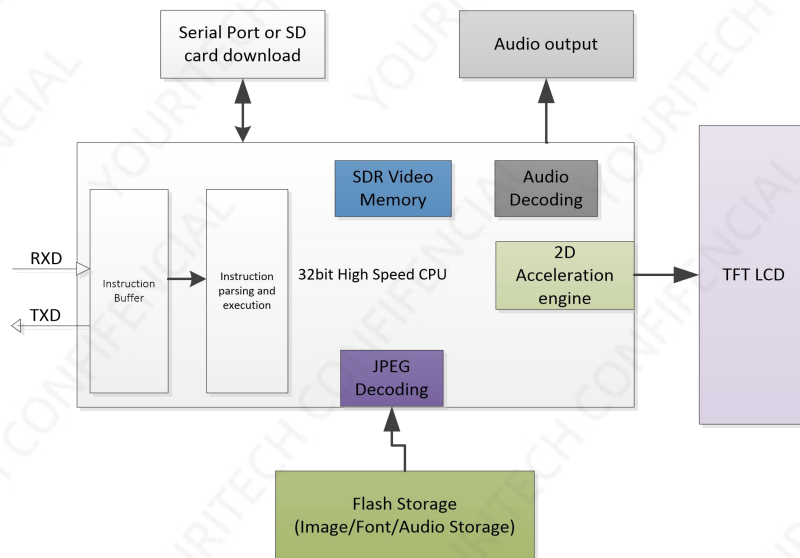


Figure 12-1 M series serial port screen internal structure diagram

The main advantages of choosing a high-performance 32-bit dual-core processor architecture are:

1. A dedicated 32-bit 400M SOC processor optimized for picture display, with a 2D acceleration engine and JPEG picture hardware decoding, so that the display can be combined with various special effects, and the display effect is smooth and gorgeous.
2. No operating system, continuous 24*365h hours of uninterrupted power can work reliably, no garbage redundant files.



13. Develop Software

VisualTFT is a serial port screen development and debugging software independently developed by Youritech, integrating the first "Virtual TFT Simulator" simulator in China, which is free for life. After the user creates a new project, import the designed art pictures, and then configure the buttons and other controls in each screen, simulate correctly, and finally download the entire project to the serial port screen. The software interface is shown in Figure 13-1.

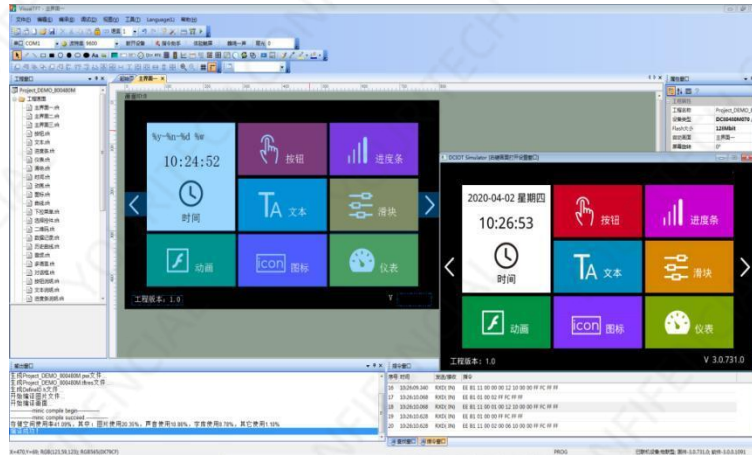


Figure 13-1 Main interface of VisualTFT

Any user only needs 3 steps to complete complex HMI design within 30 minutes.

1. Prepare art assets

Arrange for artists to design the pictures required for the product, such as the boot screen, text background, button icon, and prompt box.

2. Use the supporting VisualTFT software for screen editing, scripting, control configuration and image download.

First, using the supporting host computer VisualTFT software, the pre-designed art pictures are arranged and configured for interface, and then the "virtual serial port screen" is run for simulation, and finally the entire project can be downloaded to the internal memory of the serial port screen through SD/UART (depending on the hardware configuration of different models). PC software assigns a unique ID number to each screen, picture, and control in the project. Users can also write the required logic control and algorithms through the script editor embedded in the host computer to reduce the communication frequency between the screen and the motherboard.

3. The user's single-chip microcomputer monitors and sends the corresponding serial port command control screen display.

After the project is downloaded to the screen, once a button is pressed on the screen, the user's MCU serial port will receive the button ID information or coordinate value uploaded on the screen. By parsing the ID number, the user can obtain the screen position and functional attributes of the current button, so that the relevant peripheral device actions or screen update display can be controlled.

For non-touch products, the user micro-controller does not need to listen to the information uploaded by the button ID, but only needs to send relevant instructions for screen switching and



text picture display.

13.1 What is Virtual TFT Simulation

"Virtual TFT simulation" is the first domestic exclusive serial port screen emulator developed by Youritech. After the user installs the VisualTFT software of the host computer, it can be run and used. The simulation results of the virtual serial port screen are exactly the same as the real serial port screen. Therefore, there is no need to purchase hardware during the pre-development evaluation, and it can communicate with each other through its own single-chip RS232 serial port, and click on the button will immediately upload the button control information, as shown in Figure 13-2. Once the developer has debugged it, the real hardware does not need to be debugged.



Figure 13-2 Online debugging of the serial port of the user single-chip microcomputer and the "virtual TFT simulation"

13.2 Keil is bound to debug with the virtual TFT simulation

In order to further improve the development efficiency, users can also bind Debug debugging with the "virtual TFT simulation" through the Keil development environment. When the program is single-step debugging, all running results can be presented on the "virtual TFT simulation", which greatly saves the engineer's development time, as shown in Figure 13-3. Once the project interface is changed, users no longer need to re-download pictures to the serial port screen, and all pre-project evaluations can be completed based on the PC.

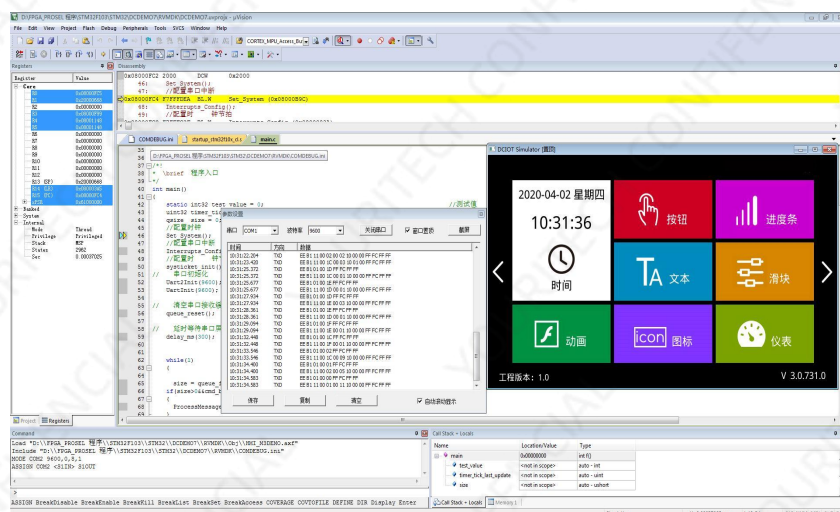


Figure 13-3 The Keil development environment is bound to the virtual TFT simulation for debugging



Note: The debugging of the virtual TFT simulation needs keil software support, in the debug process, enter dirvtreg in the command serial port, you need to list SxIN (according to the single-chip microcomputer, x may represent 0, 1, 2), if there is a list of representatives keil has virtualized the serial port of the single-chip microcomputer to the register, so that it can be used.



14. Development Documentation

In order to complete product development faster, beginners can log in to the official website www.youritech.com, enter the "Data Download" column, and download the corresponding "Development Package", "Youritech Configuration Instruction Set", "LUA Tutorial Application" and other technical documents.



15. Disclaimer

This document provides information about the products of Youritech , aiming to assist customers to accelerate the research and development progress of products, and any routine procedures, technical documents, CAD drawings and other materials and information provided in the service process or other channels are for reference only, and customers have the right not to use or modify by themselves. The company does not provide any guarantee of completeness, reliability, etc., and the company does not assume any responsibility for special, incidental or indirect losses caused by any reason during the customer's use. Youritech technology products cannot be used as the only control equipment in military, medical, lifesaving or life support purposes.

This document does not grant any license to any intellectual property rights, and no license to any intellectual property rights, express or implied, or by prohibition of speaking or otherwise. Except for the responsibilities stated in the terms and conditions of sale of its products, Youritech Technology does not assume any other responsibilities. Moreover, Youritech Technology does not make any express or implied guarantee for the sale and/or use of Youritech Technology products, including the fitness for a particular purpose of the product, merchant-ability or infringement liability for any patent, copyright or other intellectual property rights. Youritech Technology may make changes to product specifications and product descriptions at any time without prior notice.

