

INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Production Custom designs Installation

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Optical Bonding

Cover glass

System solutions

OEM Solutions

Custom Display

Mechanical design



Product Specifications



Customer	Standard
Description	9.7" E-PAPER DISPLAY
Model Name	ET097EP01-J
Date	2026/01/19
Revision	1.0

	Design Engineering		
	Approval	Check	Design



CONTENTS

1.Overview.....	3
2.Features.....	3
3.Mechanical Specifications.....	3
4.Mechanical Drawing of EPD Module.....	4
5.Input/output Pin Assignment.....	5
6.Electrical Characteristics.....	6
7.Command Table.....	12
8.Optical Specifications.....	16
9.Typical Application Circuit.....	17
10.Reliability test.....	18
11.Matched Development Kit.....	19
12.Inspection method and condition.....	20
13.Handling, Safety and Environmental Requirements.....	24
14.Precautions.....	25

1. Overview

ET097EP01-J is a reflective electrophoretic technology display module on an active matrix TFT substrate. The panel is capable of displaying black, white, yellow and red images depending on the associated lookup table used. The circuitry on the panel includes an integrated gate and source driver, timing controller, oscillator, DC-DC boost circuit, and memory to store the frame buffer and lookup tables, and additional circuitry to control VCOM and BORDER settings.

2. Features

- Highlight Red and Yellow color
- High contrast
- High reflectance
- Ultra wide viewing angle
- Ultra low power consumption
- Pure reflective mode
- Bi-stable display
- Antiglare hard-coated front-surface
- Low current deep sleep mode
- On chip display RAM
- Waveform stored in On-chip OTP
- Serial peripheral interface available
- On-chip oscillator
- On-chip booster and regulator control for generating VCOM, Gate and Source driving voltage
- I2C signal master interface to read external temperature sensor
- Available in COG package

3. Mechanical Specifications

Parameter	Specifications	Unit	Remark
Screen Size	9.7	Inch	
Display Resolution	960 (H) × 672 (V)	Pixel	Dpi:120
Active Area	201.6×141.12	mm	
Pixel Pitch	0.21 × 0.21	mm	
Pixel Configuration	Rectangle		
Outline Dimension	210.8(H)×154.9(V) ×1.0(D)	mm	
Weight	62±0.5	g	

5. Input /Output Pin Assignment

5.	Name	I/O	Description	Remark
1	NC		Do not connect with other NC pins	Keep Open
2	GDR	I/O	N-Channel MOSFET Gate Drive Control	
3	RESE	I/O	Current Sense Input for the Control Loop	
4	NC		Do not connect with other NC pins	Keep Open
5	VSH2	C	Positive Source driving voltage	
6	TSCL	O	This pin is I ² C Interface to digital temperature sensor Clock pin. External pull up resistor is required when connecting to I ² C slave. When not in use: Open	
7	TSDA	I/O	This pin is I ² C Interface to digital temperature sensor Data pin. External pull up resistor is required when connecting to I ² C slave. When not in use: Open	
8	BS1	I	Interface Selection Pin	
9	BUSY	O	Busy state output pin	
10	RST_N	I	Reset	
11	DC	I	Data /Command control pin	
12	CSB	I	Chip select input pin	
13	SCL	I	Serial Clock pin (SPI)	
14	SDA	I/O	Serial Data pin (SPI)	
15	VDDIO	P	Power for interface logic pins	
16	VDD	P	Power Supply for the chip	
17	GND	P	Ground	
18	VDDD	P	Core logic power pin	
19	VPP	P	Reserved	
20	VSH1	C	Positive Source driving voltage	
21	VGH	C	Power Supply pin for VSH	
22	VSL	C	Negative Source driving voltage	
23	VGL	C	Power Supply pin for VCOM and VSL	

24	VCOM	C	VCOM driving voltage	
----	------	---	----------------------	--

Key: I = Input, O =Output, I/O = Bi-directional

(input/output), P = Power pin, C = Capacitor PinNC = Not Connected,

Pull L =connect to GND, Pull H = connect to VDDIO

6. Electrical Characteristics

6.1 Absolute Maximum Rating

Parameter	Symbol	Rating	Unit
Logic supply voltage	VDD	-0.5 to +4.0	V
Logic Input voltage	VIN	-0.5 to V _{DDIO} +0.5	V
Logic Output voltage	VOU	-0.5 to V _{DDIO} +0.5	V
Operating Temp range	TOPR	0 to +40	°C
Storage Temp range	TSTG	-25 to +70	°C
Optimal Storage Temp	TSTGo	23±2	°C
Optimal Storage Humidity	HSTGo	55±10	%RH


Note: Maximum ratings are those values beyond which damages to the device may occur. Functional operation should be restricted to the limits in the Electrical Characteristics tables or Pin Description section

6.2 Panel DC Characteristics

The following specifications apply for: $V_{SS}=0V$, $V_{CI}=3.0V$, $T_{OPR}=25^{\circ}C$

Parameter	Symbol	Conditions	Applicable pin	Min.	Typ.	Max	Units
Single ground	V_{SS}	-		-	0	-	V
VDD supply operation voltage	V_{DD}	-	VDD	2.3	3.0	3.6	V
High level input voltage	V_{IH}	-	-	$0.8 V_{DDIO}$	-	-	V
Low level input voltage	V_{IL}	-	-	-	-	$0.2 V_{DDIO}$	V
High level output voltage	V_{OH}	$I_{OH} = -100\mu A$	-	$0.8 V_{DDIO}$	-	-	V
Low level output voltage	V_{OL}	$I_{OL} = 100\mu A$	-	-	-	$0.2 V_{DDIO}$	V
Typical power	P_{TYP}	$V_{DD}=3.0V$	-	-	57		mW
Deep sleep mode	P_{STPY}	$V_{DD}=3.0V$	-	-	TBD	-	mW
Typical operating current	$I_{opr_V_{DD}}$	$V_{DD}=3.0V$	-	-	19	-	mA
Full/Partial update time	-	$25^{\circ}C$	-	-	21/12	-	sec
Sleep mode current	$I_{slp_V_{DD}}$	DC/DC off No clock No input load Ram data retain	-	-	5	-	μA
Deep sleep mode current	$I_{dslp_V_{DD}}$	DC/DC off No clock No input load Ram data not retain	-	-	1	-	μA

Notes: 1. The typical power is measured with following transition from horizontal 4 scale pattern to vertical 4 scale pattern.

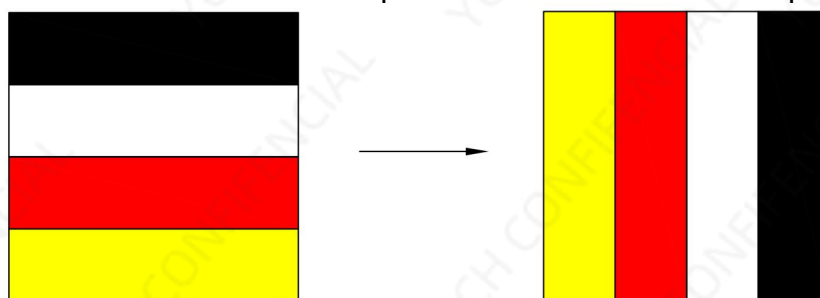

2. The deep sleep power is the consumed power when the panel controller is in deep sleep mode.
3. The listed electrical/optical characteristics are only guaranteed under the controller & waveform provided by YOURITECH.
4. Electrical measurement: Multimeter

6.3 Panel AC Characteristics

6.3.1 MCU Interface selection

The IC can support 3-wire/4-wire serial peripheral. In the IC, the MCU interface is pin selectable by BS1 shown in Table 6-1.

Note

- (1) L is connected to GND
- (2) H is connected to VDDIO

Table 6-1 : Interface pins assignment under different MCU interface

MCU Interface	BS1	RST_N	CSB	DC	SCL	SDA
4-wire serial peripheral interface (SPI)	L	Required	CSB	D/C	SCL	SDA
3-wire serial peripheral interface (SPI) – 9 bits SPI	H	Required	CSB	L	SCL	SDA

6.3.2 MCU Serial Interface (4-wire SPI)

The 4-wire SPI consists of serial clock (SCL), serial data (SDA), D/C, and CSB. The control pins status in 4-wire SPI during reading/writing command/data is shown in Table 6-2. The read/write procedure of 4-wire SPI is shown in Figure 6-1.

Table 6-2: Control pins status of 4-wire SPI

Function	SCL pin	SDA pin	D/C pin	CSB pin
Write command	↑	Command bit	L	L
Read/Write data	↑	Data bit	H	L

Note:

- (1) L is connected to GND and H is connected to VDDIO
- (2) ↑ stands for rising edge of signal
- (3) SDA (Write Mode) is shifted into an 8-bit shift register on every rising edge of SCL in the order of D7, D6, ... D0. The level of D/C should be kept over the whole byte. The data byte in the shift register is written to the Graphic Display Data RAM (RAM)/Data Byte register or command Byte register according to D/C pin.

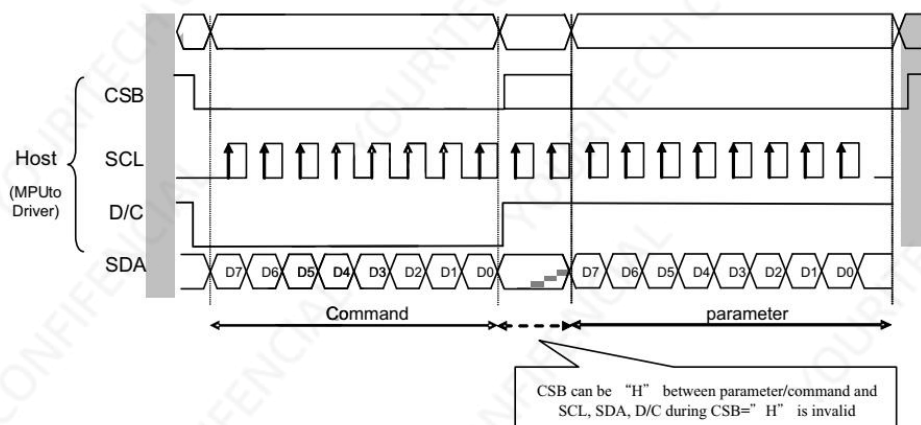


Figure 6-1 : Read/Write procedure in 4-wire SPI mode

6.3.3 MCU Serial Interface (3-wire SPI)

The 3-wire SPI consists of serial clock (SCL), serial data (SDA) and CSB. The operation is similar to 4-wire SPI, while the D/C pin is not used and it must be tied to LOW.

The control pins status in 3-wire SPI is shown in Table 6-3. The read/write procedure of 3-wire SPI is shown in Figure 6-2.

In the read/write operation, a 9-bit data will be shifted into the shift register on every clock rising edge. The bit shifting sequence is D/C bit, D7 bit, D6 bit to D0 bit. The first bit is the D/C bit, which determines whether the following byte is command or data. When the D/C bit is 0, the following byte is command. When the D/C bit is 1, the following byte is data. Table 6-3 shows the write procedure in 3-wire SPI.

Table 6-3: Control pins status of 3-wire SPI

Function	SCL pin	SDA pin	D/C pin	CSB pin
Write command	↑	Command bit	Tie LOW	L
Read/Write data	↑	Data bit	Tie LOW	L

Note:

(1) L is connected to GND and H is connected to VDDIO(2)

↑ stands for rising edge of signal

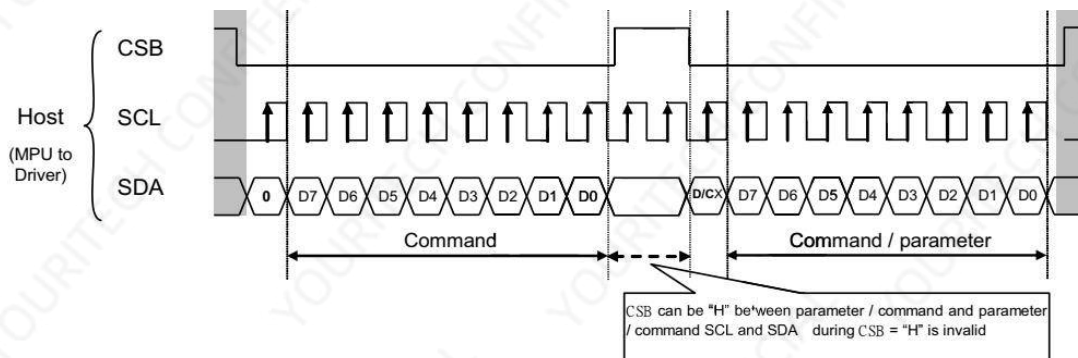


Figure 6-2: Read/Write procedure in 3-wire SPI mode


6.3.4 Interface Timing

The following specifications apply for:


VDDIO - GND = 2.3V to 3.6V, TOPR = 25°C, CL=20pF

Symbol	Parameter	Min	Typ	Max	Unit
t _{CSS}	CSB select setup time	TBD			ns
t _{SCH}	CSB select hold time	TBD			ns
t _{SCC}	CSB deselect setup time	TBD			ns
t _{CHW}	CSB deselect hold time	TBD			ns
t _{SCYCW}	Serial clock cycle (Write)	TBD			ns
t _{SHW}	SCL "H" pulse width (Write)	TBD			ns
t _{SLW}	SCL "L" pulse width (Write)	TBD			ns
t _{SCYCL}	Serial clock cycle (Read)	TBD			ns
t _{SHR}	SCL "H" pulse width (Read)	TBD			ns
t _{SLR}	SCL "L" pulse width (Read)	TBD			ns
t _{SDS}	Data setup time	TBD			ns
t _{SDH}	Data hold time	TBD			ns
t _{ACC}	Access time			TBD	ns
t _{OH}	Output disable time	TBD			ns


Note: All timings are based on 20% to 80% of VDDIO-GND

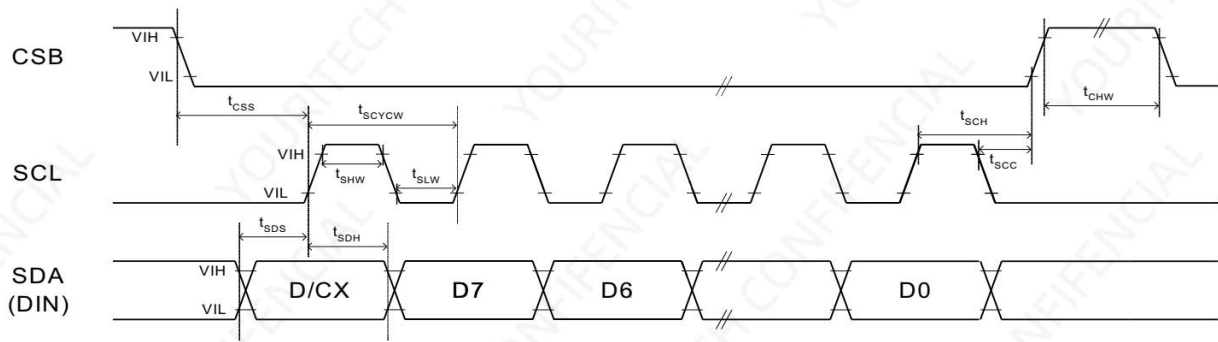


3 pin serial interface characteristics (write mode)

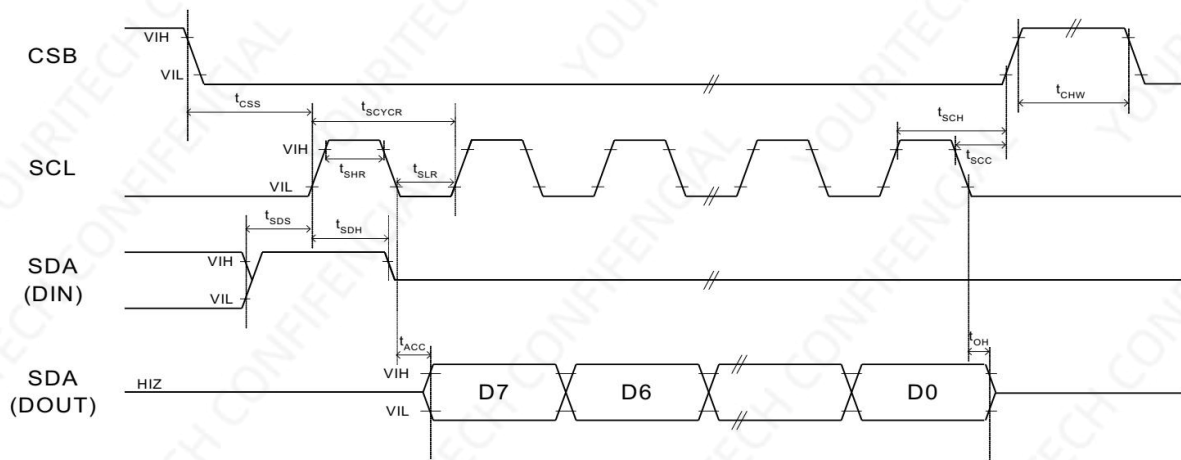

3 pin serial interface characteristics (read mode)

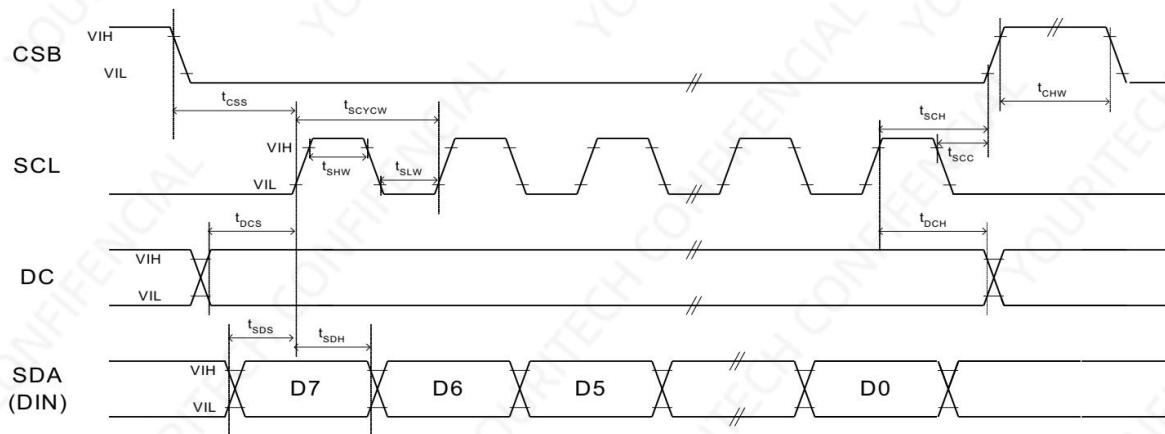

4 pin serial interface characteristics (write mode)

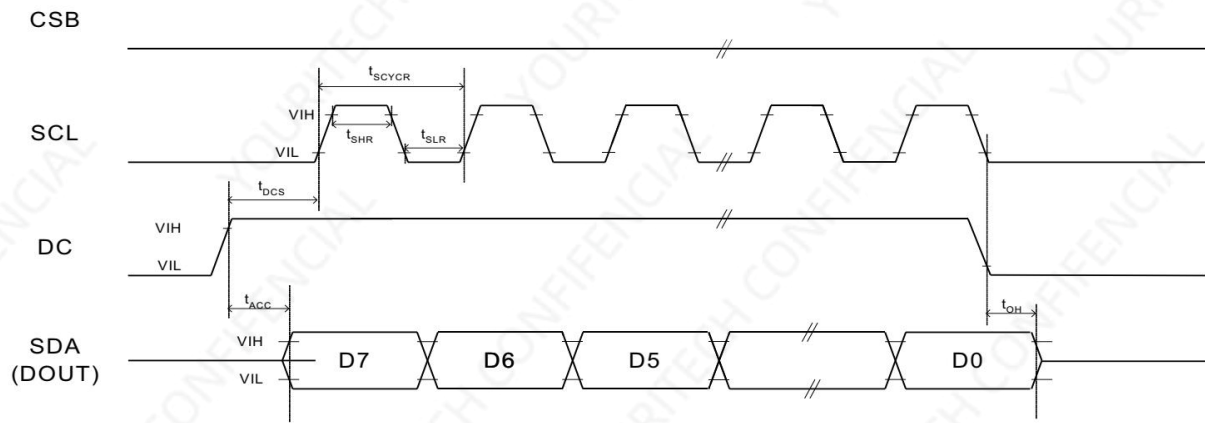**4 pin serial interface characteristics (read mode)**

7. Command Table

R/W#	D/C#	Hex	D7	D6	D5	D4	D3	D2	D1	D0	Command	Description									
0	0	00	0	0	0	0	0	0	0	0	PSR	Panel Setting Register A[7:0] = 0Fh [POR] B[7:0] = 09h [POR]									
0	1		A ₇	A ₆	A ₅	0	A ₃	A ₂	A ₁	A ₀		A[7:6] ~ RES[1:0] Display Resolution setting (source x gate) 00b: 960 x 680 (Default) 01b: 960 x 672 10b: 960 x 640 11b: 880 x 528									
0	1		B ₇	B ₆	B ₅	B ₄	B ₃	B ₂	B ₁	B ₀		A[3] ~ UD Gate Scan Direction: 0: Scan down. First line to Last line: Gn-1 ... G0 1: Scan up. (Default) First line to Last line: G0 ... Gn-1 A[2] ~ SHL Source Shift Direction: 0: Shift left. First data to Last data: Sn-1 ... S0 1: Shift right. (Default) First data to Last data: S0 ... Sn-1 A[1] ~ SHD_N Booster and Regulator Switch: 0: PON / POF command will not execute 1: PON / POF command will execute (Default) A[0] ~ RST_N Soft Reset: 0: The controller is reset. Reset all registers to their default value. Driver all function will be disabled. 1: Normal operation (Default). BUSY_N signal will become "0" until Soft reset is finished.									
0	0	01	0	0	0	0	0	0	0	1	PWR	Power setting Register A[5:0] = 07h [POR] B[7:0] = F0h [POR]									
0	1		0	0	0	0	0	A ₂	A ₁	A ₀		A[2:0] = 111 [POR]									
0	1		1	1	1	1	0	0	B ₁	B ₀		B[1:0] ~ VGPN [1:0] Internal VGH / VGL Voltage Level Selection: <table><tr><th>VGPN [1:0]</th><th>Gate Voltage Level</th></tr><tr><td>00</td><td>VGH=20V,VGL=-20V (Default) VSH=15V, VSL=-15V</td></tr><tr><td>01</td><td>VGH=17V ,VGL=-17V VSH=15V, VSL=-15V</td></tr><tr><td>10</td><td>VGH=15V,VGL=-15V VSH=15V, VSL=-15V</td></tr><tr><td>11</td><td>Reserved.</td></tr></table>	VGPN [1:0]	Gate Voltage Level	00	VGH=20V,VGL=-20V (Default) VSH=15V, VSL=-15V	01	VGH=17V ,VGL=-17V VSH=15V, VSL=-15V	10	VGH=15V,VGL=-15V VSH=15V, VSL=-15V	11
VGPN [1:0]	Gate Voltage Level																				
00	VGH=20V,VGL=-20V (Default) VSH=15V, VSL=-15V																				
01	VGH=17V ,VGL=-17V VSH=15V, VSL=-15V																				
10	VGH=15V,VGL=-15V VSH=15V, VSL=-15V																				
11	Reserved.																				
R/W#	D/C#	Hex	D7	D6	D5	D4	D3	D2	D1	D0	Command	Description									
0	0	02	0	0	0	0	0	0	1	0	POF	Power OFF Command Register									
0	1		0	0	0	0	0	0	0	0		After power off command, driver will power off based on the Power OFF Sequence, then BUSY_N signal will become "0". The Power OFF command will turn off DCDC, source driver, gate driver, VCOM driver, temperature sensor, but register and SRAM data will keep until VDD off. SD output will base on previous condition. *Remark: POF works at PON only									

0	0	04	0	0	0	0	0	1	0	0	PON	Power ON Command Register After the Power ON command, driver will power on based on the Power ON Sequence. After power on command and all power sequence are ready, then BUSY_N signal will become "1". * Remark: PON Include booster on, VSHx/VSLx regulator on With default BTST, timing is >80ms										
0	0	06	0	0	0	0	0	1	1	0	BTST	VGH Booster Soft Start Setting Register (for VGH) A[6:0] = 0Fh [POR] B[6:0] = 8Bh [POR] C[6:0] = 93h [POR] D[6:0] = A1h [POR] A[3:2] ~ T_VGHSSA [1:0] = 11 (Default) VGH booster soft start Phase A duration A[1:0] ~ T_VGHSSB [1:0] = 11 (Default) VGH booster soft start Phase B duration <table><tr><td></td><td>Soft Start Phase Period (ms)</td></tr><tr><td>00</td><td>10</td></tr><tr><td>01</td><td>20</td></tr><tr><td>10</td><td>30</td></tr><tr><td>11</td><td>40</td></tr></table> B[6:4] ~ VGHSSA_DRV [2:0], = 000 (Default) VGH Phase A Driving Strength C[6:4] ~ VGHSSB_DRV [2:0], = 001 (Default) VGH Phase B Driving Strength D[6:4] ~ VGHSSC_DRV [2:0] = 001 (Default) VGH Phase C Driving Strength 000~011 for Driving Strength 0~3. Others are reserved. B[3:0] ~ VGHSSA_OFFT [3:0], = 1011 (Default) VGH Phase A Minimum OFF Time C[3:0] ~ VGHSSB_OFFT [3:0], = 0011 (Default) VGH Phase B Minimum OFF Time D[3:0] ~ VGHSSC_OFFT [3:0], = 0011 (Default) VGH Phase C Minimum OFF Time 0000~1111 for Minimum OFF Time (setting) OFFH0 to OFFHF.		Soft Start Phase Period (ms)	00	10	01	20	10	30	11	40
	Soft Start Phase Period (ms)																					
00	10																					
01	20																					
10	30																					
11	40																					
0	1		0	0	0	0	A ₃	A ₂	A ₁	A ₀												
0	1		1	B ₆	B ₅	B ₄	B ₃	B ₂	B ₁	B ₀												
0	1		1	C ₆	C ₅	C ₄	C ₃	C ₂	C ₁	C ₀												
0	1		1	D ₆	D ₅	D ₄	D ₃	D ₂	D ₁	D ₀												
R/W#	D/C#	Hex	D7	D6	D5	D4	D3	D2	D1	D0	Command	Description										
0	0	07	0	0	0	0	0	1	1	1	DSLSP	Deep Sleep Register This command makes the chip enter the deep-sleep mode. The deep sleep mode could return to stand-by mode by hardware reset assertion. The only one parameter is a check code, the command would be executed if check code is A5h.										
0	1		1	0	1	0	0	1	0	1												
0	0	17	0	0	0	1	0	1	1	1	AUTO	Auto Sequence Register This command makes the chip enter the auto sequence Single-chip application ONLY. Auto Sequence Option 0xA5: Start Auto Sequence (PON > DRF > POF) 0xA7: Start Auto Sequence (PON > DRF > POF > DSLSP) Others: No effect BUSY_N signal will become "0" until Auto Sequence is finished.										
0	1		A ₇	A ₆	A ₅	A ₄	A ₃	A ₂	A ₁	A ₀												

0	0	0	10	0	0	0	1	0	0	0	0	DTM	Data Start transmission Register This command indicates that user starts to transmit data. Then write to SRAM. While complete data transmission, user must send a Data Refresh command (R12H). Then the chip will start to send data/VCOM for panel. KPixel[1:0] Source Driver Output <table><tr><td></td><td>DDX=1 (Default)</td></tr><tr><td>00b</td><td>Gray 0</td></tr><tr><td>01b</td><td>Gray 1</td></tr><tr><td>10b</td><td>Gray 2</td></tr><tr><td>11b</td><td>Gray 3</td></tr></table> After issue this command, the host must send at least 1 byte data to the device.		DDX=1 (Default)	00b	Gray 0	01b	Gray 1	10b	Gray 2	11b	Gray 3											
	DDX=1 (Default)																																	
00b	Gray 0																																	
01b	Gray 1																																	
10b	Gray 2																																	
11b	Gray 3																																	
2 bit per pixel <table><tr><td>0</td><td>1</td><td></td><td>KPixel1 [1:0]</td><td>KPixel2 [1:0]</td><td>KPixel3 [1:0]</td><td>KPixel4 [1:0]</td></tr><tr><td>:</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>0</td><td>1</td><td></td><td>KPixel (4M-3) [1:0]</td><td>KPixel (4M-2) [1:0]</td><td>KPixel (4M-1) [1:0]</td><td>KPixel (4M) [1:0]</td></tr></table>												0	1		KPixel1 [1:0]	KPixel2 [1:0]	KPixel3 [1:0]	KPixel4 [1:0]	:							0	1		KPixel (4M-3) [1:0]	KPixel (4M-2) [1:0]	KPixel (4M-1) [1:0]	KPixel (4M) [1:0]		
0	1		KPixel1 [1:0]	KPixel2 [1:0]	KPixel3 [1:0]	KPixel4 [1:0]																												
:																																		
0	1		KPixel (4M-3) [1:0]	KPixel (4M-2) [1:0]	KPixel (4M-1) [1:0]	KPixel (4M) [1:0]																												
0	0	12	0	0	0	1	0	0	1	0	DRF	Display Refresh Command Register After this command is issued, driver will refresh display (data/VCOM) according to SRAM data and LUT. LUT can define DCVCOM/ACVCOM. After Display Refresh command, BUSY_N signal will become "0" until display update is finished.																						
0	1		0	0	0	0	0	0	0	0																								
0	0	40	0	1	0	0	0	0	0	0	TSC	Temperature Sensor Command Register This command enables internal temperature sensor. BUSY_N will go low during temperature sensor is under operation. Then the temperature value can be read in 1degC step A[7:0] ~ TS [7:0] <table><tr><td>TS [7:0]</td><td>Return Value(degC)</td></tr><tr><td>E7h</td><td>-25</td></tr><tr><td>...</td><td>...</td></tr><tr><td>FFh</td><td>-1</td></tr><tr><td>00h</td><td>0</td></tr><tr><td>01h</td><td>1</td></tr><tr><td>...</td><td>...</td></tr><tr><td>19h</td><td>25</td></tr><tr><td>...</td><td>...</td></tr><tr><td>31h</td><td>49</td></tr><tr><td>32h</td><td>50</td></tr></table>	TS [7:0]	Return Value(degC)	E7h	-25	...	...	FFh	-1	00h	0	01h	1	...	...	19h	25	...	...	31h	49	32h	50
TS [7:0]	Return Value(degC)																																	
E7h	-25																																	
...	...																																	
FFh	-1																																	
00h	0																																	
01h	1																																	
...	...																																	
19h	25																																	
...	...																																	
31h	49																																	
32h	50																																	
1	1		A ₇	A ₆	A ₅	A ₄	A ₃	A ₂	A ₁	A ₀																								
R/W#	D/C#	Hex	D7	D6	D5	D4	D3	D2	D1	D0	Command	Description																						
0	0	50	0	1	0	1	0	0	0	0	CDI	A[7:0] = 97h [POR] A[7:5]~VBD [2:0] Border Output Selection: <table><tr><td></td><td>DDX=1</td></tr><tr><td>VBD[2:0]</td><td>LUT (Default)</td></tr><tr><td>000</td><td>Gray 0</td></tr><tr><td>001</td><td>Gray 1</td></tr><tr><td>010</td><td>Gray 2</td></tr><tr><td>011</td><td>Gray 3</td></tr><tr><td>100</td><td>HIZ(Default)</td></tr></table>		DDX=1	VBD[2:0]	LUT (Default)	000	Gray 0	001	Gray 1	010	Gray 2	011	Gray 3	100	HIZ(Default)								
	DDX=1																																	
VBD[2:0]	LUT (Default)																																	
000	Gray 0																																	
001	Gray 1																																	
010	Gray 2																																	
011	Gray 3																																	
100	HIZ(Default)																																	
0	1		A ₇	A ₆	A ₅	0	0	0	0	0																								
0	0	61	0	1	1	0	0	0	0	1	TRES	Resolution setting Register This command defines alternative resolution A[7:0] ~ HRES[9:0] Horizontal Display Resolution Remark: Horizontal resolution should be 4-multiple. B[8:0] ~ VRES[9:0] Vertical Display Resolution e.g. HRES= 3C0h, VRES= 2A8h <table><tr><td>UD,SHL</td><td>Source and gate sequence</td></tr><tr><td>00</td><td>S679,G959 to S0,G0</td></tr><tr><td>01</td><td>S0, G959 to S679,G0</td></tr><tr><td>10</td><td>S679,G0 to S0, G959</td></tr><tr><td>11</td><td>S0,G0 to S679, G295</td></tr></table> Remark: 1) Both PSR.RES & TRES command can set panel resolution. Priority will be given to the last received PSR or TRES command. 2) VRES[8:0] >= 120	UD,SHL	Source and gate sequence	00	S679,G959 to S0,G0	01	S0, G959 to S679,G0	10	S679,G0 to S0, G959	11	S0,G0 to S679, G295												
UD,SHL	Source and gate sequence																																	
00	S679,G959 to S0,G0																																	
01	S0, G959 to S679,G0																																	
10	S679,G0 to S0, G959																																	
11	S0,G0 to S679, G295																																	
0	1		0	0	0	0	0	0	A ₉	A ₈																								
0	1		A ₇	A ₆	A ₅	A ₄	A ₃	A ₂	A ₁	A ₀																								
0	1		0	0	0	0	0	0	B ₉	B ₈																								
0	1		B ₇	B ₆	B ₅	B ₄	B ₃	B ₂	B ₁	B ₀																								
0	0	70	0	1	1	1	0	0	0	0	REV	Chip Revision Register The command is to read the ID A[7:0] = 07h [POR]																						
1	1		A ₇	A ₆	A ₅	A ₄	A ₃	A ₂	A ₁	A ₀																								

R/W#	D/C#	Hex	D7	D6	D5	D4	D3	D2	D1	D0	Command	Description																	
0	0	80	1	0	0	0	0	0	0	0	AMV	Auto Measurement VCOM Register This command implements related VCOM sensing setting. A[7:0] = 00h [POR]																	
0	1		A ₇	A ₆	A ₅	A ₄	0	0	0	A ₀		A[7:6] ~ P[1:0] Number of sensing Points 00: 2 (Default) 01: 4 10: 8 11: 16 A[5:4] ~AMVT[1:0] Auto Measure Vcom Time: Sensing Time 00: 5 sec. (Default) 01: 10 sec. 10: 15 sec. 11: 20 sec. A[0] ~ AMVE Auto Measure Vcom Enable (/Disable): 0: Disabled (Default) 1: Enabled Requirement: 1) AMV works at PON only 2) BUSY_N signal will become "0" until Vcom sensing is finished.																	
0	0	81	1	0	0	0	0	0	0	1	VV	Auto Measurement VCOM Register This command gets the Vcom value after AMV.																	
1	1		1	0	A ₅	A ₄	A ₃	A ₂	A ₁	A ₀		A[5:0] ~ VV[5:0]: Vcom read Value , valid range from -0.2V to -4.0V. <table><tr><td>VV[5:0]</td><td>Vcom read value</td></tr><tr><td>00h</td><td>Reserved</td></tr><tr><td>04h</td><td>-0.2V</td></tr><tr><td>08h</td><td>-0.4V</td></tr><tr><td>0Ch</td><td>-0.6V</td></tr><tr><td>10h</td><td>-0.8V</td></tr><tr><td>...</td><td>...</td></tr><tr><td>50h</td><td>-4.0V</td></tr><tr><td>others</td><td>Reserved</td></tr></table>	VV[5:0]	Vcom read value	00h	Reserved	04h	-0.2V	08h	-0.4V	0Ch	-0.6V	10h	-0.8V	...	...	50h	-4.0V	others
VV[5:0]	Vcom read value																												
00h	Reserved																												
04h	-0.2V																												
08h	-0.4V																												
0Ch	-0.6V																												
10h	-0.8V																												
...	...																												
50h	-4.0V																												
others	Reserved																												
0	0	82	1	0	0	0	0	0	1	0	VDCS	VCM_DC Setting Register This command sets VCOM_DC value. A[7:0] = 00h [POR]																	
0	1		A ₇	A ₆	A ₅	A ₄	A ₃	A ₂	0	0		A[7] ~ OTP_VCM Vcom follow VDCS after RESET. 0: Disable (Default), auto load from OTP if it is valid. 1: Enable, VCOM value from the VDCS[6:0] A[6:0] ~ VDCS[6:0]: VCOM_DC Setting, 0.2V step from -0.2V to -4.0V. <table><tr><td>VDCS [6:0]</td><td>VCOM_DC Setting</td></tr><tr><td>00h</td><td>Reserved</td></tr><tr><td>04h</td><td>-0.2V</td></tr><tr><td>08h</td><td>-0.4V</td></tr><tr><td>0Ch</td><td>-0.6V</td></tr><tr><td>10h</td><td>-0.8V</td></tr><tr><td>...</td><td>...</td></tr><tr><td>50h</td><td>-4.0V</td></tr><tr><td>others</td><td>Reserved</td></tr></table>	VDCS [6:0]	VCOM_DC Setting	00h	Reserved	04h	-0.2V	08h	-0.4V	0Ch	-0.6V	10h	-0.8V	...	...	50h	-4.0V	others
VDCS [6:0]	VCOM_DC Setting																												
00h	Reserved																												
04h	-0.2V																												
08h	-0.4V																												
0Ch	-0.6V																												
10h	-0.8V																												
...	...																												
50h	-4.0V																												
others	Reserved																												
R/W#	D/C#	Hex	D7	D6	D5	D4	D3	D2	D1	D0	Command	Description																	
0	0	90	1	0	0	1	0	0	0	0	PGM	Program Mode This command is to set OTP program mode After this command is issued, the chip would enter the program mode. After the programming procedure completed, a hardware reset is necessary for leave the program mode																	
												BUSY_N signal will become 0 until PGM mode is ready.																	

0	0	91	1	0	0	1	0	0	0	1	APG	Active Program This command is to execute OTP program After this command is issued, the chip would program the OTP. BUSY_N signal will become 0 until the programming is completed. Requirement: In PON mode with internal programming power.
0	0	92	1	0	0	1	0	0	1	0	ROTP	Read OTP Data This command is to read the OTP content from SRAM. The 1 st byte read is dummy byte. The 2 nd byte read is the content of Address 0 in OTP The N+1 byte read is the content of Address n in OTP After issue this command, the host must read at least 1 byte data from the device.
1	1		1 st ~ dummy 2 nd ~ N+1th Parameter									
0	0	E3	1	1	1	0	0	0	1	1	PWS	Power Saving Register This command is sets for saving power VCOM/Source power saving during display refresh period. A[7:0] = 65h [POR]
0	1		A ₇	A ₆	A ₅	A ₄	A ₃	A ₂	A ₁	A ₀		


8. Optical Specifications

Measurements are made with that the illumination is under an angle of 45 degree, the detection is perpendicular unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ.	Max	Units	Notes
R	White Reflectivity	White	30	35	-	%	8-1
CR	Contrast Ratio	Indoor	8:1		-		8-2
GN	2Grey Level	-		$DS+(WS-DS)*n(m-1)$			8-3
T update	Image update time	at 25 °C		26	-	sec	
Life		Topr		1000000times or 5years			

Notes: 8-1. Luminance meter: Eye-One Pro Spectrophotometer.

8-2. CR=Surface Reflectance with all white pixel/Surface Reflectance with all black pixels. 8-3. WS: White state, DS: Dark state

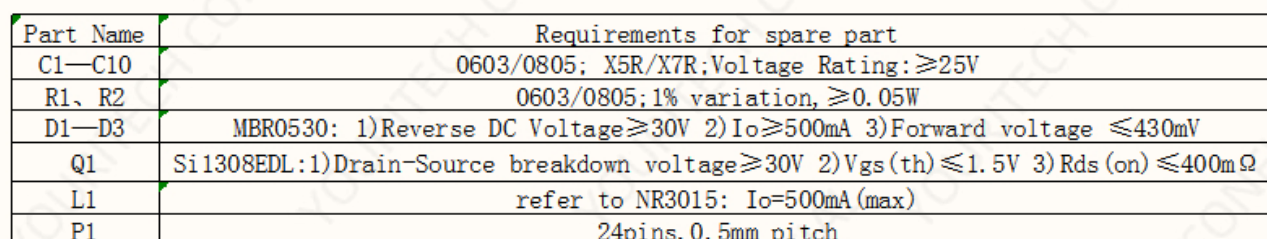

10. Reliability test

NO	Test items	Test condition
1	Low-Temperature Storage	T = -25°C, 240 h Test in white pattern
2	High-Temperature Storage	T=60° C, RH=35%, 240h Test in white pattern
3	High-Temperature Operation	T=40° C, RH=35%, 240h
4	Low-Temperature Operation	T=0° C, 240h
5	High-Temperature, High-Humidity Operation	T=40° C, RH=80%, 240h
6	High Temperature, High Humidity Storage	T=50° C, RH=90%, 240h Test in white pattern
7	Temperature Cycle	1 cycle:[-25°C 30min]→[+60°C 30 min] : 50 cycles Test in white pattern
8	UV exposure Resistance	765W/m ² for 168hrs,40 °C Test in white pattern
9	ESD Gun	Air+/-15KV;Contact+/-8KV (Test finished product shell, not display only) Air+/-8KV;Contact+/-6KV (Naked EPD display, no including IC and FPC area) Air+/-4KV;Contact+/-2KV (Naked EPD display, including IC and FPC area)

Note: Put in normal temperature for 1hour after test finished, display performance is ok.

11. Matched Development Kit


Our Development Kit designed for SPI E-paper Display aims to help users to learn how to use E-paper Display more easily. It can refresh black-white E-paper Display, three-color (black, white and red/Yellow) E-paper Display and four-color (black, white, red and yellow) YOURITECH's E-paper Display. And it is also added the functions of USB serial port, FLASH chip, font chip, current detection etc. Development Kit consists of the development board and the pinboard.

Supported development platforms include STM32, ESP32, ESP8266, Arduino UNO, etc.

12. Inspection method and condition

12. 1 Inspection condition

Item	Condition
Illuminance	800~1500 lux
Temperature	22℃ ± 3℃
Humidity	55 ± 10 %RH
Distance	≥30cm
Angle	Vertical fore and aft 45
Inspection method	By eyes

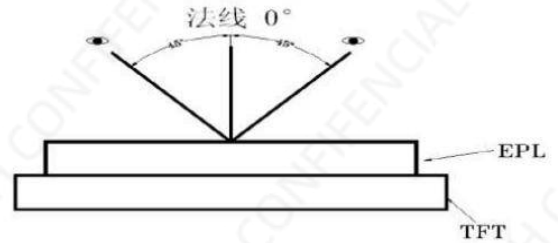


12. 2 Zone definition

A Zone: Active area


B Zone: Border zone


C Zone: From B zone edge to panel edge






12. 3 General inspection standards for products

12.3.1 Appearance inspection standard

Inspection item	Figure	A zone inspection standard	B/C zone	Inspection method	MAJ/ MIN
Spot defects	Diameter $D=(L+W)/2$ (L-length, W-width) Measuring method shown in the figure below  $D = (L + W) / 2$ The distance between the two spots should not be less than 10mm	7.5"-13.3"Module (Not include 7.5") : $D > 1\text{mm}$ $N=0$ $0.5 < D \leq 0.8$ $N \leq 4$ $D \leq 0.5$ Ignore $0.8 < D \leq 1$ $N \leq 2$ 4.2"-7.5"Module (Not include 4.2") : $D > 0.5$ $N=0$ $0.4 < D \leq 0.5$ $N \leq 2$ $D \leq 0.25$ Ignore $0.25 < D \leq 0.4$ $N \leq 4$ Module below 4.2" : $D > 0.5$ $N=0$ $0.4 < D \leq 0.5$ $N \leq 1$ $D \leq 0.25$ Ignore $0.25 < D \leq 0.4$ $N \leq 4$ $0.1\text{mm} < D \leq 0.25$ $N \leq 3/\text{cm}^2$	Foreign matter $D \leq 1\text{mm}$ Pass	Check by eyes Film gauge	MIN

Inspection item	Figure	A zone inspection standard	B/C zone	Inspection method	MA J/ MI N
Line defects	L-Length, W-Width, $(W/L) < 1/4$ Judged by line, $(W/L) \geq 1/4$ Judged by dot  The distance between the two lines should not be less than 5mm	7.5"-13.3"Module (Not include 7.5") : $L > 10\text{mm}, N=0$ $W > 0.8\text{mm}, N=0$ $5\text{mm} \leq L \leq 10\text{mm}, 0.5\text{mm} \leq W \leq 0.8\text{mm}$ $N \leq 2$ $L \leq 5\text{mm}, W \leq 0.5\text{mm}$ Ignore 4.2"-7.5"Module (Not include 4.2") : $L > 8\text{mm}, N=0$ $W > 0.2\text{mm}, N=0$ $2\text{mm} \leq L \leq 8\text{mm}, 0.1\text{mm} \leq W \leq 0.2\text{mm}$ $N \leq 4$ $L \leq 2\text{mm}, W \leq 0.1\text{mm}$ Ignore Module below 4.2" : $L > 5\text{mm}, N=0$ $W > 0.2\text{mm}, N=0$ $2\text{mm} \leq L \leq 5\text{mm}, 0.1\text{mm} \leq W \leq 0.2\text{mm}$ $N \leq 4$ $L \leq 2\text{mm}, W \leq 0.1\text{mm}$ Ignore	Ignore	Check by eyes Film gauge	MIN

Inspection item		Figure	Inspection standard	Inspection method	MA J/ MIN
Panel chipping and crack defects	TFT panel chipping	X the length, Y the width, Z the chipping height, T the thickness of the panel 崩角  崩边 	Chipping at the edge: Module over 7.5" (Include 7.5") : $X \leq 6\text{mm}, Y \leq 1\text{mm}$ $Z \leq T$ $N=3$ Allowed Module below 7.5"(Not include 7.5"): $X \leq 3\text{mm}, Y \leq 1\text{mm}$ $Z \leq T$ $N=3$ Allowed Chipping on the corner: IC side$X \leq 2\text{mm}$ $Y \leq 2\text{mm}$, Non-IC side$X \leq 1\text{mm}$ $Y \leq 1\text{mm}$. Allowed Note: Chipping should not damage the edge wiring. If it does not affect the display, allowed	Check by eyes、 Film gauge	MIN
	Crack	玻璃裂纹 	Crack at any zone of glass , Not allowed	Check by eyes、 Film gauge	MIN
	Burr edge		No exceed the positive and negative deviation of the outline dimensions $X+Y \leq 0.2\text{mm}$ Allowed	Calliper	MIN
	Curl of panel	 Curl height	Curl height $H \leq \text{Total panel length } 1\%$ Allowed	Check by eyes	MIN

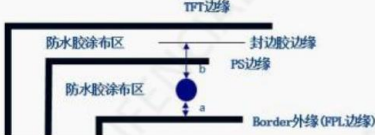Inspection item		Figure	Inspection standard	Inspection method	MAJ / MIN
PS defect	Water proof film		1. Waterproof film damage, wrinkled, open edge, not allowed 2. Exceeding the edge of module (according to the lamination drawing) Not allowed 3. Edge warped exceeds height of technical file, not allowed	Check by eyes	MIN
RTV defect	Adhesive effect		Adhesive height exceeds the display surface, not allowed 1. Overflow, exceeds the panel side edge, affecting the size, not allowed 2. No adhesive at panel edge $\leq 1\text{mm}$, no exposure of wiring, allowed 3. No adhesive at edge and corner $1*1\text{mm}$, no exposure of wiring, allowed Protection adhesive, coverage width within $W \leq 1.5\text{mm}$, no break of adhesive, allowed	Check by eyes	MIN
	Adhesive re-fill		Dispensing is uniform, without obvious concave and breaking, bubbling and swell, not higher than the upper surface of the PS, and the diameter of the adhesive re-filling is not more than 8mm, allowed	Check by eyes	MIN
EC defect	Adhesive bubble		1. Effective edge sealing area of hot melt products $\geq 1/2$ edge sealing area; 2. Bubble $a+b \geq 1/2$ effective width, $N \leq 3$, spacing $\geq 5\text{mm}$, allowed No exposure of wiring, allowed	Check by eyes	MIN

Inspection item		Figure	Inspection standard	Inspection method	MAJ/ MIN
EC defect	Adhesive effect		1. Overflow, exceeds the panel side edge, affecting the size, not allowed 2. No adhesive at panel edge $\leq 1\text{mm}$, no exposure of wiring, allowed 3. No adhesive at edge and corner $1*1\text{mm}$, no exposure of wiring, allowed 4. Adhesive height exceeds the display surface, not allowed	Visual, caliper	MIN
Silver dot adhesive defect	Silver dot adhesive		1. Single silver dot dispensing amount $\geq 1\text{mm}$, allowed 2. One of the double silver dot dispensing amount is $\geq 1\text{mm}$ and the other has adhesive (no reference to 1mm) Allowed	Visual	MIN
			Silver dot dispensing residue on the panel $\leq 0.2\text{mm}$, allowed	Film gauge	MIN
FPC defect	FPC wiring		FPC, TCP damage / gold finger peroxidation, adhesive residue, not allowed	Visual	MIJ
	FPC golden finger		The height of burr edge of TCP punching surface $\cong 0.4\text{mm}$, not allowed	Caliper	MIN
	FPC damage/crease		Damage and breaking, not allowed Crease does not affect the electrical performance display, allowed	Check by eyes	MIN

Inspection item		Figure	Inspection standard	Inspection method	MAJ/ MIN
Protective film defect	Protective film	Scratch and crease on the surface but no affect to protection function, allowed		Check by eyes	MIN
		Adhesive at edge $L \leq 5\text{mm}$, $W \leq 0.5\text{mm}$, $N=2$, no entering into viewing area		Check by eyes	MIN
Stain defect	Stain	If stain can be normally wiped clean by $> 99\%$ alcohol, allowed		Visual	MIN
Pull tab defect	Pull tab	The position and direction meet the document requirements, and ensure that the protective film can be pulled off.		Check by eyes/ Manual pulling	MIN
Shading tape defect	Shading tape	Tilt $\leq 10^\circ$, flat without warping, completely covering the IC.		Check by eyes/ Film gauge	MIN
Stiffener	Stiffener	Flat without warping, Exceeding the left and right edges of the FPC is not allowed. Left and right can be less than 0.5mm from FPC edge		Check by eyes	MIN
Label	Label/ Spraying code	The content meets the requirements of the work sheet. The attaching position meets the requirements of the technical documents.		Check by eyes	MIN

13. Handling, Safety and Environmental Requirements

WARNING
The display glass may break when it is dropped or bumped on a hard surface. Handle with care. Should the display break, do not touch the electrophoretic material. In case of contact with electrophoretic material, wash with water and soap.

CAUTION
The display module should not be exposed to harmful gases, such as acid and alkali gases, which corrode electronic components.
Disassembling the display module can cause permanent damage and invalidate the warranty agreements.

Observe general precautions that are common to handling delicate electronic components. The glass can break and front surfaces can easily be damaged. Moreover the display is sensitive to static electricity and other rough environmental conditions.

Data sheet status	
Product specification	The data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

Product Environmental certification
RoHS

14. Precautions

- (1) Do not apply pressure to the EPD panel in order to prevent damaging it.
- (2) Do not connect or disconnect the interface connector while the EPD panel is in operation.
- (3) Do not touch IC bonding area. It may scratch TFT lead or damage IC function.
- (4) Please be mindful of moisture to avoid its penetration into the EPD panel, which may cause damage during operation.
- (5) If the EPD Panel / Module is not refreshed every 24 hours, a phenomena known as "Ghosting" or "Image Sticking" may occur. It is recommended to refresh the ESL / EPD Tag every 24 hours in use case. It is recommended that customer ships or stores the ESL / EPD Tag with a completely white image to avoid this issue
- (6) High temperature, high humidity, sunlight or fluorescent light may degrade the EPD panel's performance. Please do not expose the unprotected EPD panel to high temperature, high humidity, sunlight, or fluorescent for long periods of time.