

INDUSTRIAL STRENGTH... Start Your Application From **YOURITECH**

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Production Custom designs Installation

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Optical Bonding

Cover glass

System solutions

OEM Solutions

Custom Display

Mechanical design



PRODUCT SPECIFICATION

Customer	
Project	
Part No.	ET104WU01-ZT
Remarks	☐ APPOVAL FOR SPECIFICATION ONLY ☒ APPOVAL FOR SPECIFICATION AND SAMPLE

CUSTOMER			YOURITECH		
Approved By	Checked By	Prepared By	Approved By	Checked By	Prepared By



Revision Record

Rev. No.	Date	Description
V1.0	2022-06-10	Preliminary Specification Release.

Contents

1. General Specifications	3
2. Interface Definition Description	4
3. Mechanical Drawing	5
4. Electrical Specifications	7
5. Delivery Inspection	11
6. Reliability Test	13
7. Precautions	14
8. Storage	16



1. General Specifications

No.	Item	Specification	Unit
1	Display Size (Diagonal)	10.36	inch
2	Display Resolution	1200(H) × RGB × 2000 (V)	pixels
3	Pixel Pitch	37.6(H) × 112.8 (V)	um
4	LCM Outline Dimension (Without FPC)	140.36 (W) × 234.63 (H) × 2.1 (T)	mm
5	LCD Outline Dimension	139.36 (W) × 233.30 (H) × 0.6 (T)	mm
6	LENS Outline Dimension (Without FPC)	159.20 (W) × 244.90 (H) × 2.85 (T)	mm
7	LCD Active Area	135.36 (W) × 225.60 (H)	mm
8	View Direction (Gray Inversion)	FULL VIEW	-
9	Driver IC	NT36523	-
10	Pixel Arrangement	RGB-Stripe	-
11	Display Mode	Normal Black	-
12	Pixel driving Element	a-Si TFT	-
13	LCD Transmittance	Typ.: 4.20% Min:3.55%	-
14	LCD Contrast Ratio	Typ.: 1300 Min:1000	-
15	FPC Version	Z101028-P40H V3	-
16	Interface	MIPI	-
17	TP Interface	I2C	-
18	Operating Temperature	-10°C~ 60°C	-
19	Storage Temperature	-20°C~ 70°C	-
20	Backlight Arrangement	LED/9 Series 4 Parallel (36 lights in total)	-
21	Luminance	350	nit
22	Weight	0.201	kg



2. Interface Definition Description

2.1 LCM PIN

PIN NO.	PIN DEF.	FUNCTION DESC.
1-2	LEDA	POWER SUPPLY- FOR BACKLIGHT ANODE
3-6	LEDK	POWER SUPPLY- FOR BACKLIGHT CATHODE
7	NC	No Connection
8	LCD_RESET	LCM RESET PIN
9	LCD_ID2	LCD ID PIN(If not use,please NC)
10	LCD_ID1	LCD ID PIN(If not use,please NC)
11	LCD_IOVCC	LCM POWER SUPPLY
12	TP_IOVCC	TP POWER SUPPLY (1.8V)
13	NC	No Connection
14	VSP	Positive POWER SUPPLY
15	VSN	Negative POWER SUPPLY
16	D3P	Positive MIPI differential data input
17	D3N	Negative MIPI differential data input
18	GND	Ground
19	D2P	Positive MIPI differential data input
20	D2N	Negative MIPI differential data input
21	GND	Ground
22	CLKP	Positive MIPI differential CLOCK input
23	CLKN	Negative MIPI differential CLOCK input
24	GND	Ground
25	D1P	Positive MIPI differential data input
26	D1N	Negative MIPI differential data input
27	GND	Ground
28	D0P	Positive MIPI differential data input
29	D0N	Negative MIPI differential data input
30	GND	Ground

LCD_RESET voltage should be consistent with LCD_IOVCC voltage, or there probably is black screen fault when power on.

2.2 TP PIN

PIN NO.	PIN DEF.	FUNCTION DESC.
1-3	NC	No Connection
4	TP_I2C_SDA	TP I2C data (SDA) data input (MOSI)(1.8V)
5	TP_I2C_SCL	TP I2C clock (SCL) clock (SCLK)(1.8V)
6-7	GND	Ground
8	TP_RESET	TP Reset PIN
9	TP_INT	TP Interrupt PIN
10	GND	Ground



4. Electrical Specifications

4.1. LCD Optical Characteristics

Item		Symbol	Conditions	Specification			Unit	Note
				Min.	Typ.	Max.		
Transmittance (With PL)		T(%)	Viewing normal angle $x = y = 0$	3.55	4.20	-	%	-
Contrast Ratio		CR		1000	1300	-	-	-
Response Time		TR+TF		-	30	35	ms	-
Viewing Angle	Hor.	Θ_{x+}	$CR \geq 10$ at 25°C	75	80	-	deg.	-
		Θ_{x-}		75	80	-		
	Ver.	Θ_{y+}		75	80	-		
		Θ_{y-}		75	80	-		

4.2. Electrical Specifications

Item	Symbol	Specification			Unit
		Min.	Typ.	Max.	
Positive Analog Operating voltage	VSP	4.5	5.5	6.3	V
Negative Analog Operating voltage	VSN	-6.3	-5.5	-4.5	V
TFT Gate On Voltage	VGH	13	14	15	V
TFT Gate Off Voltage	VGL	-15	-14	-13	V
TFT Common Electrode Voltage	Vcom	-1.5	-1.0	-0.5	V

4.3. Typical Operating Conditions

Item	Symbol	Min.	Typ.	Max.	Unit
I/O Supply Voltage	LCD_IOVCC	1.65	1.8	1.95	V
Input High Voltage	VIH	$0.7 \times \text{LCD_IOVCC}$	-	LCD_IOVCC	V
Input Low Voltage	VIL	GND	-	$0.3 \times \text{LCD_IOVCC}$	V



Output High Voltage	VOH	$0.8 \times \text{LCD_IOVCC}$	-	LCD_IOVCC	V
Output Low Voltage	VOL	GND	-	$0.2 \times \text{LCD_IOVCC}$	V

4.4. Backlight Circuit Specifications

Item	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Current	I _B	-	80	-	mA	-
Voltage	V _f	24	25	29.7	V	-
LCM Uniformity	-	80	-	-	%	If=80mA
Life Time	-	30000	-	-	Hr.	
Power Consumption	PBL	-	2000	-	mW	
TLCM Chromaticity Coordinate	Red	R _x	0.652	0.667	0.682	Average the brightness EV at 9 points, Optical Instrument BM-7
		R _y	0.299	0.314	0.329	
	Green	G _x	0.242	0.257	0.272	
		G _y	0.562	0.577	0.592	
	Blue	B _x	0.125	0.140	0.155	
		B _y	0.059	0.074	0.089	
	White	W _x	0.268	0.283	0.298	
		W _y	0.283	0.298	0.313	

4.5. LCD Power Consumption


Mode	Symbol	Typ.	Max.	Unit
Normal Mode	VCC+LCD_IOVCC	-	-	mA
Test Condition: VCC=3.3V.				
Interface Drive Type: row flipping or column flipping.				
IPS Type LCD Panel => All Black Pattern.				
TN Type LCD Panel => All White Pattern.				
Temperature: 25°C.				
Mode	Symbol	Typ.	Max.	Unit



Sleep Mode	VCC+LCD_IOVCC	-	-	μA
Test Condition: VCC=3.3V.				
DC/DC converter is enabled. Internal oscillator is started and panel scanning is started.				
Except for the IC internal crystal oscillator and panel scanning, other functions are suspended.				
Temperature: 25°C.				


4.6. Measuring System

4.6.1. LCM Viewing Angle

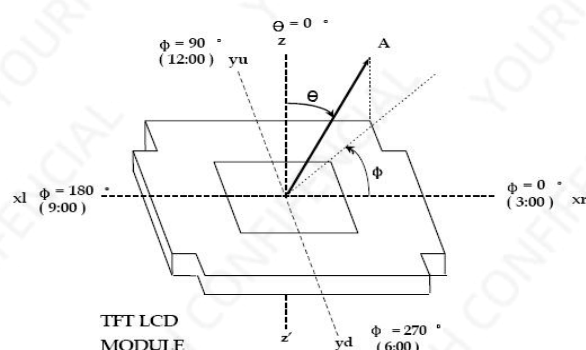

Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface.

4.6.2. Response Time

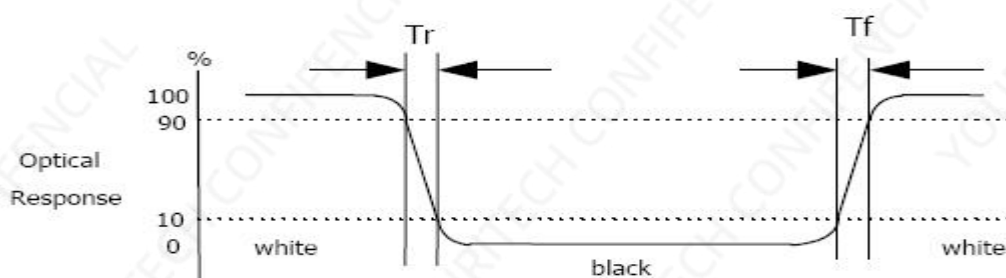

Response time is the time required for the display to transition from white to black (Rising time, T_r) and from black to white (Falling time, T_f) for additional information.

4.6.3. Contrast Ratio (CR)

Contrast Ratio (CR) is defined mathematically as:


$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

Surface luminance is the center point across the LCD surface 500mm from the surface with all pixels displaying white.



4.7. Power On / Power Off

4.7.1. Power On

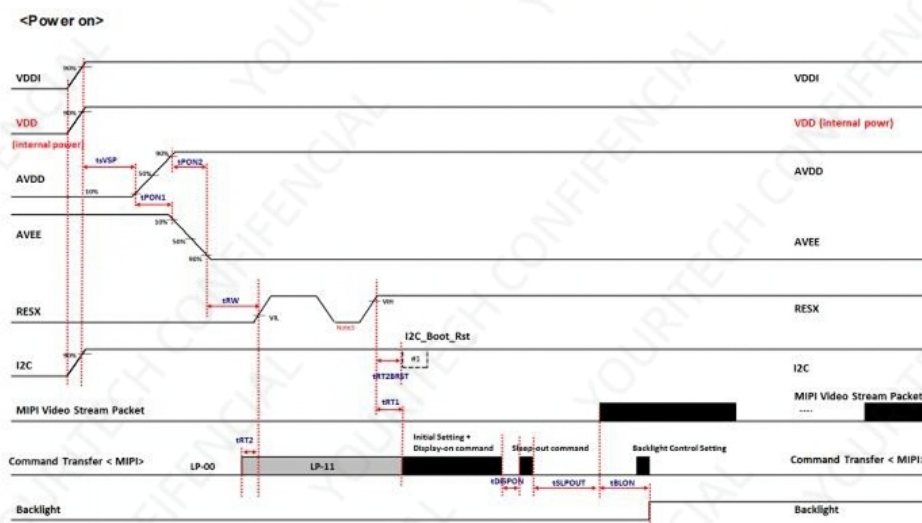

Note 1: After Sleep-Out Command, Driver IC will reload MTP registers and do internal power on action.

Therefore, any initial settings (such as 3Ah, 3Bh, etc.) by MIPI should be set after

Sleep-Out command with minimum delay time 100mS.

Note 2: For detailed panel-related power sequence, please refer to NT 36526 Application Notes.

Note 3: Two finger Reset is necessary.

Note 4: For flash download / initial code / gamma function please keep tRT1 time larger than 90ms after RESX = H.

Note 5: I2C Wake Up Gesture CMD = 0x13 ; I2C Power Down CMD = 0x11


Note 6: MIPI sleep out = 0x11 ; sleep in = 0x10 ; display on = 0x29 ; display off = 0x28

Note 7: Touch power down CMD. It's optional.

Note 8: #1 I2C_Boot_RST is optional.

4.7.2. Power Off


<Power off>

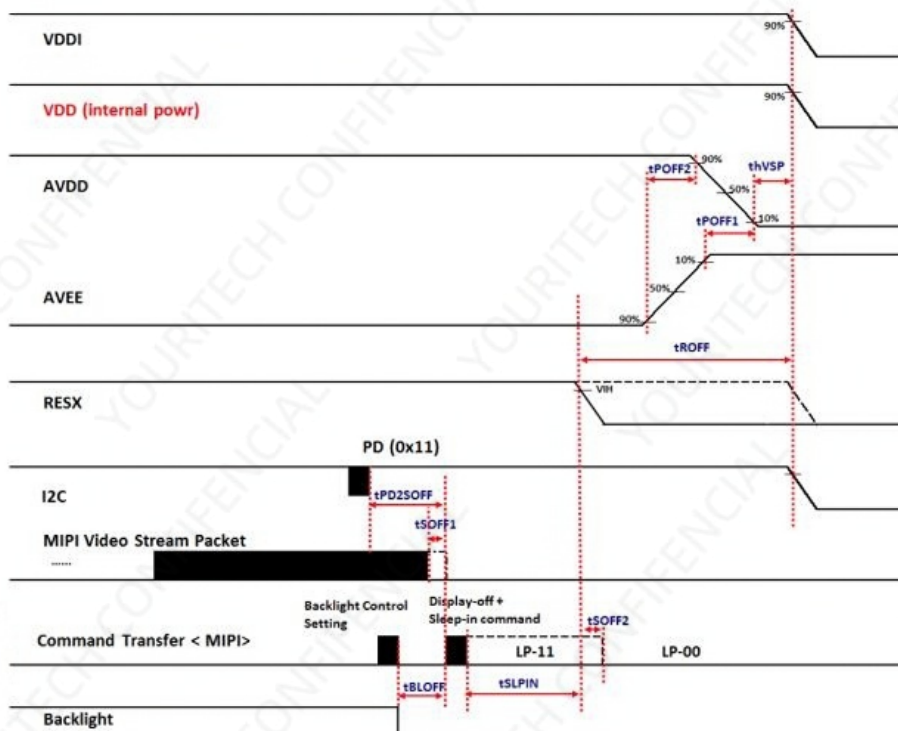

5. Delivery Inspection

5.1. Quality Inspection Environmental Conditions

- 5.1.1. Viewing distance: the normal viewing distance between the screen and the inspector is $30\pm 5\text{cm}$; Inspection Angle: $90^\circ\pm 45^\circ$ (90° indicates that the inspector's perspective is perpendicular to the product to be inspected).
- 5.1.2. Visual inspection illumination: $1000\pm 200\text{LUX}$; Electrical inspection illumination: $200\pm 100\text{LUX}$; Ambient temperature $25\pm 5^\circ\text{C}$, ambient humidity $55\pm 15\%\text{RH}$.

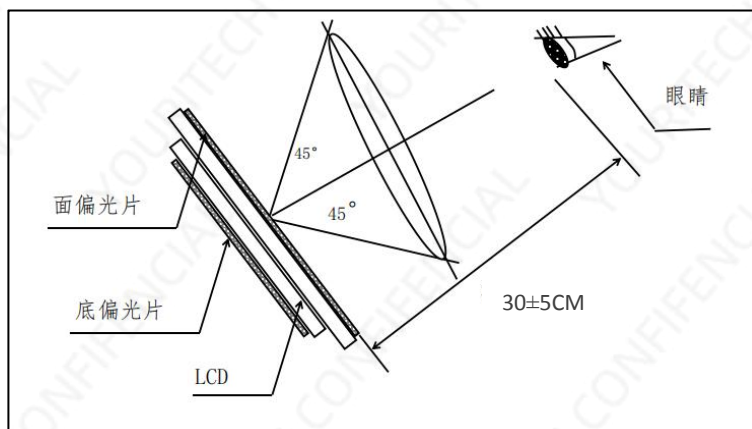

5.2. Quality Inspection Standard

No.	Defect	Standard		Defect Grade	Result
1	Spot Defect (including bright spot / color spot / bubble / dark spot, etc.)	< 7 inches	$\Phi \leq 0.10\text{mm}$	Ignore	OK
			$0.10\text{mm} < \Phi \leq 0.20\text{mm}$ $\text{DS} \geq 10\text{mm}$	Minor Defect	OK
			$\Phi > 0.20\text{mm}$	Serious Defect	NG
		≥ 7 inches	$\Phi \leq 0.15\text{mm}$	Ignore	OK
			$0.15\text{mm} < \Phi \leq 0.25\text{mm}$ $\text{DS} \geq 10\text{mm}$	Minor Defect	OK
			$\Phi > 0.25\text{mm}$	Serious Defect	NG
		Φ : defect diameter. DS: spacing.			
2	Linear Defect (scratches,	< 7 inches	$W \leq 0.02\text{mm}$, L: unlimited	Ignore	OK



	filaments, etc.)		0.02mm < W ≤ 0.03mm L ≤ 5mm		Minor Defect	OK
			W > 0.03mm		Serious Defect	NG
		≧ 7 inches	W ≤ 0.03mm L: unlimited		Ignore	OK
			0.03mm < W ≤ 0.05mm L ≤ 5mm		Minor Defect	OK
			W > 0.05mm		Serious Defect	NG
		W: defect width. L: defect length. DS: spacing.				
3	Polarizer Bubble	Display Area	Judge by Spot Defect			
		Black Edge Area	The distance from the edge of the display area is greater than 0.5mm.		Minor defect	OK
			The distance from the edge of the display area is less than 0.5mm.		Judge by Spot Defect	
4	Polarizer Bump (Mark)	Display Area / Black Edge Area	Invisible when the touch screen or cover plate is assembled.		Minor Defect	OK
5	Color and Luminance	Item	Method	Instrument	Median	Tolerance Range
		Color	x, y Color Coordinate	Optical Instrument BM-7	According to the actual test on the sample confirmed by the customer.	± 0.04
		Luminance	Average the brightness EV at 9 points	Optical Instrument BM-7	According to the actual test on the sample confirmed by the customer.	± 20%
6	Other Standards	Subject to the negotiation by both parties.				



7	Warranty Period	One year after sale.
8	Guarantee	ROHS、REACH
9	Websites	

6. Reliability Test

Item	Condition	Result Determination
High-Temperature Storage	70°C 120H	After the test, leave the LCD samples indoors at normal temperature and humidity for 2H for function and appearance inspection. The sample should meet the requirements on electrical performance, but be free from the following defects: 1. Air bubble in the module, 2. No display, 3. Glass crack.
Low-Temperature Storage	-20°C 120H	
High-Temperature Operation	60°C 120H	
Low-Temperature Operation	-10°C 120H	
High-Temperature and High-Humidity	60°C 90%RH 120H	
Thermal Cycling Test	-10°C/0.5H ~ +60°C/0.5H 100 cycles in total	
Vibration Test	Frequency: 10Hz ~ 55Hz ~ 10Hz Amplitude: 0.75mm Cycle once a minute, 30 cycles in total (Packing Condition)	
ESD Test	±4kV Human Body Mode 150pF/330Ω ±8kV Air Mode 150pF/330Ω	

Note:

- 1) Each module under test can only be used for one of the test items.
- 2) The quantity of samples for each test item is 2.
- 3) Fault Judgment Criterion: Basic Specifications, Electrical Specifications, Mechanical Specifications, Optical Specifications.



7. Precautions

- 7.1. The display screen consists of glass and polarizer. Since the glass is fragile, the user must pay special attention to the edge area, and protect it from falling, vibration, or mechanical impact.
- 7.2. If the display screen is damaged and the liquid crystal material leaks, be sure not to get any in the mouth. If the liquid crystal material contacts the skin or clothes, flush off with soap and water.
- 7.3. Do not apply excessive force to the display screen or the joint part, or the color will change. Do not touch the display screen with bare hands, which will stain the display area and degraded insulation between terminals (some of the appearance is determined by the polarizer).
- 7.4. The polarizer covering the display panel of the LCD module is soft and easy to be scratched, be sure to handle carefully. Do not touch, impact, press, or rub the exposed polarizers with anything harder than an HB pencil lead (e.g.: glass, tweezers, etc.). Do not place or attach anything onto the display area to avoid leaving marks. The condensed material on the surface or terminals due to cold will damage or stain the polarizer. After the test in low temperature environment, the product must be warmed up in a container before put into the room temperature environment.
- 7.5. If the display panel is stained, blow warm air onto the surface and gently wipe it with a soft and dry cloth. If it is seriously contaminated, wipe it with a wet cloth dipped in one of the following solvents:
- glycerol
 - ethyl Alcohol
- Do not scrub, and avoid damaging the display panel.
- 7.6. Solvents other than those mentioned above may damage the polarizer. In particular, never use any of the following solvents:
- water
 - ketone
 - arene
- Wipe off saliva or water drop immediately, the contact with water over a long period of time may cause deformation or color fading. Avoid contact with oil or grease.
- 7.7. Special note: minimize electrode corrosion. Because electrode corrosion can be accelerated by water droplets, condensation of humidity, or electrification in a high humidity environment.
- 7.8. Assemble the LCD Module by the mounting holes. Make sure the LCD module make sure there is no bending, distortion, or deformation. Do not forcibly pull or bend the transmission wire or the backlight wire.



- 7.9. Do not disassemble the LCD module.
- 7.10. NC terminal should be disconnected. Do not connect any device.
- 7.11. If the logic circuit power supply is off, do not send the input signal.
- 7.12. Since the LCD module is integrated with CMOS, pay special attention to the modules. To prevent electrostatic damage, be careful to maintain a suitable work environment.
- Make sure the module has the same potential as the human body before take the LCD module out of the packing box for assembly. The reliable grounding is necessary during module processing.
 - The required tool, such as the electric soldering iron, must be reliably grounded. Make sure it is connected to AC power supply, and no electric leakage. When fixing the module with electric screwdriver, it must be grounded, to reduce the electromagnetic wave generated by the electric commutator spark as much as possible.
 - Do not assemble or operate under dry condition to reduce the static electricity. To reduce static electricity, the workplace must not be too dry. The recommended relative humidity is 50 - 60%. Keep your work clothes and work table grounded as much as possible
 - The LCD module is coated with a film to protect the display surface. Be careful when peeling off the film to reduce the generated static electricity.
- 7.13. Since the LCD module has high precision assembly and regulation, try to avoid excessive impact on the module or making any changes:
- Do not change the shape of the tab on the metal frame.
 - Do not drill any extra hole, modify the shape, or change the position of component on the printed circuit board.
 - Do not change or damage the pattern on the printed circuit board.
 - Never modify the zebra strip (conductive rubber) or heat seal connector.
 - Do not make any change with the electric soldering iron except for the joint.
 - Do not throw, bend or twist.

8. Storage

8.1. Storage Method

Store in an ambient temperature of $23\pm5^{\circ}\text{C}$, and in a relative humidity of $60\pm15\%$. The storage period should not exceed 12 months. Do not expose to the sun for a long period of time.

8.1.1. Store in clean environment, free from dust, active gas, or solvent.

8.1.2. Store in anti-static environment.

