

INDUSTRIAL STRENGTH... Start Your Application From **YOURITECH**

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Optical Bonding

Cover glass

System solutions

OEM Solutions

Custom Display

Production
Custom designs
Installation

Mechanical design



SPECIFICATION FOR APPROVAL

() Preliminary Specification
 (●) Final Specification

TITLE	31.5" UHD TFT LCD
-------	-------------------

BUYER	
MODEL	

SUPPLIER	LG Display Co., Ltd.
MODEL	LB315WR6
SUFFIX	SSZ1

*When you obtain standard approval,
 please use the above model name without suffix

APPROVED BY	SIGNATURE DATE
/	
/	
/	

Please return 1 copy for your confirmation
 with your signature and comments.

APPROVED BY	SIGNATURE DATE
REVIEWED BY	
PREPARED BY	

Product engineering dept.
LG Display Co., Ltd

Product Specification

Contents

No.	Item	Page
	Cover	1
	Contents	2
	Record of Revisions	3
1	General Description	4
2	Absolute Maximum Ratings	5
3	Electrical Specifications	6
3-1	Electrical Characteristics	6
3-2	Interface Connections	9
3-3	Signal Timing Specifications	16
3-4	Signal Timing Waveforms	17
3-5	Color Data Reference	18
3-6	Power Sequence	19
3-7	Power Dip Condition	20
4	Optical Specifications	21
5	Mechanical Characteristics	25
6	Reliability	28
7	International Standards	29
7-1	Safety	29
7-2	Environment	29
8	Packing	30
8-1	Designation of Lot Mark	30
8-2	Packing Form	31
9	Precautions	32
9-1	Mounting Precautions	32
9-2	Operating Precautions	32
9-3	Electrostatic Discharge Control	33
9-4	Precautions For Strong Light Exposure	33
9-5	Storage	33
9-6	Handling Precautions For Protection Film	33

Product Specification

Record of Revisions

Revision No	Revision Date	Page	Before	After	Application Date
0.1	May., 20, 2022	-	First Draft(Preliminary)		
0.2	Sep., 7, 2022	4,8	LED String Current: typ. (79)mA LED String Voltage: typ. (27.8)V Power Consumption: typ. (65.9)W	LED String Current: typ. 77mA LED String Voltage: typ. 28.6V Power Consumption: typ. 66.1W	
1.0	Nov. 28. 2022			Final Release	

Approved by LGD

Product Specification

1. General Description

LM315WR6 is a color active matrix liquid crystal display with a Light Emitting Diode(LED) backlight assembly without LED driver. The matrix employs a-Si thin film transistor as the active element. It is a transmissive type display operating in the normally black mode. It has a 31.5 inch diagonally measured active display area with UHD resolution(3840 horizontal by 2160 vertical pixel array). Each pixel is divided into red, green and blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 10-bit gray scale signal for each dot, thus, presenting a palette of more than 1.07 Billion colors with A-FRC (Advanced Frame Rate Control). It has been designed to apply eDP(HBR2, 5.4Gbps) interface. It is intended to support displays where high brightness, super wide viewing angle, high color saturation, and high color are important.

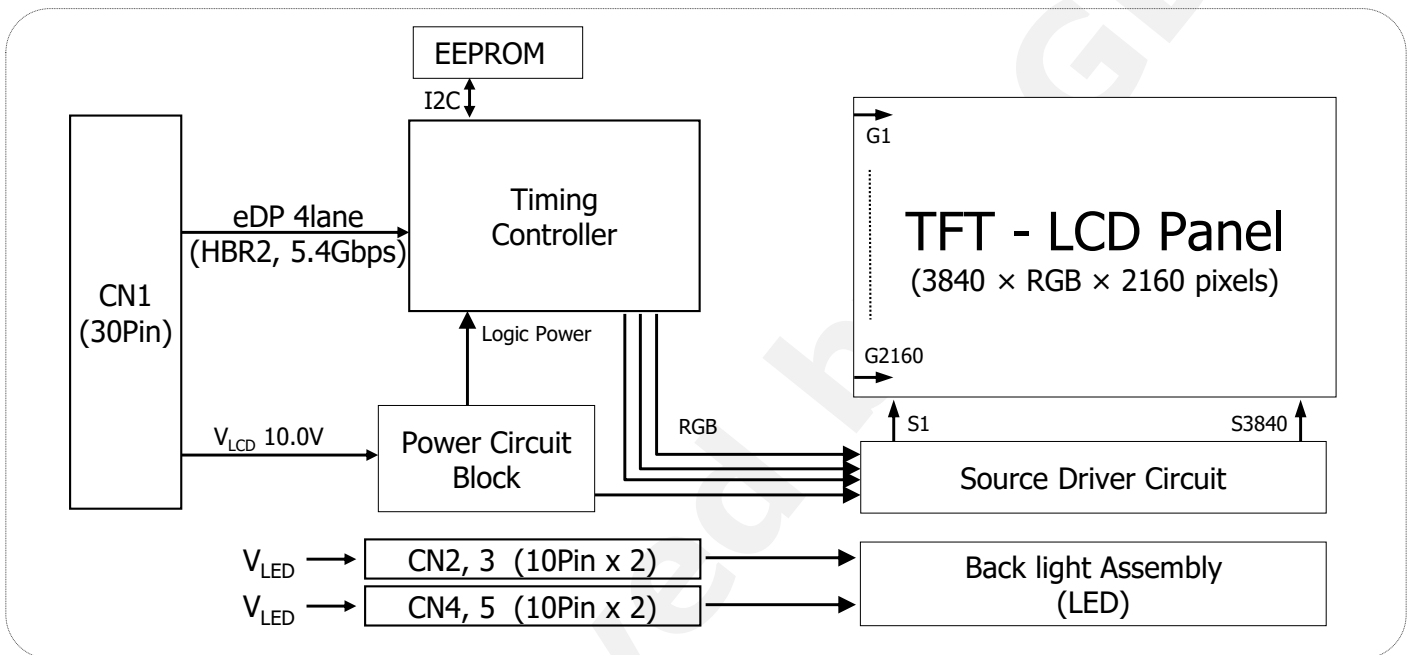


FIG.1 Block Diagram

General Features

Active Screen Size	31.5 inches(80.0051cm) (Aspect ratio 16:9)
Outline Dimension	730.70[H] x 425.20[V] x 22.20[D] (Typ.)
Pixel Pitch	0.18159(H)mm x 0.18159(V)mm
Pixel Format	3840(H) x 2160(V) Pixels. RGB stripes arrangement.
Color Depth	1.07 Billion colors, 10 Bit(8 Bit + A-FRC)
Luminance, White	1000 cd/m ² (Center 1Point, Typ.)
Viewing Angle(CR>10)	R/L 178° (Typ.), U/D 178° (Typ.)
Power Consumption	Total 70.9 Watt (Typ.)(4.8Watt@ Mosaic_V _{LCD} , 66.1 Watt@ Is = 77 mA)
Weight	5,900g (Typ.)
Display Operating Mode	Transmissive mode, Normally black
Panel type	Reverse type
BLU Type	Edge Type
Surface Treatment	Anti-Glare treatment of the front polarizer(Haze25%, 3H)

Product Specification

2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 2-1. Absolute Maximum Ratings

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Supply Input Voltage	V_{LCD}	-0.3	+12.0	V_{DC}	At 25°C
Operating Temperature	T_{OP}	0	50	°C	1,2,3
Storage Temperature	T_{ST}	-20	60	°C	
Operating Ambient Humidity	H_{OP}	10	90	%RH	
Storage Humidity	H_{ST}	10	90	%RH	
Glass Surface Temperature(Operation)	$T_{surface}$	0	48	°C	1,4

Notes:

- 1) Temperature and relative humidity range are shown in the figure below.
Wet bulb temperature should be 39°C Max, and no condensation of water.
- 2) Maximum storage humidity is up to 40°C, 70% RH only for 4 corner light leakage mura.
- 3) Storage condition is guaranteed under packing condition.
- 4) Glass surface temperature should be measured under the condition of $V_{LCD} = \text{Typ}$, $f_V = 60\text{Hz}$, $T_a = 25^\circ\text{C}$, no humidity and typical LED string current.

* f_V = Frame frequency
 * T_a = Ambient temperature

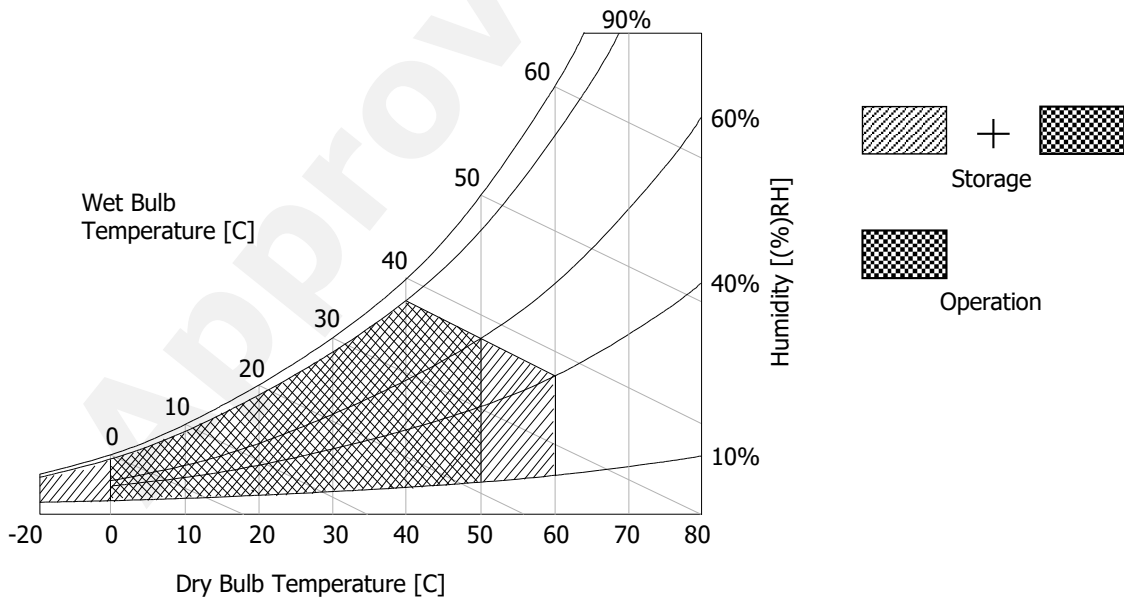


FIG.2 Temperature And Relative Humidity

Product Specification

3. Electrical Specifications

3-1. Electrical Characteristics

It requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The other input power for the LED/Backlight, is typically generated by a LED Driver. The LED Driver is an external unit to the LCDs.

Table 3-1. Electrical Characteristics


Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
Module:						
Power Supply Input voltage	V _{LCD}	9.5	10.0	10.5	Vdc	4
Permissive Power Input Ripple	V _{RIPPLE}	-		400	mVp-p	1
Power Supply Input Current	I _{LCD} Typ.	-	480	600	mA	2 (Non-fix)
	I _{LCD} Max.	-	1270	1580	mA	
Power Consumption	P _{LCD} Typ.	-	4.8	6.0	Watt	
	P _{LCD} Max.		12.7	15.8	Watt	
Rush Current	I _{RUSH}	-	-	4.0	A	3

Notes:

- 1) Permissive power ripple should be measured under the condition of $V_{LCD} = \text{Typ}$, $25 \pm 2^\circ\text{C}$, $f_v = \text{Max}$.
Refer to page 7 for the pattern and more information.
- 2) The specified current and power consumption can be measured under the $V_{LCD} = \text{Typ}$, $25 \pm 2^\circ\text{C}$, $f_v = 60\text{Hz}$ and the pattern should be changed according to the typical or maximum power condition.
The max. current can be measured only with the maximum power pattern. See the page 7 for details.
- 3) Maximum condition of inrush current:
The duration of rush current is about 5ms and rising time of power input is $500\mu\text{s} \pm 20\%$.(Min).
- 4) V_{LCD} level must be measured between two points on PCB of LCM $V_{LCD}(\text{test point}) \sim \text{LCM Ground}$.
(Test condition: Maximum power pattern, 25°C , $f_v = 60\text{Hz}$)

* f_v = Frame frequency


- **Permissive Power Input Ripple**($V_{LCD} = \text{Typ}$, 25°C , $f_v(\text{frame frequency}) = \text{Max condition}$)

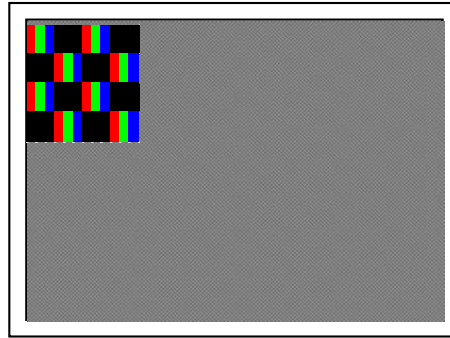


1dot Pattern

For the exact ripple measurement, the condition of Max 20MHz is recommended in the bandwidth configuration of oscilloscope.

- **Power Consumption**($V_{LCD} = \text{Typ}$, 25°C , $f_v(\text{frame frequency}) = 60\text{Hz condition}$)

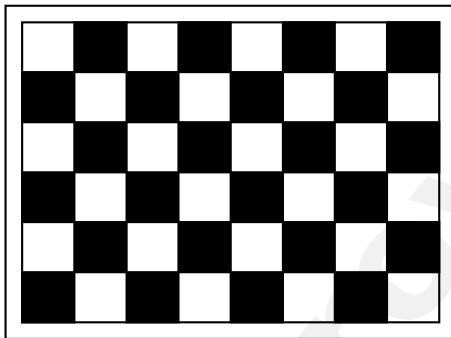

Typical Power Pattern

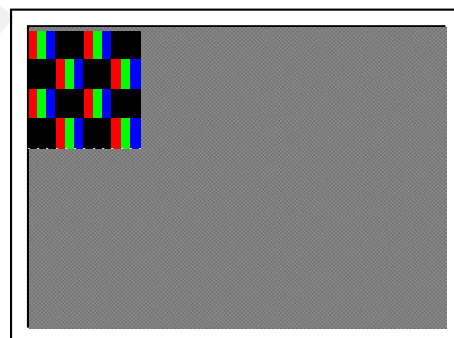

**Maximum power pattern
(1dot)**

FIG.3-1 Mosaic Pattern & 1dot Pattern For Power Consumption Measurement

Product Specification

Table 3-2. LED Bar Electrical Characteristics

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
LED String Current	Is	-	77	82	mA	1,2
LED String Voltage	Vs	27.6	28.6	29.6	V	1,3
Power Consumption	PBar	-	66.1	68.4	Watt	2,5
LED Life Time	LED_LT	30,000	-	-	Hrs	4

Note: The LED consists of 88 LED packages, 30 strings(parallel) x 5 packages(serial)

Notes:

- 1) The specified values are for dual LED bar.
- 2) The specified current is defined as the input current for single LED string with 100% duty cycle.
- 3) The specified voltage is the input LED string voltage at typical current 100% duty cycle.
- 4) The LED life time is defined as the time when brightness of LED itself reach to the 50% of initial value under the conditions at $T_a = 25 \pm 2^\circ\text{C}$ and typical LED string current.
- 5) The power consumption shown above does not include the loss of external LED driver.
 The typical power consumption is calculated as $P_{\text{bar}} = V_s(\text{Typ.}) \times I_s(\text{Typ.}) \times \text{No. of strings}$.
 The maximum power consumption is calculated as $P_{\text{bar}} = V_s(\text{Max.}) \times I_s(\text{Typ.}) \times \text{No. of strings}$.

Product Specification

3-2. Interface Connections

3-2-1. LCD Module


- LCD Connector(Receptacle): GT05Q-30S-H10-MN(LSMtron), HD2S030HA2(JAE), KN38B-30S-0.5H(HIROSE)
- Mating Connector(Plug): 20453-030T(Manufactured by I-PEX)

Table 3-3. Module Connector(CN1) Pin Configuration


No	Symbol	Description	No	Symbol	Description
1	V _{LCD}	Power Supply +10.0V	16	L0_P	True Signal for Main Link 0
2	V _{LCD}	Power Supply +10.0V	17	L0_N	Component Signal for Main Link 0
3	V _{LCD}	Power Supply +10.0V	18	GND	Ground
4	V _{LCD}	Power Supply +10.0V	19	L1_P	True Signal for Main Link 1
5	V _{LCD}	Power Supply +10.0V	20	L1_N	Component Signal for Main Link 1
6	NC	No Connection	21	GND	Ground
7	GND	Ground	22	L2_P	True Signal for Main Link 2
8	NC	No Connection(I2C serial interface for LCM)	23	L2_N	Component Signal for Main Link 2
9	NC	No Connection(I2C serial interface for LCM)	24	GND	Ground
10	GND	Ground	25	L3_P	True Signal for Main Link 3
11	HPD	Hot Plug Detect Signal	26	L3_N	Component Signal for Main Link 3
12	GND	Ground	27	GND	Ground
13	AUX_N	Component Signal for Auxiliary Channel	28	BIST	L(GND): Black, H(3.3V): Rotational Pattern
14	AUX_P	True Signal for Auxiliary Channel	29	NC	No Connection
15	GND	Ground	30	GND	Ground

Notes:

- 1) All GND(ground) pins should be connected together to the LCD module's metal frame.
- 2) All V_{LCD}(power input) pins should be connected together.
- 3) BIST(Build In Self Test): If BIST pin is tied to "High(3.3V)", T-con generates rotational pattern.
Time to stay at every pattern is about 2sec.

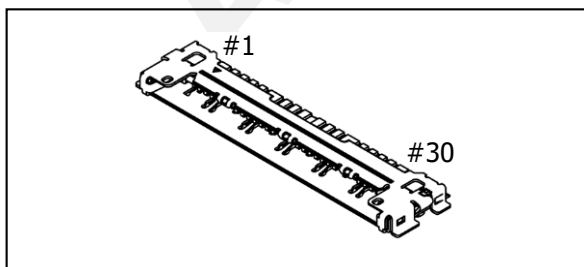

GT05Q-30S-H10-MN

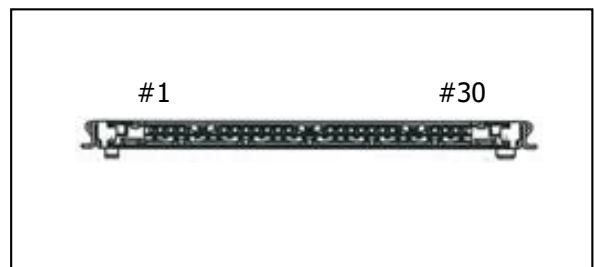


Rear view of LCM

Product Specification

3-2-2. eDP Signal Specifications

1. eDP Main Link Signal

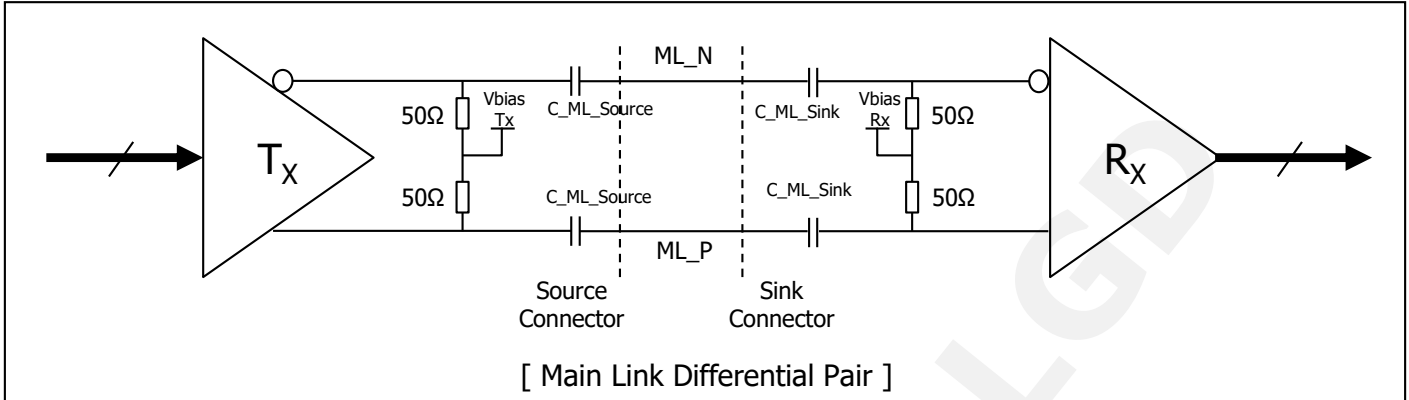


Parameter	Symbol	Min	Typ	Max	Unit	Notes
Unit Interval for High Bit Rate (5.4Gbps / Lane)	UI_HBR2	-	185	-	ps	
Link Clock Down Spreading	Amplitude	0	-	0.5	%	
	Frequency	30	-	33	kHz	
Maximum Output Voltage Level at Source Side Connector	$V_{TX-DIFFp-p-Max}$	-	-	1.38	V	6
Differential Peak to peak Voltage at Sink Side Connector	$V_{RX-DIFFp-p}$	0.09	-	-	V	7
EYE width at Sink Side Connector	$T_{RX-EYE-CONN}$	0.38	-	-	UI	6,7
Lane Intra-pair Skew	$L_{RX-SKEW-INTRA_PAIR}$	-	-	50	ps	
AC Coupling Capacitor	$C_{SOURCE-ML}$	75	-	200	nF	Source side

Notes:


- 1) In cabled embedded system, it is recommended the system designer ensure that EYE width and voltage are met at the sink side connector pins.
- 2) Mismatched common mode voltage will occur abnormal display.
- 3) All eDP electrical spec is measured at sink connector side.

Product Specification

Note 6) Definition of Differential Voltage

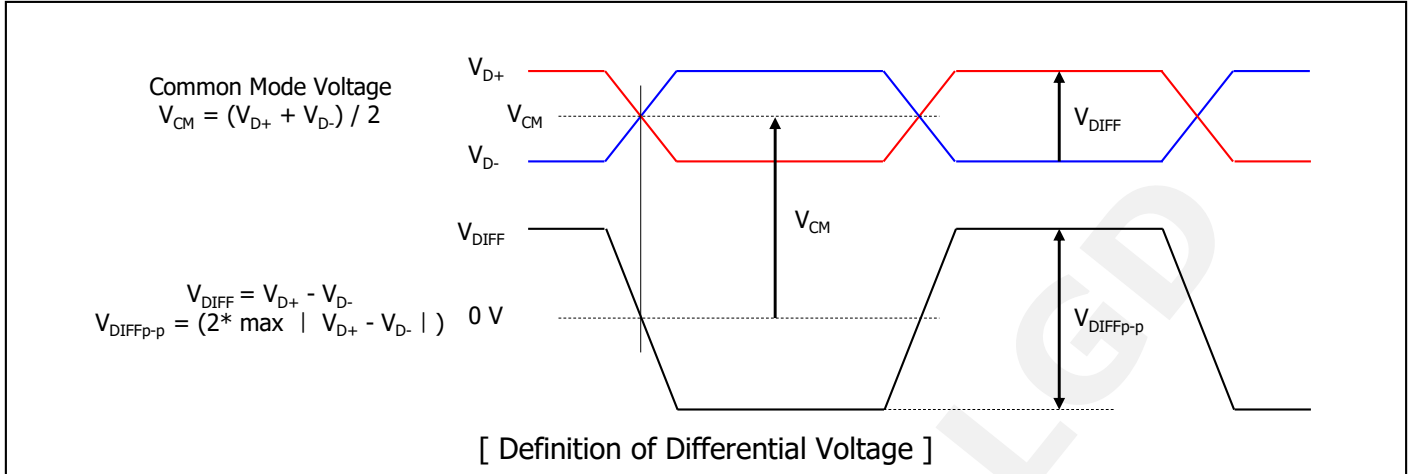

Note 7) Main Link EYE Diagram

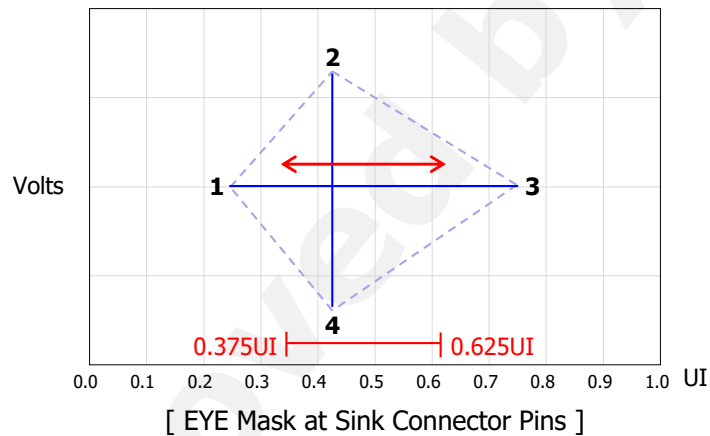


Point	High Bit Rate 2 @ TP3 EQ	
	Time(UI)	Voltage(V)
1	Any UI location (x) where the eye width is open from x to x + 0.38UI	0.000
2	Any passing UI location between 0.375UI - 0.625UI	0.045
3	Point 1 + 0.38UI	0.000
4	Same as Point 2	-0.045

[EYE Mask Vertices at embedded DP Sink Connector Pins]

Product Specification

2. eDP AUX Channel Signal

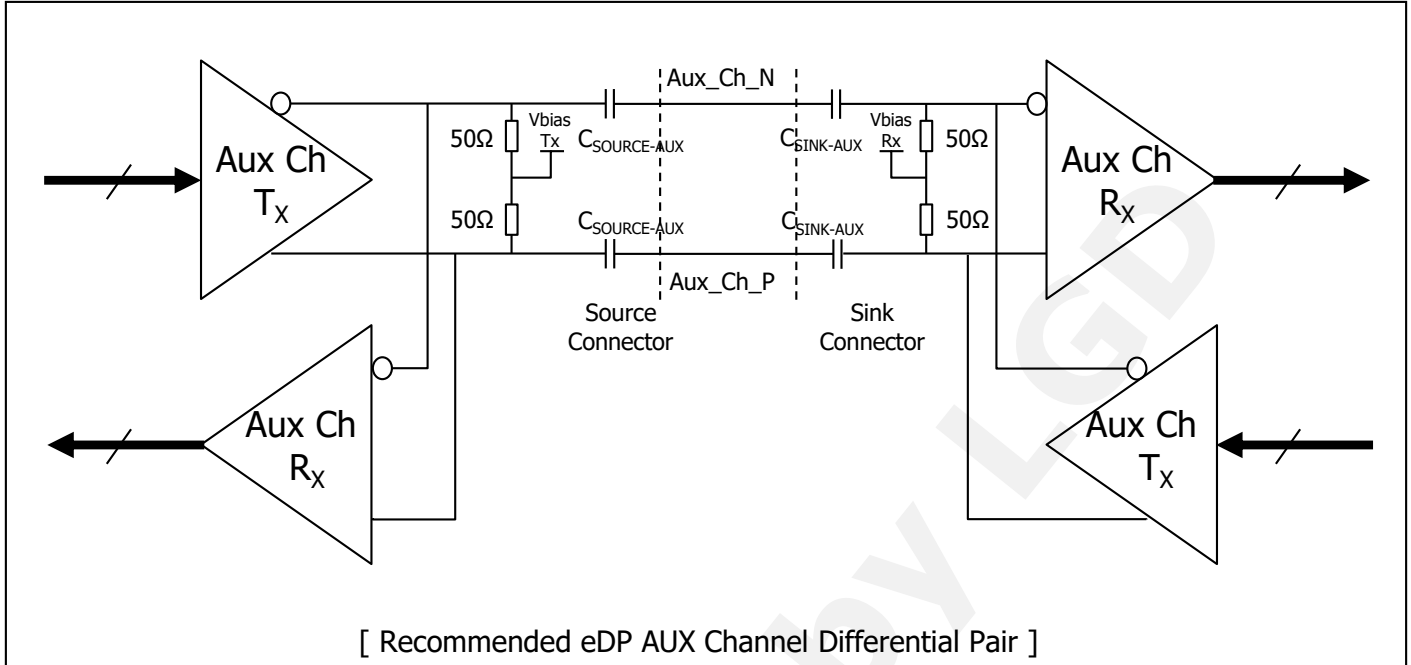


Parameter	Symbol	Min	Typ	Max	Unit	Notes
AUX Unit Interval	UI	0.4	-	0.6	us	
AUX Jitter at Rx IC Package Pins	T_{jitter}	-	-	0.05	UI	Equal to 30ns
AUX Peak-to-peak Voltage at Connector Pins of Receiving	$V_{AUX-DIFFp-p}$	0.32	-	1.36	V	
AUX Peak-to-peak Voltage at Connector Pins of Transmitting		0.39	-	1.38	V	
AUX EYE width at Connector Pins of Tx and Rx		0.98	-	-	UI	
AUX AC Coupling Capacitor	$C_{SOURCE-AUX}$	75	-	200	nF	Source side

Notes:

- 1) $V_{AUX-DIFFp-p} = 2 * |V_{AUXP} - V_{AUXN}|$
- 2) Termination resistor should be 50ohm $\pm$ 5% at source side to AUX level.
- 3) Mismatched common mode voltage will occur abnormal display.

Product Specification

3. eDP HDP Signal

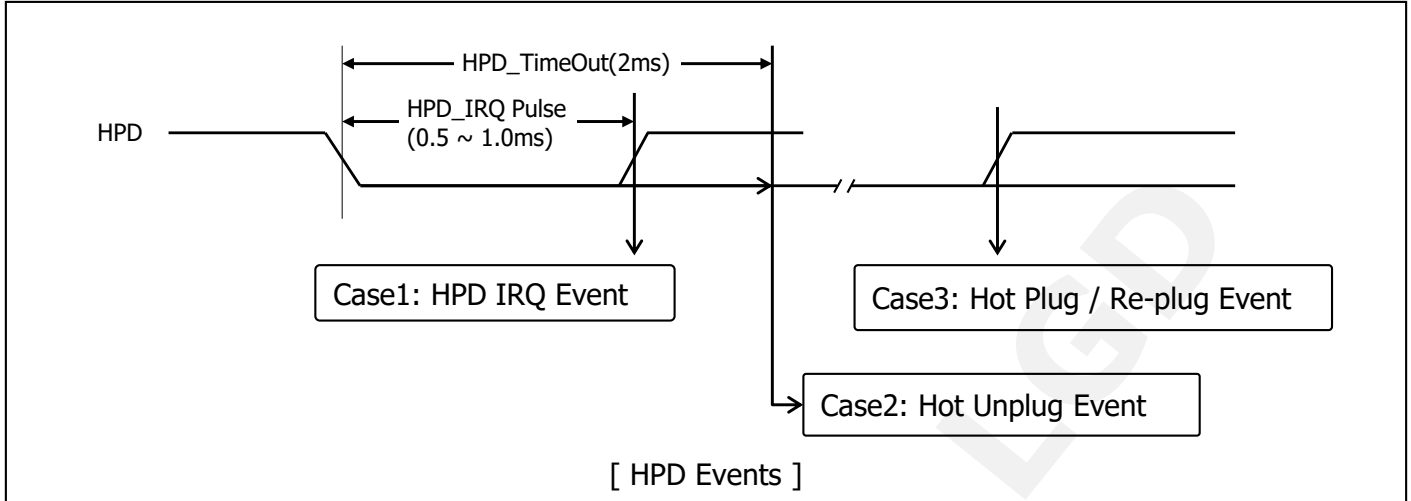

Parameter	Symbol	Min	Typ	Max	Unit	Notes
HPD Voltage	HPD	2.25	-	3.6	V	Sink side Driving
Hot Plug Detection Threshold		2.0	-	-	V	Source side Detecting
Hot Unplug Detection Threshold		-	-	0.8	V	
HPD_IRQ Pulse Width	HPD_IRQ	0.5	-	1.0	ms	
HPD_TimeOut		2.0	-	-	ms	HPD Unplug Event

Notes:

- 1) HPD IRQ: Sink device wants to notify the Source device that Sink's status has changed so it toggles HPD line, forcing the Source device to read its Link / Sink Receiver DPCD field via the AUX-CH.
- 2) HPD Unplug: The Sink device is no longer attached to the Source device and the Source device may then disable its Main Link as a power saving mode.
- 3) Plug / Re-plug: The Sink device is now attached to the Source device, forcing the Source device to read its Receiver capabilities and Link / Sink status Receiver DPCD fields via the AUX-CH.

Product Specification

3-2-3. Backlight connector pin configuration

Table 3-4. Backlight connector pin configuration(CN2, CN3)

The LED interface connector is a 12507HS-H20G1 (Manufactured by YEONHO)

The mating connector is a 12507WR-H20G (Manufactured by YEONHO)

The pin configuration for the connector is shown in the table below.

Pin	Symbol	Pin-description (CN2, CN3)	Remark	Pin	Symbol	Pin-description (CN2, CN3)	Remark
#1	FB1	Channel1 Current Feedback	Left-down side(CN2) & Right-up Side(CN3) in front view	#11	FB9	Channel9 Current Feedback	Right-down side(CN3) & Left-up Side(CN2) in front view
#2	FB2	Channel2 Current Feedback		#12	FB10	Channel10 Current Feedback	
#3	FB3	Channel3 Current Feedback		#13	FB11	Channel11 Current Feedback	
#4	FB4	Channel4 Current Feedback		#14	NC	NC	
#5	V LED	LED power supply (FB1~FB4)		#15	V LED	LED power supply (FB9~FB11)	
#6	V LED	LED power supply (FB5~FB8)		#16	V LED	LED power supply (FB12~FB15)	
#7	FB5	Channel5 Current Feedback		#17	FB12	Channel12 Current Feedback	
#8	FB6	Channel6 Current Feedback		#18	FB13	Channel13 Current Feedback	
#9	FB7	Channel7 Current Feedback		#19	FB14	Channel14 Current Feedback	
#10	FB8	Channel8 Current Feedback		#20	FB15	Channel15 Current Feedback	

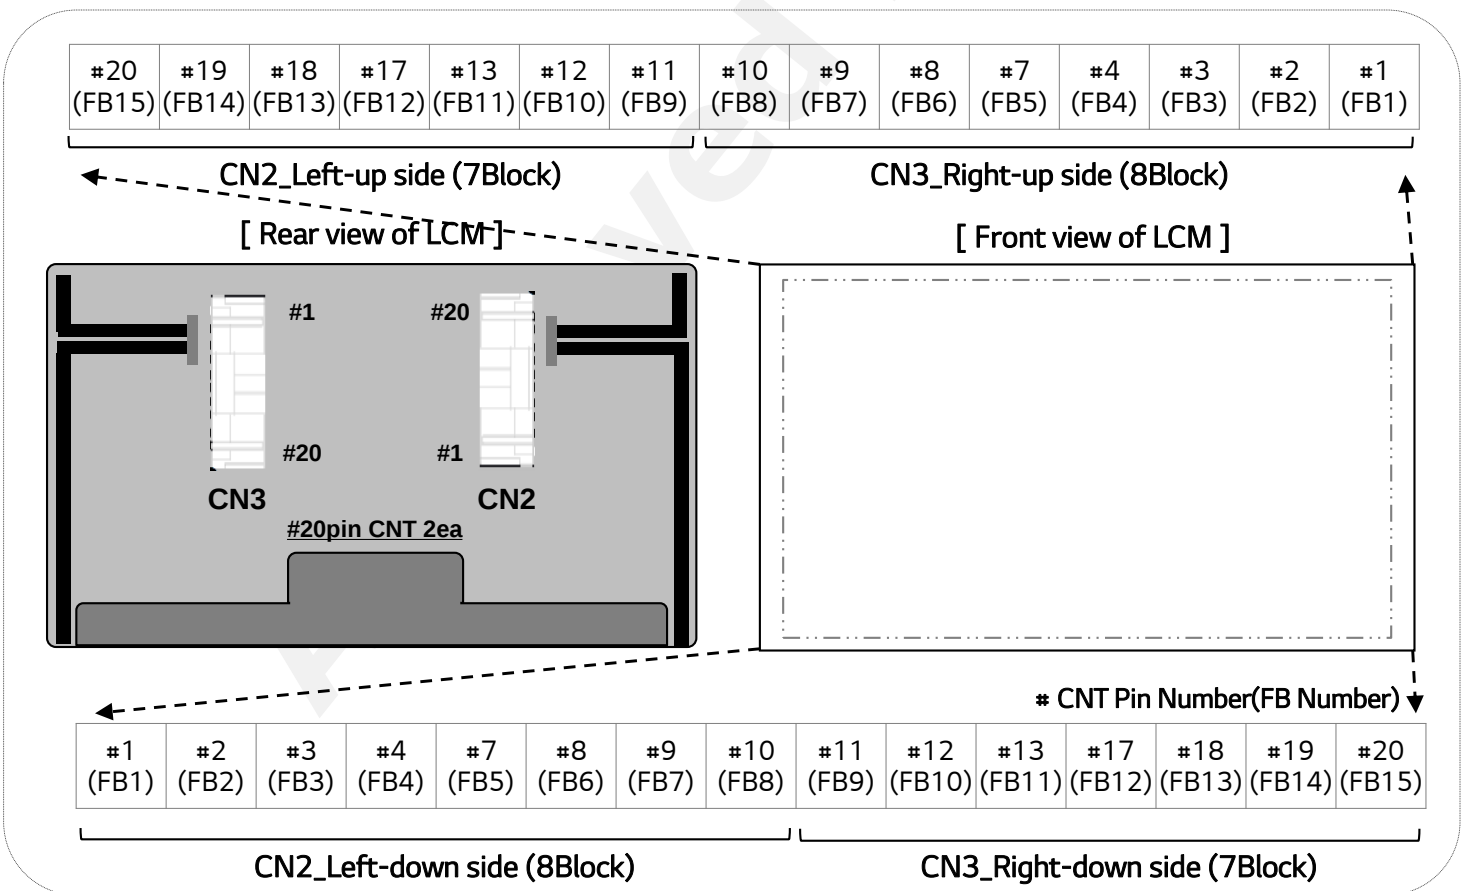


FIG.3-2 Backlight Connector View

Product Specification

3-3. Signal Timing Specifications

This is the signal timing requirement from the signal transmitter. All of the interface signal timing should be satisfied with the following specifications for its proper operation.


Table 3-5. Timing Table

Item	Symbol	Symbol	Min	Typ	Max	Unit	Notes
DCLK	Period	tCLK	1.82	1.875	1.93	ns	Pixel frequency (Typ. 533.25 MHz)
	Frequency	fCLK	518.25	533.25	548.25	MHz	
Hsync	Period	tHP	3968	4000	4040	tCLK	1,3,4
	Horizontal Valid	tHV	3840	3840	3840	tCLK	
	Horizontal Blank	tHB	128	160	192	tCLK	
	Frequency	fH	131.98	133.31	134.65	kHz	
	Width	tWH	28	32	36	tCLK	
	Horizontal Back Porch	tHBP	52	80	108	tCLK	
	Horizontal Front Porch	tHFP	48	48	48	tCLK	
Vsync	Period	tVP	2220	2222	2268	tHP	2,4 *Adaptive sync: 40 ~ 59.996Hz
	Vertical Valid	tVV	2160	2160	2160	tHP	
	Vertical Blank	tVB	60	62	108	tHP	
	Frequency	fV	58.2	59.997	61.68	Hz	
	Width	tWV	5	5	5	tHP	
	Vertical Back Porch	tVBP	52	54	100		
	Vertical Front Porch	tVFP	3	3	3		

Notes:

- 1) The value of Hsync Period, Hsync Width and Hsync valid should be even number times of tCLK. If the value is odd number times of tCLK, it can make asynchronous signal timing and cause abnormal display.
- 2) The performance of the electro-optical characteristics may be influenced by variance of the vertical refresh rates.
- 3) The value of Hsync Period, Hsync Width, and Horizontal Back Porch should be divided by 4 without a remainder.
- 4) The polarity of Hsync, Vsync is not restricted.
 - ※ It would not work usually under still image & reliability test. Under those condition, the phenomenon such as image sticking and flickering could be found on the screen

3-4. Signal Timing Waveforms

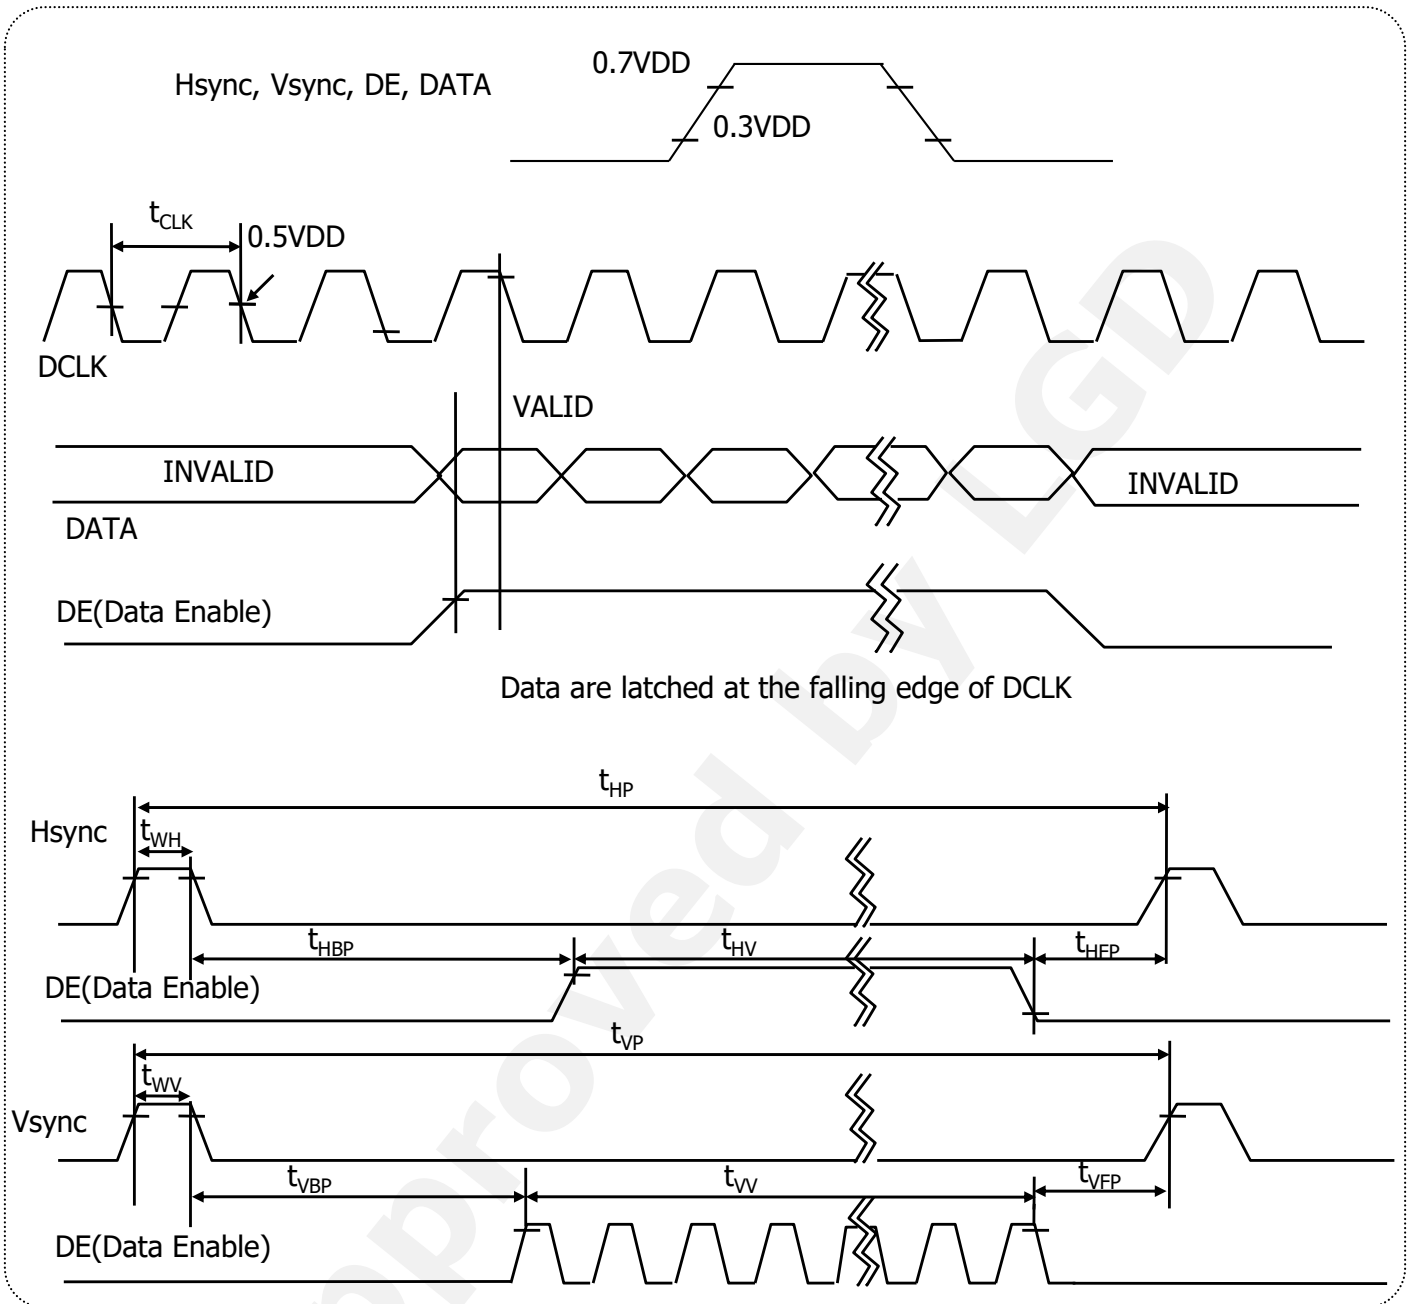

Product Specification

3-5. Color Data Reference

The Brightness of each primary color(Red,Green,Blue) is based on the 10-bit gray scale data input for the color; the higher the binary input, the brighter the color.

The table below provides a reference for color versus data input.

Table 3-6. Color Data Reference

Color		Input Color Data																															
		RED										GREEN										BLUE											
		MSB					LSB					MSB					LSB					MSB					LSB						
		R9	R8	R7	R6	R5	R4	R3	R2	R1	R0	G9	G8	G7	G6	G5	G4	G3	G2	G1	G0	B9	B8	B7	B6	B5	B4	B3	B2	B1	B0		
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Red (1023)	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	Green (1023)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0		
	Blue (1023)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1		
	Cyan	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
	Magenta	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1		
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0		
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
RED	RED (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	RED (1)	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	...	...										...										...											
	RED (1022)	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	RED (1023)	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
GREEN	GREEN (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	GREEN (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0		
	...	...										...										...											
	GREEN (1022)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0		
	GREEN (1023)	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0		
BLUE	BLUE (0)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
	BLUE (1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0		
	...	...										...										...											
	BLUE (1022)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0		
	BLUE (1023)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1		

Product Specification

3-6. Power Sequence

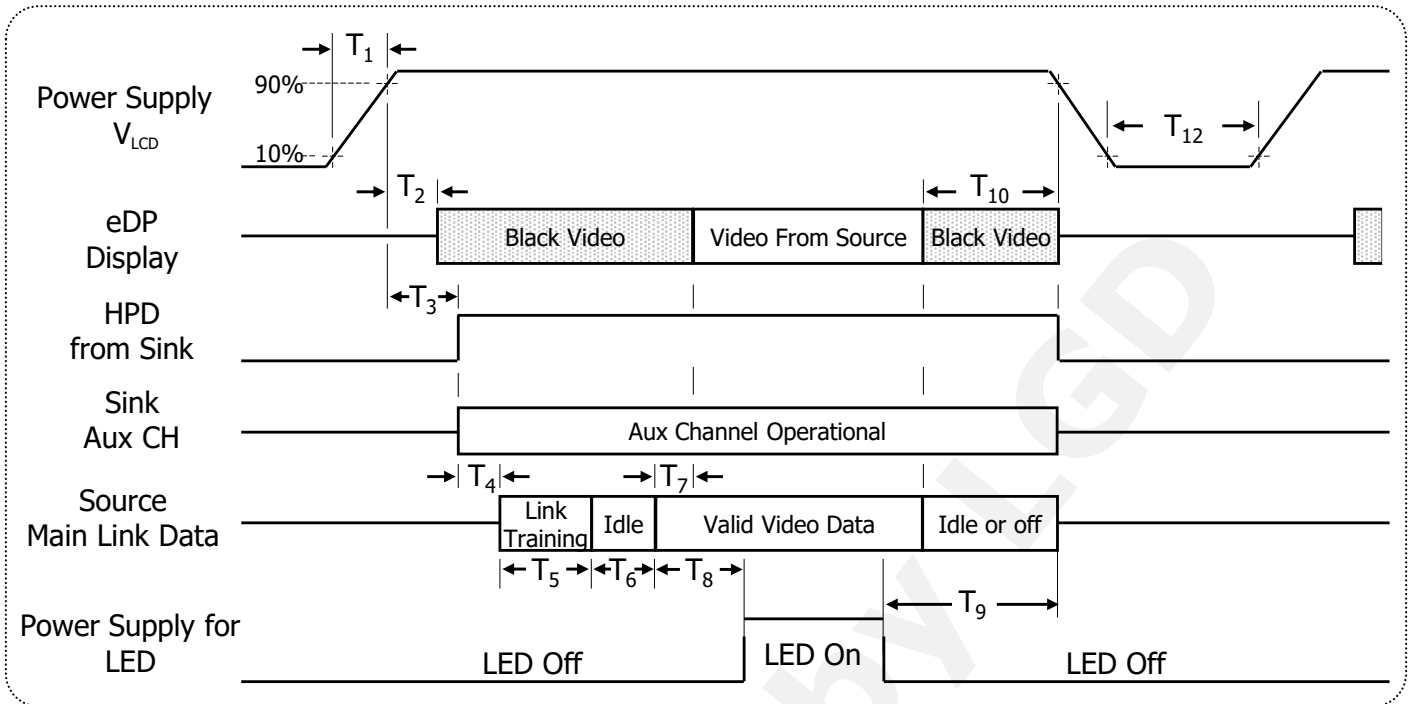


Table 3-7. Power Sequence

Timing	Required By	Limits		Units	Notes
		Min	Max		
T ₁	Source	0.5	10	ms	
T ₂	Sink	10	200	ms	
T ₃	Sink	15	200	ms	
T ₄	Source	-	-	ms	5
T ₅	Source	-	-	ms	5
T ₆	Source	-	100	ms	6
T ₈	Source	350	-	ms	
T ₉	Source	200	-	ms	4

Timing	Required By	Limits		Units	Notes
		Min	Max		
T ₁₀	Source	0	500	ms	
T ₁₂	Source	1000	-	ms	

Notes:

- Power sequence should be kept all the time including below cases for normal operation.
 - AC/DC Power On/Off
 - Mode change (resolution, frequency, timing, sleep mode, color depth change, etc.)
 The violation of power sequence can cause a significant trouble in display and reliability.
- Please avoid floating state of interface signal during signal invalid period.
- When the interface signal is invalid, be sure to pull down the V_{LCD} (0V)
- Please turn off the power supply for LED when the level of V_{LCD} changes to prevent noise issue.
- Link training duration is dependent on the customer's system.
- It includes Source Frame Synchronization time.

Source Frame Synchronization: Time to prepare before Tx(Source) sends valid data(Invalid period).

3-7. Power Dip Condition

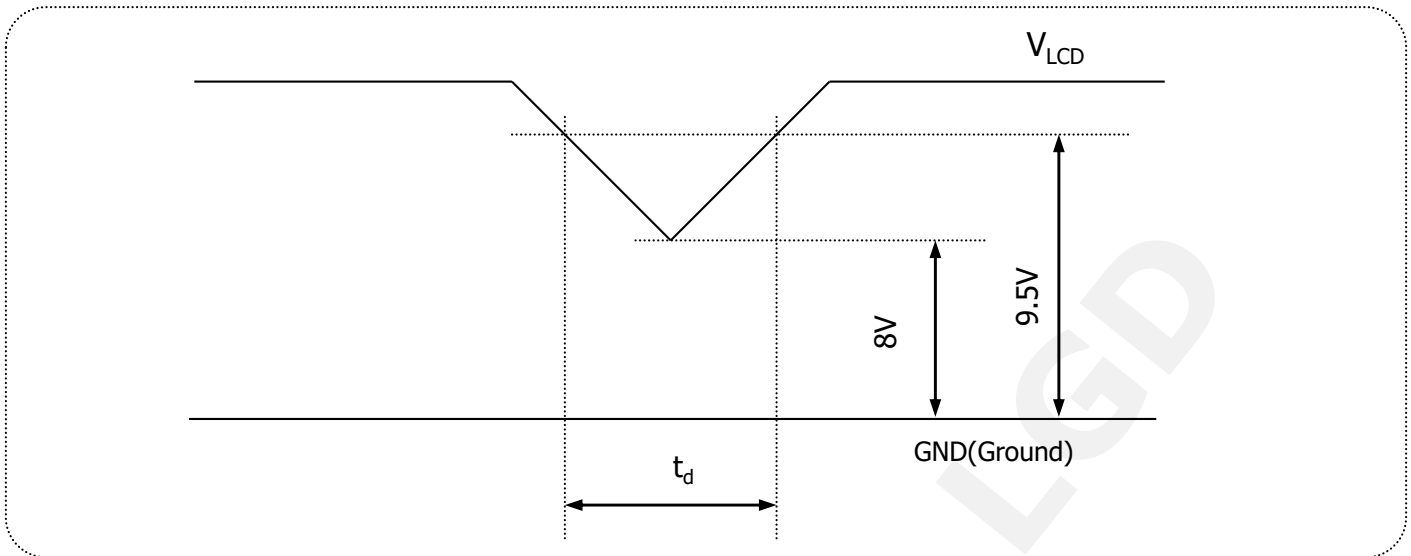


FIG.3-3 Power Dip Condition

For proper operation, stable power supply of V_{LCD} is necessary and power dip is allowed only in below condition. Except this condition, power on/off should follow power sequence specification exactly.

1) Dip Condition

$$8V \leq V_{LCD} < 9.5V, \quad t_d \leq 20ms$$

Product Specification

4. Optical Specifications

Optical characteristics are determined after the unit has been 'ON' for approximately 30 minutes in a dark environment at $25 \pm 2^\circ\text{C}$. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and θ equal to 0° and aperture 1 degree.

FIG.4-1 presents additional information concerning the measurement equipment and method.

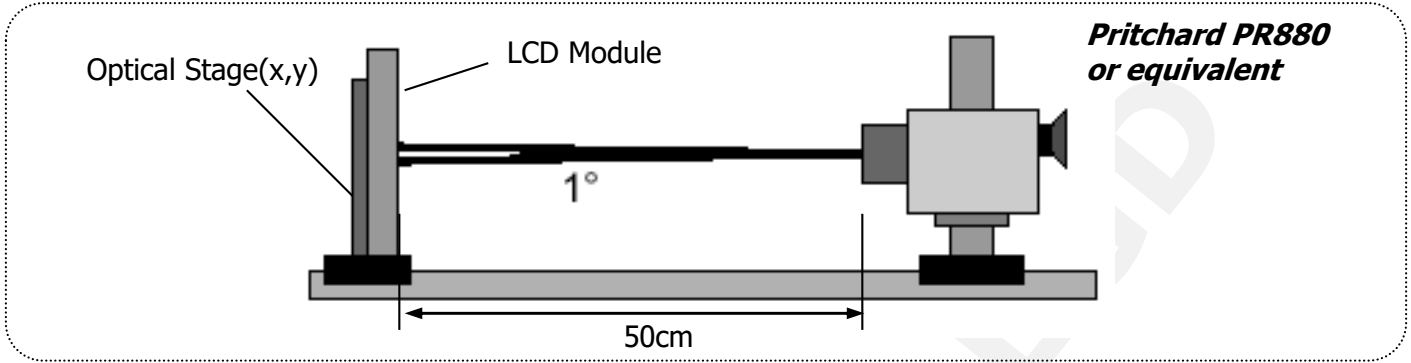


FIG.4-1 Optical Characteristic Measurement Equipment And Method

Table 4-1. Optical Characteristics

($T_a = 25^\circ\text{C}$, $V_{\text{LCD}} = \text{Typ}$, $f_v = 60\text{ Hz}$, $\text{DCLK} = \text{Typ}$, $I_s = \text{Typ mA}$)

Parameter		Symbol	Values			Units	Notes
			Min.	Typ.	Max.		
Contrast Ratio		CR	1400	2000	-		1
Surface Luminance, white		L _{WH}	800	1000	-	cd/m ²	2
Luminance Variation		δ _{WHITE}	75	-	-	%	3
Response Time	Gray to Gray	T _{GTG_AVR}	-	14	28	ms	4
Color Gamut		sRGB(CIE 1931)	95	100	-	%	5
Color Coordinates [CIE 1931] <i>(By PR650)</i>	Red	R _x	Typ -0.03	0.660	Typ +0.03		
		R _y		0.328			
	Green	G _x		0.283			
		G _y		0.654			
	Blue	B _x		0.150			
		B _y		0.053			
	White	W _x		0.313			
		W _y		0.329			
Color Temperature		-	-	6500	-	K	
Viewing Angle (CR>10, General)	Horizontal	θ _H	170	178	-	Degree	6
	Vertical	θ _V	170	178	-		
Gray Scale		-		2.2			7

Product Specification

Notes:

- 1) **Contrast Ratio(CR)** is defined mathematically as: **(By PR880)**
It is measured at center point(1)

$$\text{Contrast ratio} = \frac{\text{Surface luminance with all white pixels}}{\text{Surface luminance with all black pixels}}$$


- 2) **Surface Luminance(L_{WH})** is the luminance value at center 1 point(1) across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG.4-1. **(By PR880)**

- 3) The **Variation in Surface Luminance**, δ_{WHITE} is defined as: **(By PR880)**

$$\delta_{\text{WHITE}} = \frac{\text{Minimum}(LP1, LP2, \dots, LP9)}{\text{Maximum}(LP1, LP2, \dots, LP9)} \times 100(\%)$$

Where L1 to L9 are the luminance with all pixels displaying white at 9 locations.
For more information see FIG.4-2.

<Measuring Point For Luminance Variation>

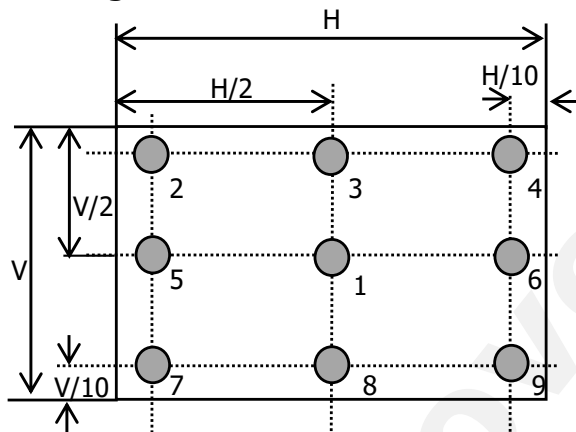

@ H,V: Active Area

<Measuring Point For Surface Luminance>

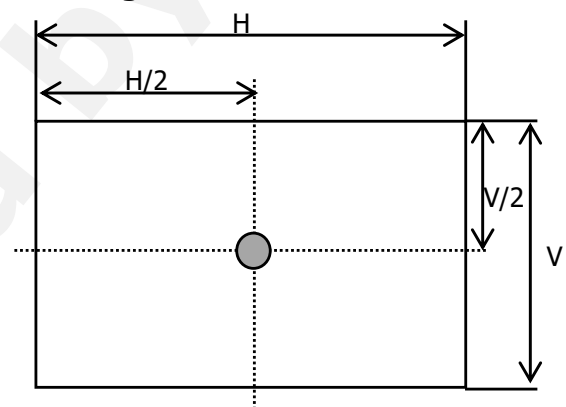


FIG.4-2 Measure Point for Luminance

Product Specification

Notes:

- 4) The **Gray To Gray Response Time** is defined as the following figure and shall be measured by switching the input signal for "Gray To Gray ". (**By RD80S**)
- Gray step: 5 Step
 - T_{GTG_AVR} is the total average time at rising time and falling time for "Gray To Gray ".
 - For the GTG measurement, the sampling rate of oscilloscope is 500k/s.

Table 4-2. GTG Gray

Gray to Gray		Rising Time				
		G1023	G767	G511	G255	G0
Falling Time	G1023					
	G767					
	G511					
	G255					
	G0					

Response Time is defined as the following figure and shall be measured by switching the input signal for "Gray(N)" and "Gray(M)".

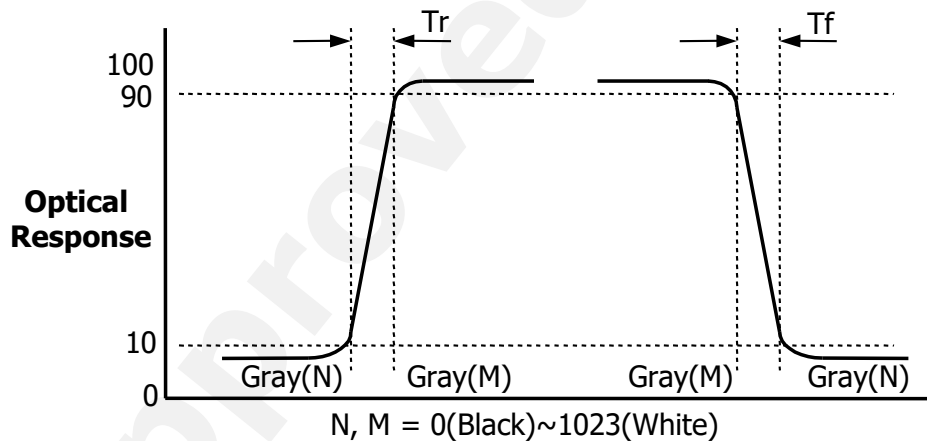


FIG.4-3 Response Time

- 5) **sRGB color gamut**, which is more than or equal to typ. 99.5%, is stated as 100%

Product Specification

Notes:

- 6) **Viewing Angle** is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG.4-4. **(By PR880)**

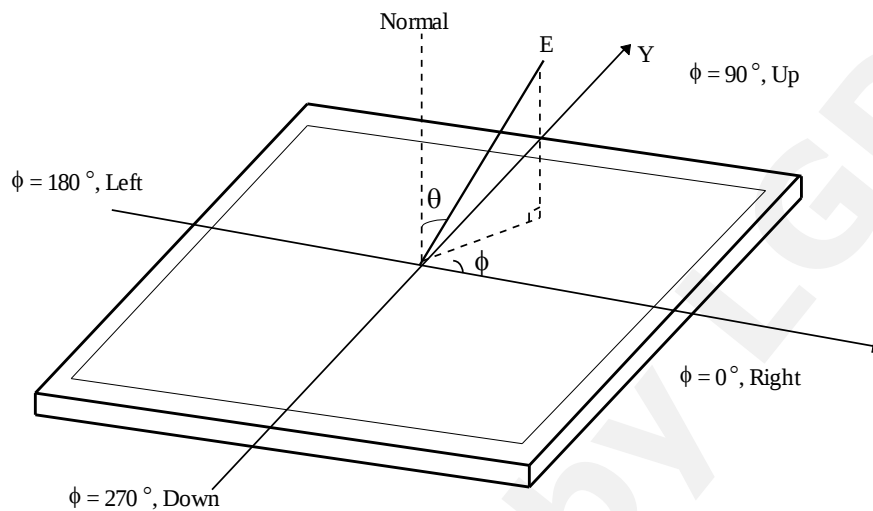


FIG.4-4 Viewing Angle

- 7) **Gamma Value** is approximately 2.2. For more information see below table.

Table 4-3. Gray Scale Specification

Gray Level	Relative Luminance [%](Typ)
0	(0.05)
63	0.3
127	1.08
191	2.5
255	4.72
319	7.7
383	11.49
447	16.2
511	21.66
575	28.2
639	35.45
703	43.8
767	53.0
831	63.3
895	74.48
959	86.8
1023	100

Product Specification

5. Mechanical Characteristics

The contents provide general mechanical characteristics. In addition the figures in the next page are detailed mechanical drawing of the LCD.


Outline Dimension	Horizontal	730.70mm
	Vertical	425.20mm
	Depth	22.20mm
Bezel Area	Horizontal	-
	Vertical	-
Active Display Area	Horizontal	697.3056mm
	Vertical	392.2344 mm
Weight	Typ: 5,900g , Max: 6,200g	
Surface Treatment	Anti-Glare treatment of the front polarizer(Haze25%, 3H)	

Note: Please refer to a mechanical drawing in terms of tolerance at the next page.

- Outline dimensions (horizontal, vertical and outside depth) are measured by using vernier calipers.
- The inside depth dimensions are measured by using height gauge, when LCM is put face down onto a flat surface.




Product Specification

<Front View>

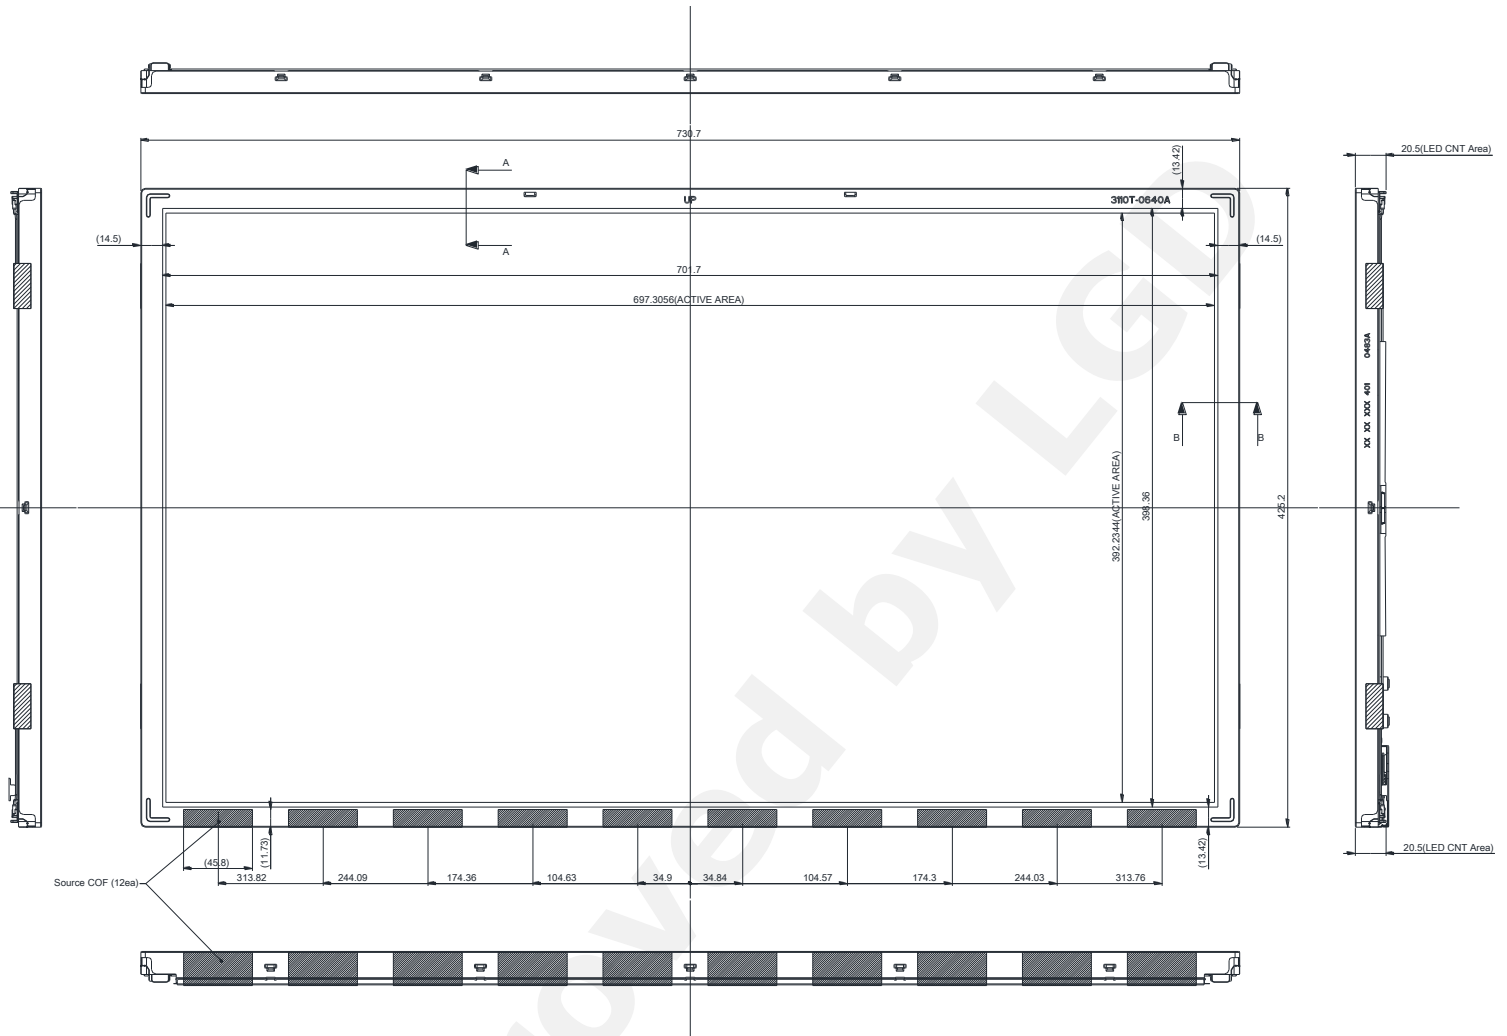

Notes






1. I/F connector specification : LSMtron, GT05Q-30S-H10-MN or Equivalent
2. LED connector specification : YEONHO, 12507HS-H20G1
3. Torque of user hole: 3.0~4.0kgf-cm.
4. Tilt and partial disposition tolerance of display area are as following
 - (1) Y-direction : $|A-B| < 1.4\text{mm}$
 - (2) X-direction : $|C-D| < 1.4\text{mm}$

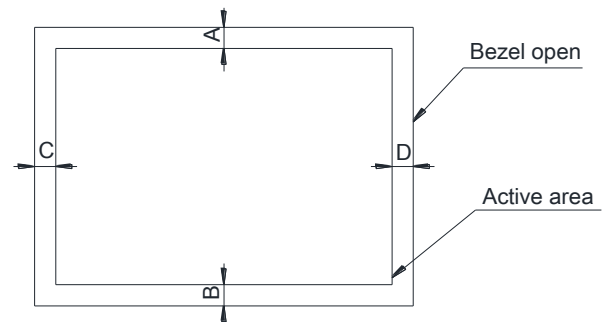

5. Unspecified tolerances to be ± 0.5
6. The LCM warp(warpage) is less than 1.0 on the surface plate
7. The COF area(hatching area) is weak & sensitive, so please don't press the COF area
8. Undefined height should follow the 3D modeling data.

Product Specification

<Rear View>

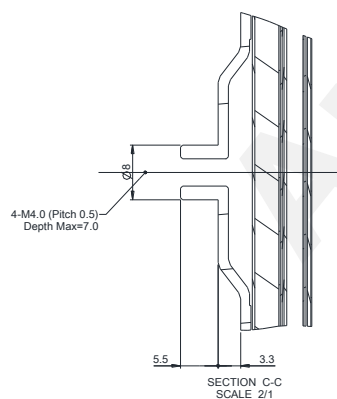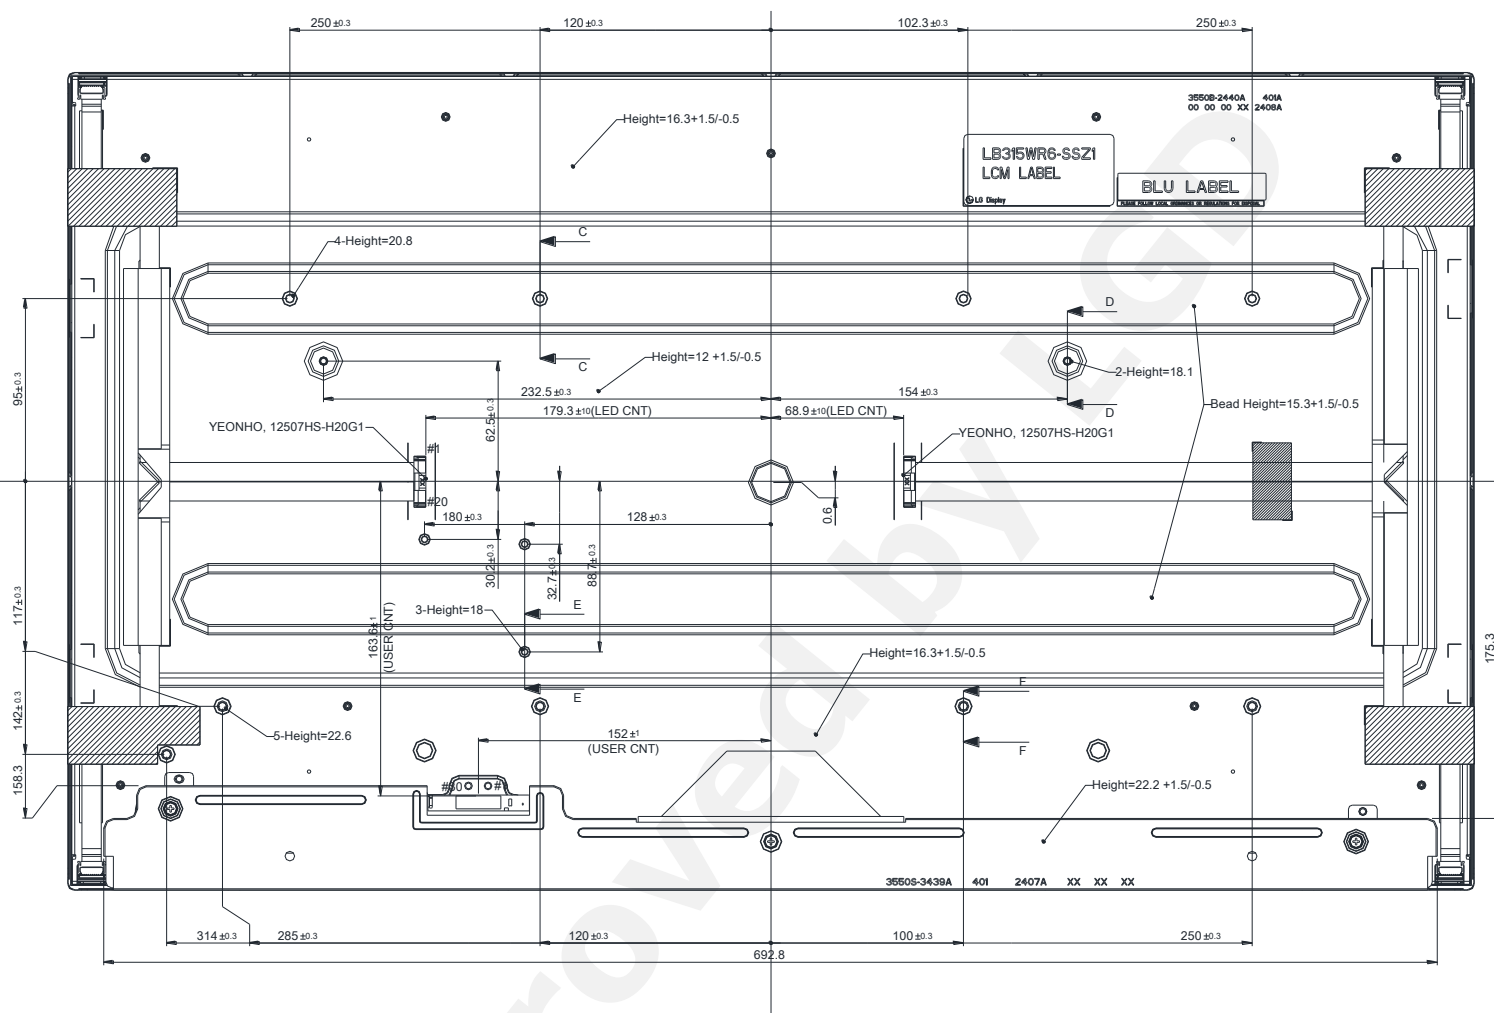

Product Specification

6. Reliability

Environment test condition

No	Test Item	Condition	Notes
1	High temperature storage test	$T_a = 60^{\circ}\text{C}$, 240h	1
2	Low temperature storage test	$T_a = -20^{\circ}\text{C}$, 240h	1
3	High temperature operation test	$T_a = 50^{\circ}\text{C}$, 50%RH, 240h	1
4	Low temperature operation test	$T_a = 0^{\circ}\text{C}$, 240h	1
5	Vibration test (non-operating)	Waveform : Random Vibration level : 1.15Grms Bandwidth : 10-300Hz Duration : X,Y,Z, 10min One time each direction	
6	Shock test (non-operating)	Shock level : 100G Waveform : Half sine wave, 2ms Direction : $\pm X$, $\pm Y$, $\pm Z$ One time each direction	
7	Altitude Operating Storage / Shipment	0 - 10,000 feet (3,048m) 0 - 40,000 feet (12,192m)	

Note 1) Result Evaluation Criteria:

TFT-LCD panels test should take place after cooling enough at room temperature.

In the standard condition, there should be no particular problems that may affect the display function.

* T_a = Ambient Temperature

7. International Standards

7-1. Safety

- a) IEC 62368-1, The International Electro-technical Commission(IEC).
Audio/video, Information and Communication Technology Equipment - Safety - Safety Requirements.
- b) EN 62368-1, European Committee for Electro-technical Standardization (CENELEC)
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- c) UL 62368-1, UL LLC.
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- d) CAN/CSA C22.2 No.62368-1, Canadian Standards Association (CSA).
Audio/video, Information and Communication Technology Equipment - Safety Requirements
- e) IEC 60950-1, The International Electro technical Commission (IEC).
Information Technology Equipment - Safety - Part 1 : General Requirements

7-2. Environment

- a) RoHS, Commission Delegated Directive (EU) 2015/863 of 31 March 2015 amending Annex II to Directive 2011/65/EU of the European Parliament and of the Council

Product Specification

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C: Size(Inch)

E: Month

D: Year

F ~ M: Serial No.

Notes:

1) Year

Year	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029
Mark	K	L	M	N	P	R	S	T	U	V

2) Month

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C


b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
 This is subject to change without prior notice.

Product Specification

8-2. Packing Form

- a) Package Quantity In One Box: 5 ea
Package Quantity In One Pallet: 30ea
 - b) Packing Size: 824mm x 364mm x 507mm
 - c) Pallet ASS'Y Size: 1,140mm x 910mm x 1,211.5mm
- * LCM Direction(Insert to Bottom Packing): COF Down

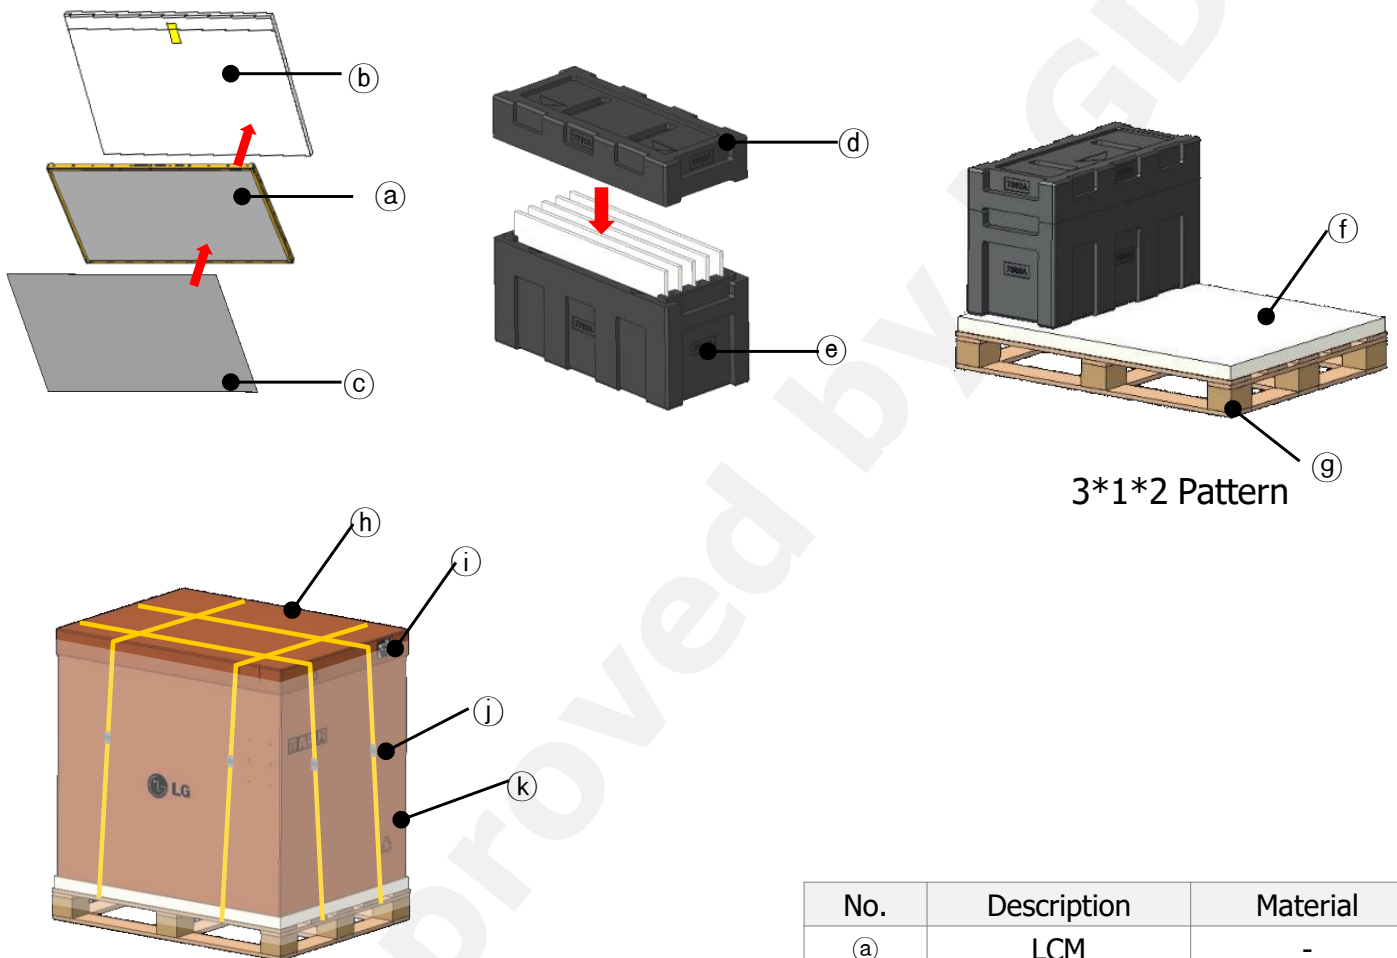

No.	Description	Material
(a)	LCM	-
(b)	Bag	AL
(c)	Protect film	PE
(d)	Packing, Top	EPS
(e)	Packing, Bottom	EPS
(f)	Pallet Cushion	EPE
(g)	Pallet	PLYWOOD
(h)	Angle Cover	PAPER
(i)	Label	YUPO
(j)	Band	PP
(k)	Angle Packing	PAPER

Product Specification

9. Precautions

Please pay attention to the followings when you use this TFT LCD module.

9-1. Mounting Precautions

- 1) You must mount a module using holes arranged in rear side.
- 2) You should consider the mounting structure so that uneven force(ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- 3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- 4) You should adopt radiation structure to satisfy the temperature specification.
- 5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- 6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.
(Some cosmetics are detrimental to the polarizer.)
- 7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- 8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- 9) Do not open the case because inside circuits do not have sufficient strength.
- 10) System frame should not have an interference with panel which can cause LC Leakage/Panel Crack due to the contraction of system frame at low temperature condition or panel damage by any other circumstances.

9-2. Operating Precautions

- 1) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- 2) Brightness depends on the temperature.(In higher temperature, it becomes lower.) And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- 3) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- 4) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- 5) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- 6) Please do not give any mechanical and/or acoustical impact to LCM. Otherwise, LCM can't be operated its full characteristics perfectly.
- 7) A screw which is fastened up the steels should be a machine screw.(if not, it causes metallic foreign material and deal LCM a fatal blow)
- 8) Please do not set LCD on its edge.
- 9) When LCMs are used for public display, defects such as Yogore image sticking phenomenon can be happened. Therefore it is not allowable to use in Public display.
- 10) LCMs cannot support "Interlaced Scan Method"
- 11) When this reverse model is used as a forward-type model (PCB on top side) or a Portrait-type mode at storage and operation, LGD can not guarantee any defects of LCM.
- 12) Please conduct image sticking test after 1-hour aging with white pattern at normal temperature. (25~40°C)

9-3. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. Precautions For Strong Light and Hazardous Materials Exposure

Strong light exposure causes degradation of polarizer and color filter.

The LCM should be avoided direct contact with hazardous materials such as sulfur, acetic acid, chlorine, etc. These materials may cause chemical reaction such as sulfurization, corrosion, discoloration, etc.

9-5. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- 1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light.
Storage condition is guaranteed under packing condition.
- 2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. Handling Precautions For Protection Film

- 1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- 2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- 3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Product Specification

APPENDIX- II-1

▪ LCM Label

Model →

UV Mark →

LGD Logo →



LB315WR6
(SS)(Z1)
RoHS Verified
LP-315Z1-X-X-X-XX-X-XXX-XXXX




LIGHT GUIDE : >PMMA<





Serial No

Origin


MADE IN CHINA

▪ Box Label

LB315WR6		
SSZ1		
5 pcs	Lot/MM-DD	
MADE IN CHINA	RoHS Verified	
 XXXXXXXXXXXXXXXX XXX		

100mm

70mm

▪ Pallet Label

LB315WR6		
SSZ1		
30 pcs	Lot/MM-DD	
MADE IN CHINA	RoHS Verified	
 XXXXXXXXXXXXXXXX XXX		

100mm

70mm