


INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

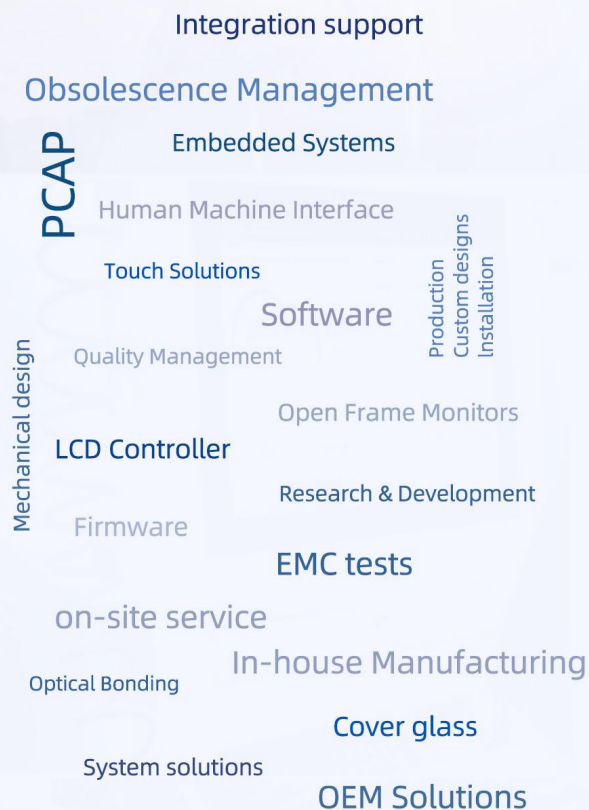

BOE	PRODUCT GROUP		REV	ISSUE DATE
	TFT- LCD PRODUCT		6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification			PAGE 2 OF 33
REVISION HISTORY				
REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED
P0	-	Initial Release	2017.09.19	wangxiaoli
P1	-	Modify Dimensional outline	2017.09.29	wangxiaoli
P2	-	Modify Packing &Label information	2017.10.13	wangqi
P3	-	Modify LCM outline	2017.10.24	wangxiaoli
P4	-	Modify catalogue	2017.10.25	wangxiaoli
P5	-	Modify INPUT SIGNALS, BASIC DISPLAY CO LORS & GRAY SCALE OF COLORS	2017.10.27	songshufen
P6	-	Modify EDID Table	2017.10.30	songshufen

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 3 OF 33	

Contents


No.	Items	Page
1.0	General Description	4
2.0	Absolute Maximum ratings	6
3.0	Electrical specifications.	7
4.0	Optical specifications.	10
5.0	Interface Connection	15
6.0	Signal Timing Specification	18
7.0	Input Signals, Display Colors & Gray Scale of Colors	20
8.0	Power Sequence	21
9.0	Connector description	22
10.0	Mechanical Characteristics	23
11.0	Reliability Test	24
12.0	Handling & Cautions.	24
13.0	Label	25
14.0	Packing information	27
15.0	Mechanical Outline Dimension	28
16.0	EDID Table	30

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 4 OF 33	

1.0 GENERAL DESCRIPTION

1.1 Introduction

NV125FMH-N82 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 12.5 inch diagonally measured active area with FHD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 16.7M colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model. All input signals are eDP interface compatible.

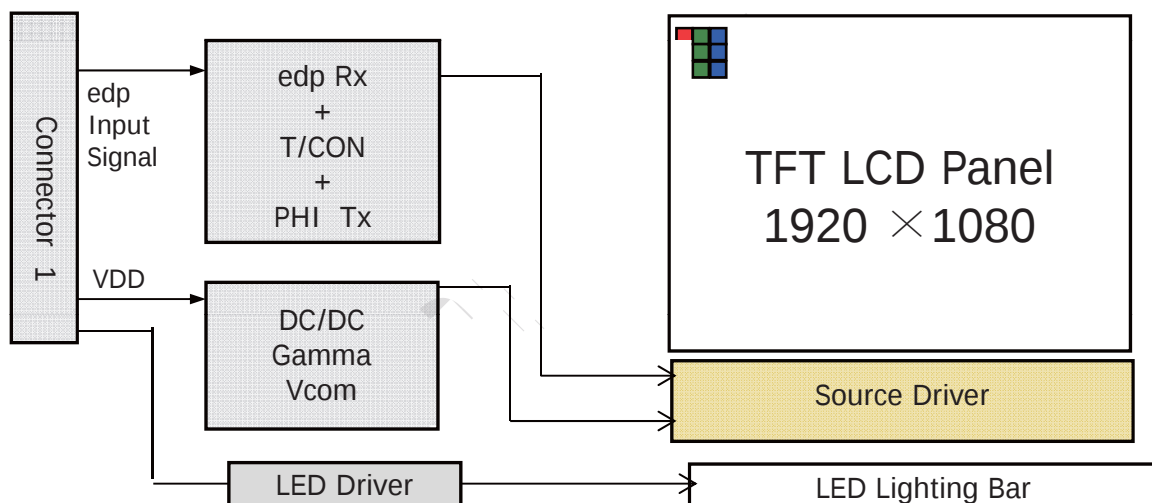

1.2 Features

- 2 lane eDP Interface with 1.62Gbps Link Rates
- Thin and light weight
- 8-bit color depth, display 16.7M colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- No Mounting frame
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

1.3 Application

- Notebook PC

1.4 General Specification

The followings are general specifications at the model NV125FHM-N82. (listed in Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	276.48(H) × 155.52(V)	mm	
Number of pixels	1920 (H) × 1080 (V)	pixels	
Pixel pitch	0.048 × RGB×0.144	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	16.7M	colors	
Display mode	Normally Black		
Dimensional outline	282.4(Typ)*167.97(Typ)*2.3(Max) Body 282.4(Typ)*179.32(Typ)*2.6(Max) With PCB	mm	tol. refers drawing
Weight	170 (max)	g	
Surface treatment	AG		
Back-light	Lower edge side, 1-LED Lighting Bar type		Note 1
Power consumption	P _D : 0.85	W	
	P _{BL} : 1.83	W	
	P _{total} : 2.68	W	

Notes : 1. LED Lighting Bar (27*LED Array)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 6 OF 33	

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

Ta=25+/-2°C


Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.3	4.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{SS} -0.3	V _{DD} +0.3	V	
Operating Temperature	T _{OP}	0	+50	°C	Note 2
Storage Temperature	T _{ST}	-20	+60	°C	

Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.

2. Temperature and relative humidity range are shown in the figure below.

95 % RH Max. (40 °C ≥ Ta)

Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

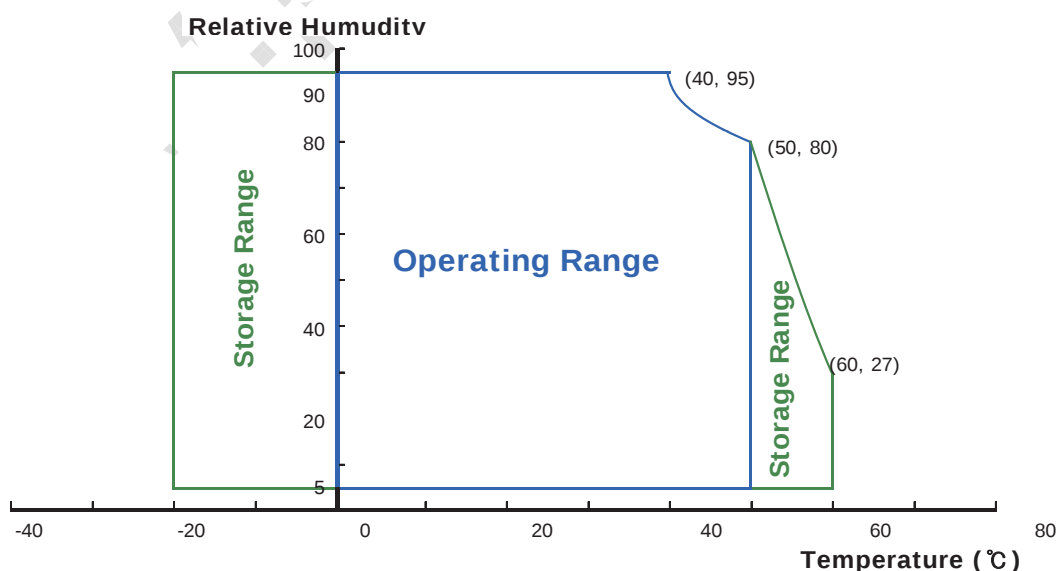

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 7 OF 33	

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-	-	100	mV	At V _{DD} = 3.3V
Power Supply Current	I _{DD}	-	258	-	mA	Note 1
Positive-going Input Threshold Voltage	V _{IT+}	-	-	100	mV	V _{cm} = 1.2V typ.
Negative-going Input Threshold Voltage	V _{IT-}	-100	-	-	mV	
Differential Input Voltage	V _{ID}	380	-	1200	mV	
Power Consumption	P _D	-	0.85		W	Note 1
	P _{BL}	-		1.83	W	Note 2
	P _{total}	-		2.68	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25°C.

a) Typ : Window XP pattern

b) Max : Horizontal 1 line skip pattern



2. Calculated value for reference (V_{LED} × I_{LED})

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 8 OF 33

3.2 Backlight Unit

< Table 4. LED Driving guideline specifications >


Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	V_F	-	-	2.9	V	-
LED Forward Current	I_F	-		20.5	mA	-
LED Power Consumption	P_{LED}		-	1.83	W	Note 1
LED Life-Time	N/A	15,000	-	-	Hour	$I_F = 21.9mA$
Power supply voltage for LED Driver	V_{LED}	5	12	21	V	
EN Control Level	Backlight on	2.0		5.0	V	
	Backlight off	0		0.6	V	
PWM Control Level	PWM High Level	2.0		5.0	V	
	PWM Low Level	0		0.6	V	
PWM Control Frequency	F_{PWM}	100	-	10,000	Hz	
Duty Ratio	-	1	-	100	%	

Notes : 1. Power supply voltage 12V for LED Driver, Driver efficiency 88%,
Calculator Value for reference $I_F \times V_F \times 27 / 0.88 = P_{LED}$
2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 9 OF 33

3.3 LED structure

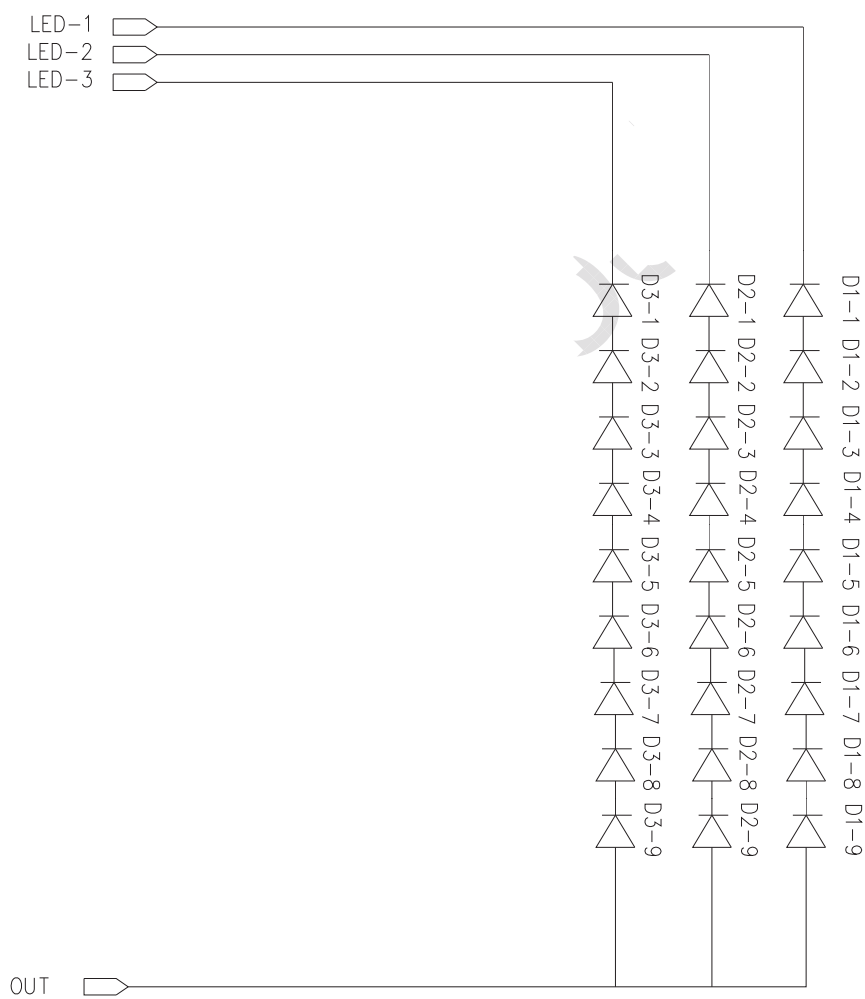

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 10 OF 33	

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta\Phi=0$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta\Phi=90$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta\Phi=180$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta\Phi=270$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be $3.3 \pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark	
Viewing Angle range	Horizontal	Θ_3	CR > 10	-	85	-	Deg.	Note 1	
		Θ_9		-	85	-	Deg.		
	Vertical	Θ_{12}		-	85	-	Deg.		
		Θ_6		-	85	-	Deg.		
Luminance Contrast ratio		CR	$\Theta = 0^\circ$		AG 600 Glare 800	-		Note 2	
Luminance of White	5 Points	Y_w	$\Theta = 0^\circ$ ILED = 20mA	255	300	-	cd/m ²	Note 3	
White Luminance uniformity	5 Points	ΔY_5		80	-	-		Note 4	
	13 Points	ΔY_{13}		65	-	-			
White Chromaticity		x_w	$\Theta = 0^\circ$	0.283	0.313	0.343		Note 5	
		y_w		0.299	0.329	0.359			
Reproduction of color	Red	x_R	$\Theta = 0^\circ$	-0.03	0.604	+0.03	-		
		y_R			0.352				
	Green	x_G			0.343				
		y_G			0.568				
	Blue	x_B			0.159				
		y_B			0.119				
Gamut				45	50	-	%		
Response Time (Rising + Falling)		T _{RT}	Ta= 25° C $\Theta = 0^\circ$	-	30	-	ms	Note 6	
Cross Talk		CT	$\Theta = 0^\circ$	-	-	2.0	%	Note 7	

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 11 OF 33

Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).

2. Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state .
(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

4. The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points}$.
(see FIGURE 2 and FIGURE 3).

5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.

6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_d .


7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark.

(See FIGURE 5).

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 12 OF 33


4.3 Optical measurements

Figure 1. Measurement Set Up

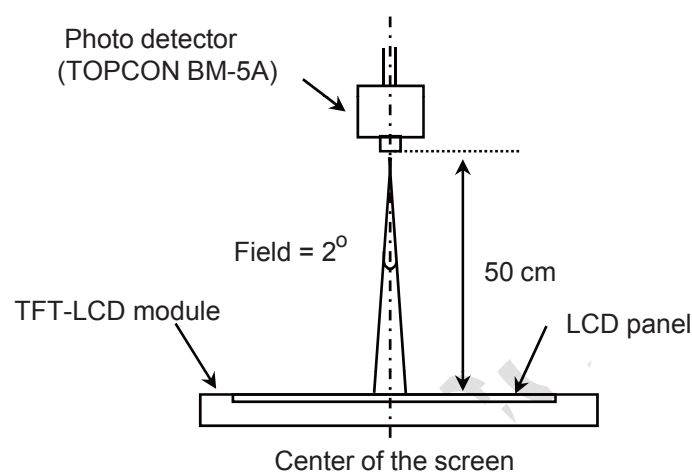

Optical characteristics measurement setup


Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

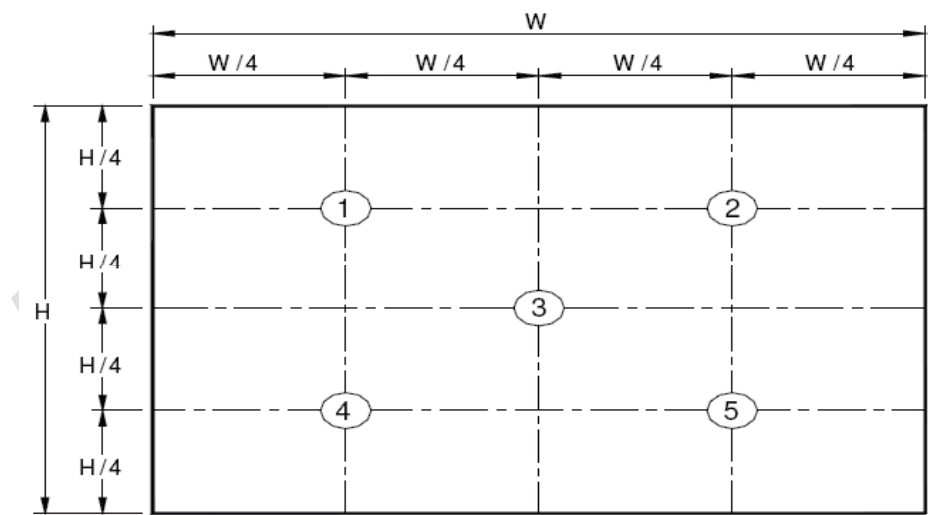

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.


BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 13 OF 33	

Figure 3. Uniformity Measurement Locations (13 points)

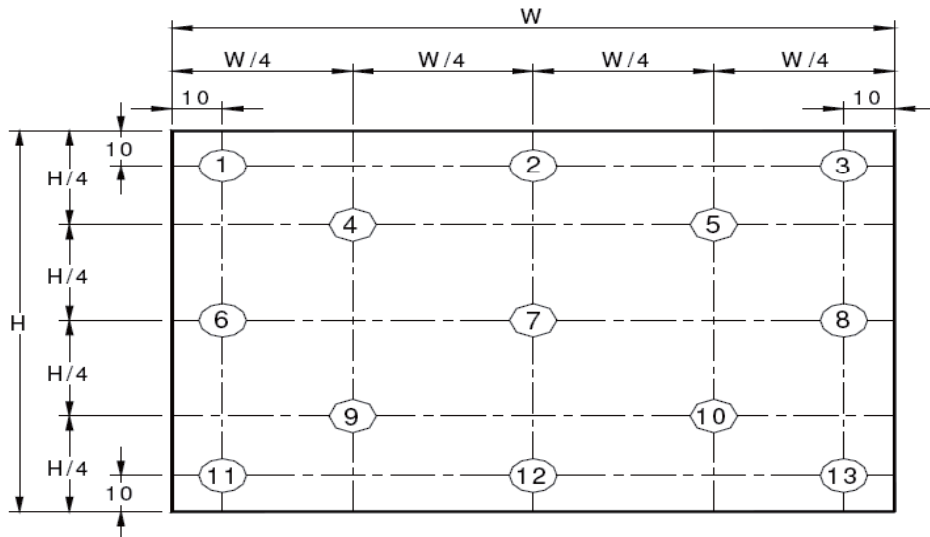

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5$ = Minimum Luminance of five points / Maximum Luminance of five points (see FIGURE 2) , $\Delta Y13$ = Minimum Luminance of 13 points /Maximum Luminance of 13 points (see FIGURE 3).


Figure 4. Response Time Testing

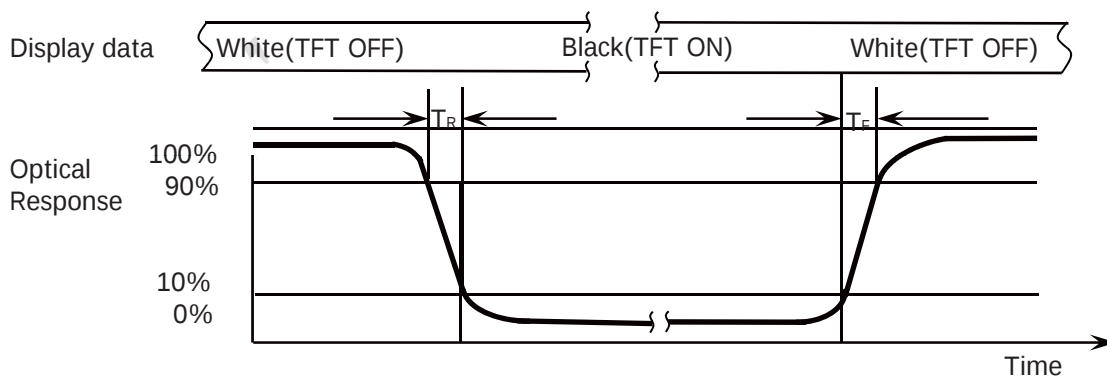

The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_d and 90% to 10% is T_r .

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 14 OF 33

Figure 5. Cross Modulation Test Description

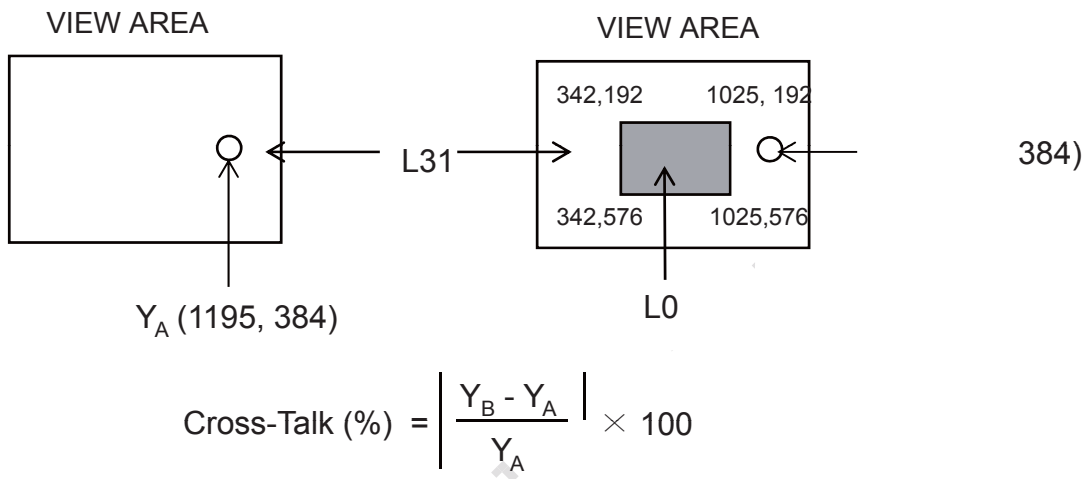

Where:

Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 15 OF 33	

5.0 INTERFACE CONNECTION.

5.1 Electrical Interface Connection


The electronics interface connector is STM. The mating connector part number is I-PEX 20454-030T or Compatible. The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	NC	No Connection
2	H_GND	Ground
3	LANE1_N	eDP RX channel 1 negative
4	LANE1_P	eDP RX channel 1 positive
5	H_GND	Ground
6	LANE0_N	eDP RX channel 0 negative
7	LANE0_P	eDP RX channel 0 positive
8	H_GND	Ground
9	AUX_CH_P	eDP AUX CH positive
10	AUX_CH_N	eDP AUX CH negative
11	H_GND	Ground
12	LCD_VCC	Power Supply, 3.3V (typ.)
13	LCD_VCC	Power Supply, 3.3V (typ.)
14	LCD_Self_Test	Panel self test enable
15	H_GND	Ground
16	H_GND	Ground
17	HPD	Hot plug detect output
18	BL_GND	LED Ground
19	BL_GND	LED Ground
20	BL_GND	LED Ground
21	BL_GND	LED Ground
22	BL_ENABLE	LED enable pin(+3.3V Input)
23	BL_PWM	System PWM Signal Input
24	NC	No Connection
25	NC	No Connection
26	BL_POWER	LED Power Supply 5V-21V
27	BL_POWER	LED Power Supply 5V-21V
28	BL_POWER	LED Power Supply 5V-21V
29	BL_POWER	LED Power Supply 5V-21V
30	NC	No Connection

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 16 OF 33	

5.2. eDP Interface

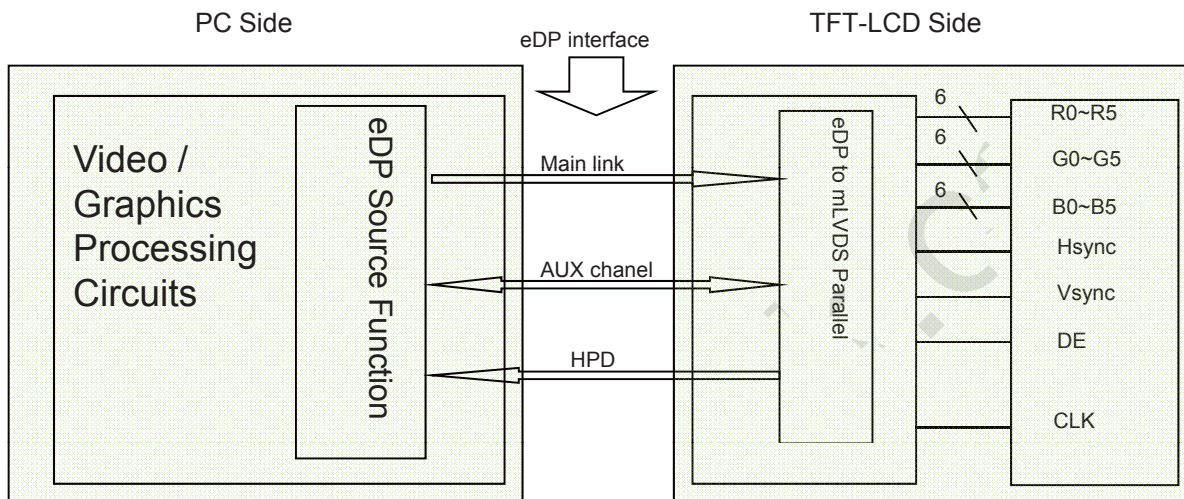

Note. Transmitter : Parade DP501 or equivalent.
Transmitter is not contained in Module.

5.3.eDP Input signal

Lane 0	Lane 1
R0-5:0 G0-5:4	R1-5:0 G1-5:4
G0-3:0 B0-5:2	G1-3:0 B1-5:2
B0-1:0 R2-5:0	B1-1:0 R3-5:0
G2-5:0 B2-5:4	G3-5:0 B3-5:4
B2-3:0 R4-5:2	B3-3:0 R5-5:2
R4-1:0 G4-5:0	R5-1:0 G5-5:0
B4-5:0 R6-5:4	B5-5:0 R7-5:4
R6-3:0 G6-5:2	R7-3:0 G7-5:2
R6-1:0 G6-5:0	R7-1:0 G7-5:0

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 17 OF 33

5.4 Back-light & LCM Interface Connection

Interface Connector: **CRT F10401-1093**

<Table 7. Pin Assignments for the BLU & LCM Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED1	LED cathode connection	6	NC	No Connection
2	LED2	LED cathode connection	7	Vout	LED anode connection
3	LED3	LED cathode connection	8	Vout	LED anode connection
4	NC	No Connection	9	Vout	LED anode connection
5	NC	No Connection			

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 18 OF 33

6.0 SIGNAL TIMING SPECIFICATION

6.1 Timing Parameters

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	100	140.25	160	MHz
	High Time	Tch	-	4/7	-	Tc
	Low Time	Tcl	-	3/7	-	Tc
Frame Period		Tv	1090	1100	1238	lines
			-	60	-	Hz
			-	16.7	-	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2080	2142	2400	clocks
Horizontal Display Period		Thd	-	1920	-	clocks

Note*: This Module can support low frame refresh rate 50Hz & 40Hz.


BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 19 OF 33	

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 8.

<Table 8. eDP Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock	ssc		0.5		%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	100	0	1320	mV	
Rx input DC common mode voltage	VRX_DC_CM	-	GND	-	V	
Differential termination resistance	RRX-DIFF	80	-	100	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-	-	20	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_INTRA_PAIR	-	-	150	ps	

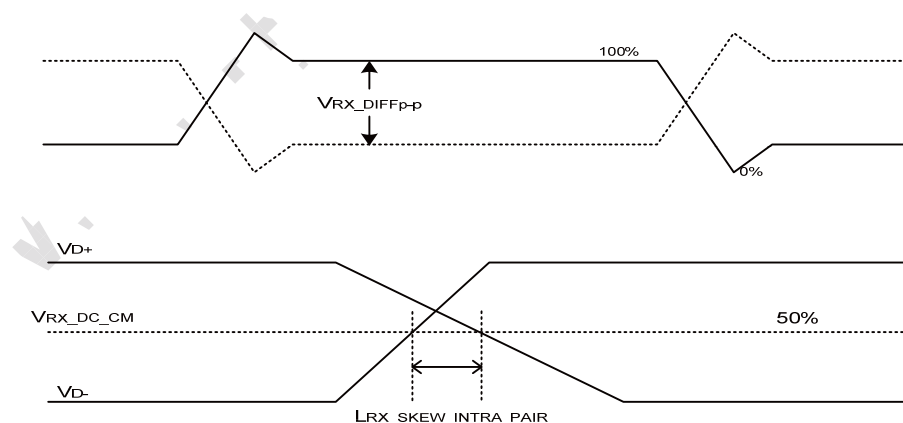

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 20 OF 33	


7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

	Colors & Gray scale	Data signal																							
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray scale Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△ Darker	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△ ▽	↑ ↓								↑ ↓								↑ ↓							
		Brighter ▽	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	0		1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Gray scale Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
△ Darker		0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0
△ ▽		↑ ↓								↑ ↓								↑ ↓							
		Brighter ▽	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0
0			0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Green		0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray scale Blue		Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△ Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	△ ▽	↑ ↓								↑ ↓								↑ ↓							
		Brighter ▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1
	0		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Gray scale of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
△ Darker		1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
		0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0
△ ▽		↑ ↓								↑ ↓								↑ ↓							
		Brighter ▽	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1
0			1	1	1	1	1	1	1	1	0	1	1	1	1	1	1	0	0	1	1	1	1	1	1
		White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 21 OF 33

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

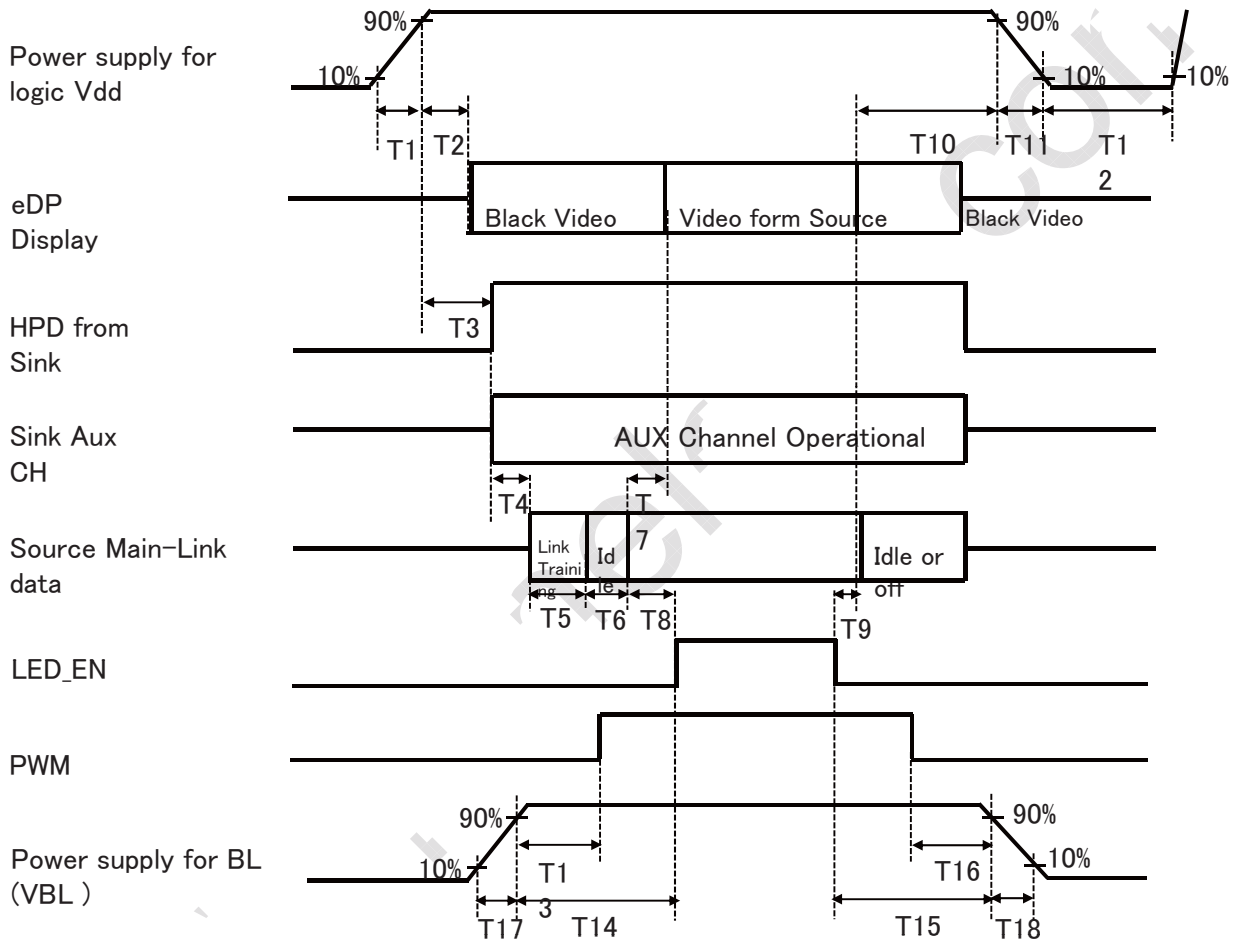

- $0.5\text{ms} \leq T1 \leq 10\text{ ms}$
- $0\text{ms} \leq T2 \leq 200\text{ ms}$
- $0\text{ms} \leq T3 \leq 200\text{ ms}$
- $0\text{ms} \leq T13$
- $0\text{ms} \leq T14$
- $0\text{ms} \leq T17$
- $0\text{ms} \leq T7 \leq 50\text{ms}$
- $0\text{ms} \leq T10 \leq 500\text{ ms}$
- $0\text{ ms} \leq T11 \leq 10\text{ ms}$
- $150\text{ms} \leq T12$
- $0\text{ms} \leq T15$
- $0\text{ms} \leq T16$
- $0\text{ms} \leq T18$

Notes:

- When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 22 OF 33

9.0 Connector Description

Physical interface is described as for the connector on LCM.

These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

Connector Name /Description	For Signal Connector
Manufacturer	STM
Type/ Part Number	MSAK24025P30
Mating housing/ Part Number	I-PEX 20454-030T or Compatible

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 23 OF 33	

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

FIGURE 6 shows mechanical outlines for the model HB125WX1-201.
Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	276.48 (H) × 155.52(V)	
Number of pixels	1920 (H) X 1080 (V) (1 pixel = R + G + B dots)	
Pixel pitch	0.048(H) X 0.144 (V)	
Pixel arrangement	RGB Vertical stripe	
Display colors	16.8M	
Display mode	Normally black	
Dimensional outline	282.4(H)*179.32(V)(W/PCB)*2.3(Max)	mm
Weight	170 (Max)	gram
Back Light	Connector :CRT F10401-1093	
	LED, Horizontal-LED Array type	

FIGURE 6.

10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti glare coating to maximize readability and hard coating to reduce scratching.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 24 OF 33	

11.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 °C, 80%RH, 240 hrs
4	High temperature operation test	Ta = 50 °C, 240 hrs
5	Low temperature operation test	Ta = 0 °C, 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle
7	Vibration test (non-operating)	1.5G, 10~500Hz, Half Sine X,Y,Z / Sweep rate : 1 hour
8	Shock test (non-operating)	220G, Half Sine Wave 2msec ± X, ± Y, ± Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV

12.0 HANDLING & CAUTIONS

(1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

(3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 25 OF 33	

(4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

(5) Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

(6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

13.0 LABEL

(1) Product label



Label Size: 48mm × 12mm,
Thickness : 0.08mm

1. FG-CODE
2. MDL ID
3. PPID
4. MDL ID Barcode
5. PPID QRCode

No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
code	M	D	1	0	0	0	0	0	0	4	2	3	7	Y	M	D	X	X	X	X
Describe	PPID													Y	M	D	Serial number			

序列号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
代码	X	X	P	3	X	X	X	3	9	4	2	X	X	X	X	X	X
描述	GBN CODE		GRADE	B3	Y	M	D	Last 4 digit of FG Code				Serial number					

Y: 2015—5, 2016—6 2020---0, 2021---1...

M: 1~12月→ 1~9, A, B, C

D: 1~31 → 1~9, A~V Without : I, O, Q, U)

SERIERS: 0~9, A~Z (Without : I, O, Q, U)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 26 OF 33	

(2) Box label

Label Size: 110 mm (L) × 55 mm (W)

Contents

Model: NV125FHM-N82

Q'ty: Module Q'ty in one box

Serial No.: Box Serial No. See next figure for detail description.

Date: Packing Date

Internal use of Product

PPID

BOE BOE Technology Group Co., Ltd.

MODEL: NV125FHM-N82 ① QTY: XX ②
SERIAL NO: XXXXXXXXXXXX ③ DATE: 20XX / XX / XX ④

MD10000004237 ⑥ XXXX ⑤





No.	1	2	3	4	5	6	7	8	9	10	11	12	13
code	X	X	X	X	X	X	X	X	X	X	X	X	X
Describe	GBN code		Grade	B3	Year		Month	Rev	Serial number				

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 27 OF 33

14.0 PACKING INFORMATION

14.1 Packing order

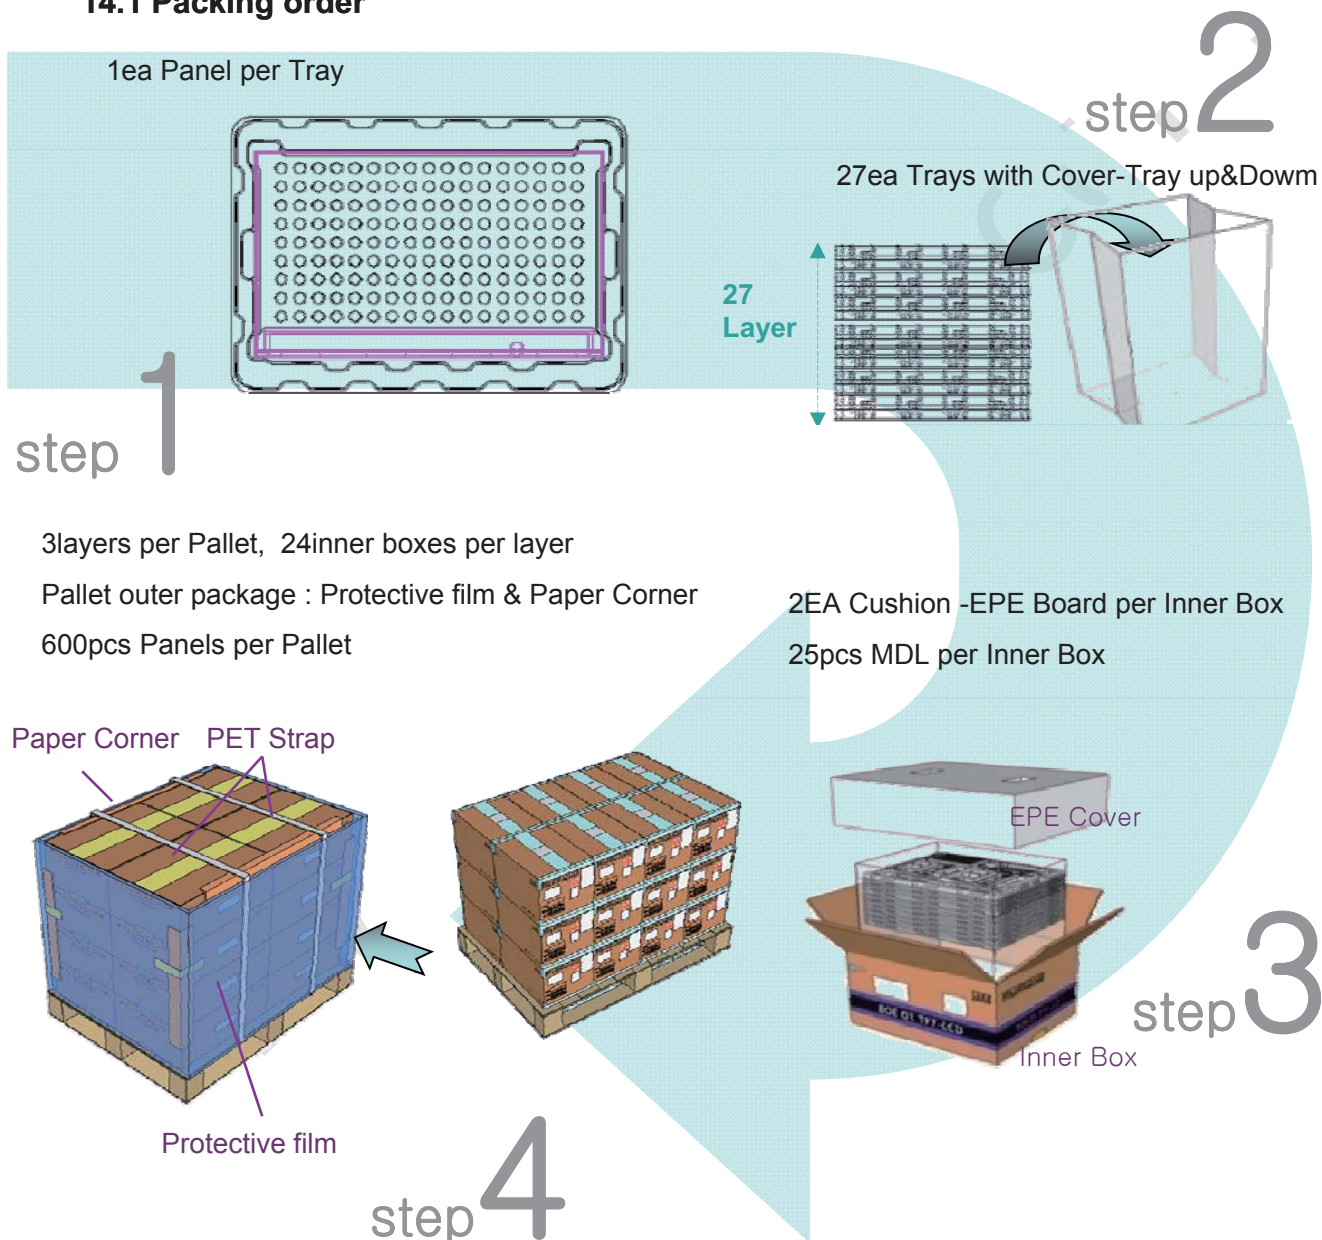


14.2 Notes

- Box Dimension: 375mm(W) x 280mm(D) x 290mm(H)
- Package Quantity in one Box: 25pcs

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 28 OF 33	


15.0 MECHANICAL OUTLINE DIMENSION

Figure 6. TFT-LCD Module Outline Dimensions (Front view)

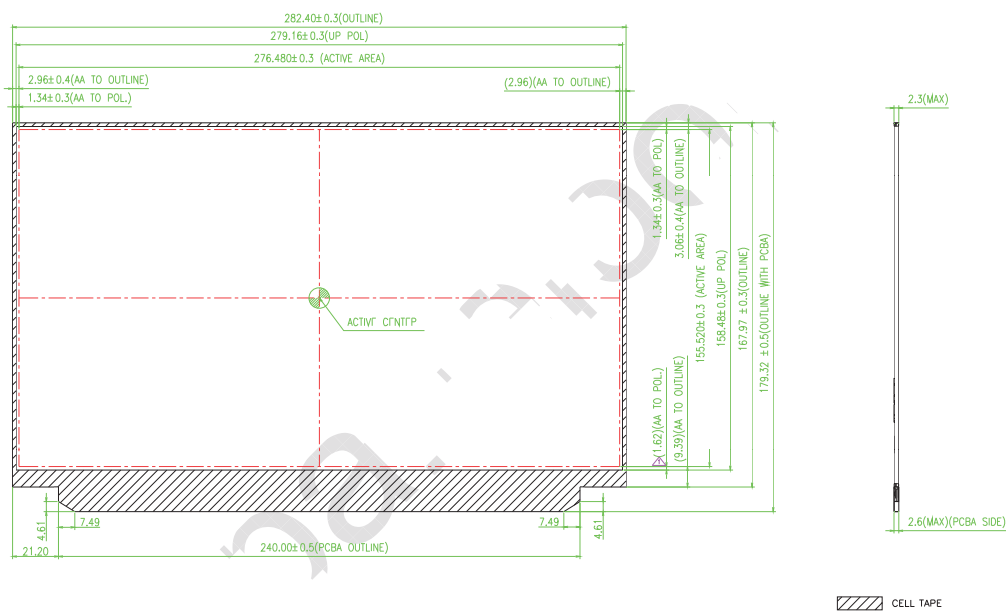

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 29 OF 33

Figure 7. TFT-LCD Module Outline Dimensions (Rear view)

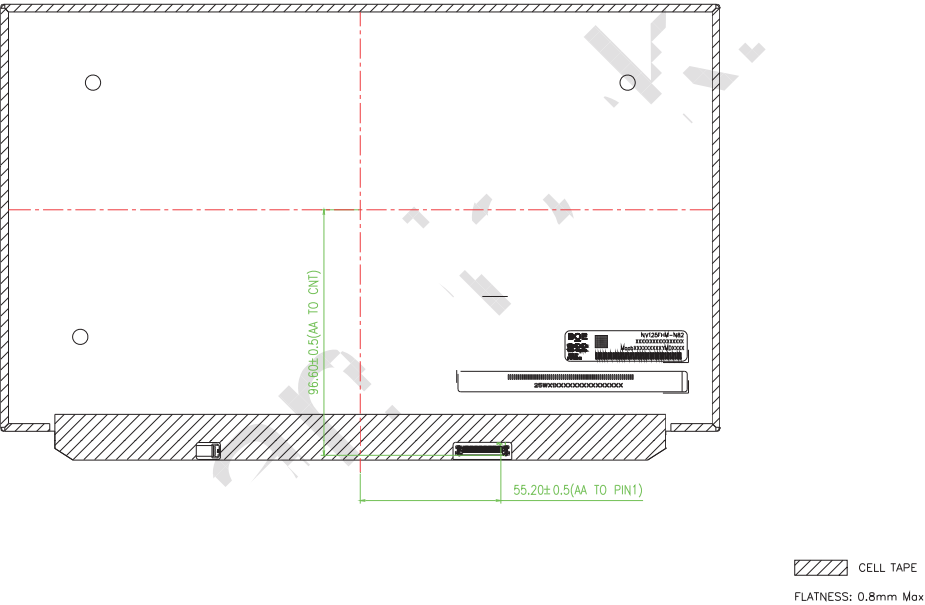

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 30 OF 33	

16.EDID Table

Address (HEX)	Function	Hex	Dec	Input values.	Notes
00	Header	00	0	0	EDID Header
01		FF	255	255	
02		FF	255	255	
03		FF	255	255	
04		FF	255	255	
05		FF	255	255	
06		FF	255	255	
07		00	0	0	
08	ID Manufacturer Name	09	9	BOE	ID = BOE
09		E5	229		
0A	ID Product Code	91	145	1681	ID = 1681
0B		06	6		
0C	32-bit serial No.	00	0		
0D		00	0		
0E		00	0		
0F		00	0		
10	Week of manufacture	01	1	1	
11	Year of Manufacture	19	25	2015	Manufactured in 2015
12	EDID Structure Ver.	01		1	EDID Ver 1.0
13	EDID revision #	04	4	4	EDID Rev. 0.4
14	Video input definition	A5	165	-	
15	Max H image size	1C	28	28	28 cm (Approx)
16	Max V image size	10	16	16	16 cm (Approx)
17	Display Gamma	78	120	2.2	Gamma curve = 2.2
18	Feature support	02	2		RGB display, Preferred Timming mode
19	Red/Green low bits	F6	246	-	Red / Green Low Bits
1A	Blue/White low bits	A0	160	-	Blue / White Low Bits
1B	Red x high bits	99	153	0.601	Red (x) = 10011001 (0.601)
1C	Red y high bits	59	89	0.351	Red (y) = 01011001 (0.351)
1D	Green x high bits	51	81	0.318	Green (x) = 01010001 (0.318)
1E	Green y high bits	94	148	0.581	Green (y) = 10010100 (0.581)
1F	Blue x high bits	2D	45	0.178	Blue (x) = 00101101 (0.178)
20	Blue y high bits	1F	31	0.124	Blue (y) = 00011111 (0.124)
21	White x high bits	50	80	0.313	White (x) = 01010000 (0.313)
22	White y high bits	54	84	0.329	White (y) = 01010100 (0.329)
23	Established timing 1	00	0	-	
24	Established timing 2	00	0	-	

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification	PAGE 31 OF 33	

16.EDID Table

25	Established timing 3	00	0	-	
26	Standard timing #1	01	1		Not Used
27		01	1		
28	Standard timing #2	01	1		Not Used
29		01	1		
2A	Standard timing #3	01	1		Not Used
2B		01	1		
2C	Standard timing #4	01	1		Not Used
2D		01	1		
2E	Standard timing #5	01	1		Not Used
2F		01	1		
30	Standard timing #6	01	1		Not Used
31		01	1		
32	Standard timing #7	01	1		Not Used
33		01	1		
34	Standard timing #8	01	1		Not Used
35		01	1		
36	Detailed timing/monitor descriptor #1	C9	201	140.3	140.25MHz Main clock
37		36	54		
38		80	128	1920	Hor Active = 1920
39		CD	205	205	Hor Blanking = 205
3A		70	112	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		38	56	1080	Ver Active = 1080
3C		14	20	20	Ver Blanking = 20
3D		40	64	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		30	48	48	Hor Sync Offset = 48
3F		20	32	32	H Sync Pulse Width = 32
40		36	54	3	V sync Offset = 3 line
41		00	0	6	V Sync Pulse width : 6 line
42		18	24	280	Horizontal Image Size = 280 mm (Low 8 bits)
43		A5	165	165	Vertical Image Size = 165 mm (Low 8 bits)
44		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0	0	Hor Border (pixels)
46		00	0	0	Vertical Border (Lines)
47		1A	26		Refer to right table

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 32 OF 33

16.EDID Table

48	Detailed timing/monitor descriptor #2	D4	212	112.2	112.2MHz Main clock
49		2B	43		
4A		80	128	1920	Hor Active = 1920
4B		CD	205	205	Hor Blanking = 205
4C		70	112	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4D		38	56	1080	Ver Active = 1080
4E		14	20	20	Ver Blanking = 20
4F		40	64	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
50		64	100	100	Hor Sync Offset = 100
51		64	100	100	H Sync Pulse Width = 100
52		44	68	20	V sync Offset = 20 line
53		05	5	20	Sync Pulse width : 20 line
54		18	24	280	Horizontal Image Size = 280 mm (Low 8 bits)
55		A5	165	165	Vertical Image Size = 165 mm (Low 8 bits)
56		10	16		4 bits of Hor Image Size + 4 bits of Ver Image Size
57		00	0	0	Hor Border (pixels)
58		00	0	0	Vertical Border (Lines)
59		1A	26		
5A	Detailed timing/monitor descriptor #3	00	0		Nvidia nvDPS Lowest refresh rate that does not cause any visual/optical side effect
5B		00	0		
5C		00	0		
5D		00	0		
5E		00	0		
5F		00	0		
60		00	0		
61		00	0		
62		00	0		
63		00	0		
64		00	0		
65		00	0		
66		00	0		
67		00	0		
68		00	0		
69		00	0		
6A		00	0		
6B		00	0		

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	6	2017.10.30
SPEC. NUMBER S8-65-6A-47	SPEC. TITLE NV125FHM-N82 Product Specification		PAGE 33 OF 33

16.EDID Table

6C	Detailed timing/monitor descriptor #4	00	0	0	Detailed Timing Description #4
6D		00	0	0	Flag
6E		00	0	0	Reserved
6F		02	2		For Brightness Table and Power consumption
70		00	0	0	Flag
71		0C	12		PWM % [7:0] @ Step
72		43	67		PWM % [7:0] @ Step 5
73		F9	249		PWM % [7:0] @ Step 10
74		0B	11		Nits [7:0] @ Step 0
75		3C	60		Nits [7:0] @ Step 5
76		6E	110		Nits [7:0] @ Step 10
77		1E	30		Panel Electronics Power @32x32 Chess Pattern=
78		16	22		Backlight Power @60 nits=
79		28	40		Backlight Power @Step 10=
7A		6F	111		Nits @ 100% PWM Duty =
7B		00	0	0	Flags
7C		00	0	0	Flags
7D		00	0	0	Flags
7E	Extension flag	00	0		
7F	Checksum	EB	235	-	