

INDUSTRIAL STRENGTH... Start Your Application From **YOURITECH**

Integration support

Obsolescence Management

PCAP

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Production Custom designs Installation

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Optical Bonding

Cover glass

System solutions

OEM Solutions

Custom Display

Mechanical design



SPECIFICATION

[☒] Preliminary Specification
[] Final Specification

Description 7” 1024xRGBx600 TFT-LCD Module
Part Number P0700WSF2ME00

Customer		Product Dept, PDBU Tianma Microelectronics Co., Ltd.	
Signatures	Date	Approved By	Date
		Kevin Kim	2024-Mar-20
		Reviewed By	
		Longping Deng	2024-Mar-20
		Prepared By	
		Yao Zhang	2024-Mar-20
Comments:			

* This cover page is for your Comments and Signatures back to TIANMA.

[illegible]

CONTENTS

1. SUMMARY.....	1
1.1 General Description.....	1
1.2 Features.....	1
2. GENERAL SPECIFICATIONS.....	2
3. INPUT / OUTPUT TERMINALS.....	3
3.1 CN1 Pin assignment (LCD Interface).....	3
3.2 U/D R/L Function Description.....	4
4. ABSOLUTE MAXIMUM RATINGS	5
5. ELECTRICAL CHARACTERISTICS	6
5.1 DC Characteristics for Panel Driving.....	6
5.2 DC Characteristics for Backlight Driving.....	7
5.3 Recommended Power ON/OFF Sequence.....	7
5.4 LCD Module Block Diagram	8
6. TIMING CHARACTERISTICS	9
6.1 AC characteristics.....	9
6.2 Data Input Timing Parameter Setting	10
6.3 DE Mode Timing Diagram	10
6.4 LVDS data mapping.....	11
7. OPTICAL CHARACTERISTICS	12
8. RELIABILITY TEST.....	15
9. MECHANICAL DRAWING	16
10. PACKING INSTRUCTION.....	17
11. MODULE LABEL.....	18
QR code content:	18
12. PRECAUTIONS FOR USE OF LCD MODULES.....	18
12.1 Handling Precautions.....	19
12.2 Storage precautions.....	19
12.3 Transportation Precautions	19
12.4 Screen saver Precautions.....	19
12.5 Safety Precautions	19

1. Summary

1.1 General Description

This is a 7 inch a-Si TFT-LCD module with Normal- Black technology. It is composed of a TFT-LCD panel, a driver circuit, and a LED backlight unit.

1.2 Features

- Ultra-wide viewing angle
- Interface: LVDS
- Acquisition product for UL62368-1/CSA C22.2 No.62368-1-03 (File number: TBD)
- Compliant with the European RoHS Directive (2011/65/EU) and Delegated Directive (2015/863/EU, Amending Annex II of 2011/65/EU)

2. General Specifications

Feature		Spec	Unit
Display Spec	Size	7 inches	
	Resolution	1024(RGB)x600	
	Pixel Pitch	0.150x0.150	mm
	TFT Active Area	153.6 x 90	mm
	Technology Type	a-Si	
	Pixel Configuration	R.G.B Vertical Stripe	
	Display Mode	SFT, Normally Black	
	Surface Treatment	AG	
	Viewing Direction	All	
	Gray Scale Inversion Direction	NA	
Mechanical Characteristics	LCM (W x H x D)	164.5*104.2*3.5	mm
	Weight	TBD+/-5%	g
Optical Characteristics	Luminance	Typ 500	cd/m ²
	Contrast Ratio	Typ 900:1	
	NTSC	Typ 50	%
	Viewing Angle	R/L/U/D: typ 88/88/88/88	degree
Electrical Characteristics	Interface	LVDS	
	Color Depth	16.7 Million	color
	Power Consumption	LCD:TBD; Backlight:TBD	mW

Table 2.1 General TFT Specifications

3. Input / Output Terminals

3.1 CN1 Pin assignment (LCD Interface)

Connector Information	
LCD Module connector	-
Matching connector	FH28-40S-0.5SH(05)

Table 3.1.1 Connector information

No	Symbol	I/O	Description	Comment
1	GND	P	Ground	
2	NC	N	Not Connection	
3	VDD	P	Power supply for circuits	
4	VDD	P	Power supply for circuits	
5	VDD	P	Power supply for circuits	
6	NC	N	Not Connection	
7	UPDN	I	Vertical Reverse Scan Control	
8	SHLR	I	Horizontal Reverse Scan Control	
9	GND	P	Ground	
10	STBYB	I	Standby mode selection.	
11	GND	P	Ground	
12	RESET	I	Global reset pin, active low	
13	GND	P	Ground	
14	SDI	I/O	Serial Interface address and data input/output (Please keep NC)	
15	SCL	I	Serial Interface clock input (Please keep NC)	
16	CSB	I	Serial Interface chip enable signal. (Please keep NC)	
17	GND	P	Ground	
18	GND	P	Ground	
19	D3P	I	LVDS receiver positive signal channel 3	
20	D3N	I	LVDS receiver negative signal channel 3	
21	GND	P	Ground	
22	D2P	I	LVDS receiver positive signal channel 2	
23	D2N	I	LVDS receiver negative signal channel 2	
24	GND	P	Ground	
25	CKP	I	LVDS receiver positive signal clock	
26	CKN	I	LVDS receiver negative signal clock	
27	GND	P	Ground	
28	D1P	I	LVDS receiver positive signal channel 1	
29	D1N	I	LVDS receiver negative signal channel 1	

30	GND	P	Ground	
31	D0P	I	LVDS receiver positive signal channel 0	
32	D0N	I	LVDS receiver negative signal channel 0	Note1
33	GND	P	Ground	Note1
34	GND	P	Ground	Note1
35	NC	N	Not Connection	
36	LEDA	P	Power supply for circuits	
37	LEDA	P	Power supply for circuits	
38	NC	N	Not Connection	
39	LEDK	P	Power supply for circuits	
40	LEDK	P	Power supply for circuits	

Table 3.1.2 Pin Assignment for LCD Interface

Note1: I/O definition: I---Input, O---Output, P---Power/Ground, N---No connection

Note2: All of the GND pins should be connected to the system ground.

Note3: This LCD module supports DE mode. Please refer to the descriptions.

3.2 U/D R/L Function Description

Scan control input		Scanning direction
UPDN	SHLR	
L	L	From up to down, From left to right
H	L	From down to up, From left to right
L	H	From up to down, From right to left
H	H	From down to up, From right to left

Note: L -----GND; H----3.3V

4. Absolute Maximum Ratings

Item	Symbol	MIN	MAX	Unit	Remark
Power Voltage	VDD	-0.3	3.96	V	Note1
Operating Temperature	Top	-20	70	°C	
Storage Temperature	Tst	-30	80	°C	
Relative Humidity Note2	RH	-	≤95	%	Ta≤40°C
		-	≤85	%	40°C < Ta≤50°C
		-	≤55	%	50°C < Ta≤60°C
		-	≤36	%	60°C < Ta≤70°C
		-	≤24	%	70°C < Ta≤80°C
Absolute Humidity	AH	-	≤70	g/m ³	Ta>70°C

Table 4.1 Absolute Maximum Ratings

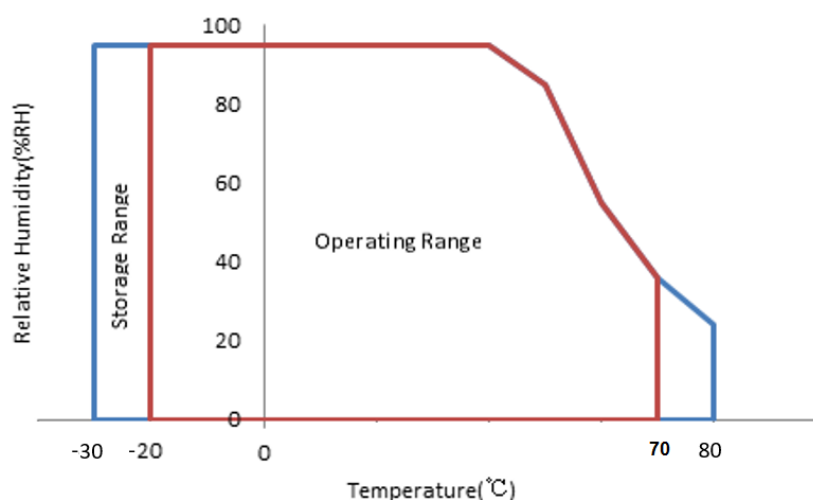


Figure4.1 Absolute Maximum Ratings chart

Note1: Input voltage include all in put data.

Note2: Ta means the ambient temperature. It is necessary to limit the relative humidity to the specified temperature range. Condensation on the module is not allowed.

Note3: The absolute maximum rating values of this product are not allowed to be exceeded at any times. A module should be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme condition, the module may be permanently destroyed

5. Electrical Characteristics

5.1 DC Characteristics for Panel Driving

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Supply Voltage	VDD	(3.0)	3.3	(3.6)	V	Include ripple
LVDS Differential input high threshold	R_{XVTH}	-	-	+37	mV	
LVDS Differential input low threshold	R_{XVTL}	-37	-	-	mV	
Differential input voltage	$ V_{ID} $	0.1	-	0.4	V	
LVDS input common mode voltage	R_{XVCM}	600	1200	1375	mV	$R_{XVCM}+1/2* V_{ID} \leq 1650$ mV $R_{XVCM}-1/2* V_{ID} \geq 400$ mV
Power Consumption	60Hz	P	-	TBD	mW	white pattern
VDD rush current	I_{rush}	-	-	1.5	A	


Table 5.1.1 Operating Voltages

Note1: Indicated the subsequent version may be updated.

Note2: LVDS DC characteristics.


Single-end Signals

$n=0,1,2,3$

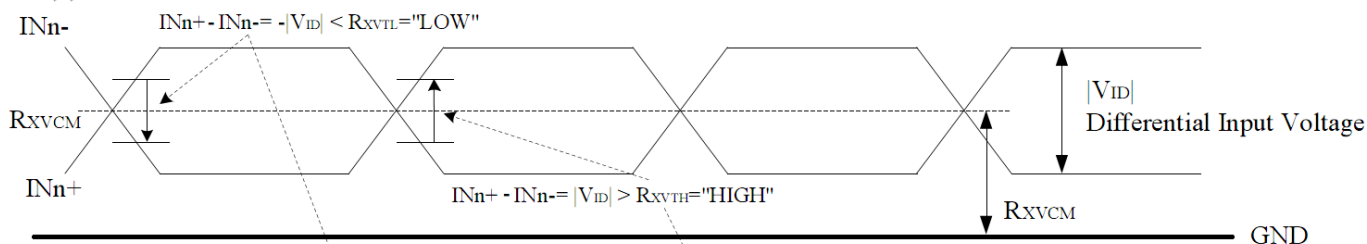


Differential Signals

$INn+ - INn-$
 $n=0,1,2,3$

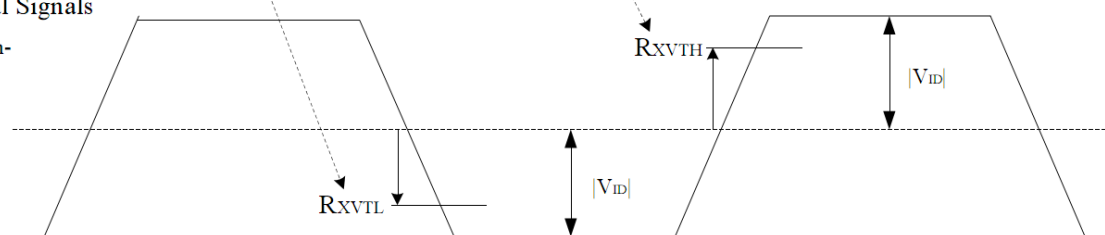

Note3: Inrush current test condition.

VDD rising time is 470 μ s

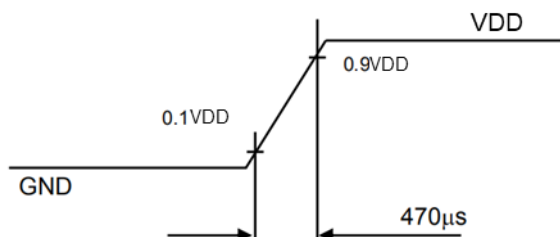

5.2 DC Characteristics for Backlight Driving

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Forward Current	IF	-	60	-	mA	27 LEDs (3 LED Parallel, 9 LED Serial)
Forward Current Voltage	VF	24.3	27	28.8	V	Ta=25℃, IF=60mA
		24.8	27.5	29.4		Ta=-20℃, IF=60mA
		17.6	19.5	20.8		Ta=70℃, IF=60mA
Backlight Power Consumption	WBL	-	1620	-	mW	
LED life time	-	20000	30000	-	Hrs	

Table 5.2.1 LED Backlight Characteristics

Note1: I_F is defined for each channel.

Note2: Optical performance should be evaluated at Ta=25℃ only.

Note3: If LED is driven by high current, high ambient temperature & humidity condition, The life time of LED will be reduced.

Note4: Operating life means brightness goes down to 50% of initial brightness. Typical operating life time is estimated data.



LED CIRCUIT

(If=3*20mA / Vf=27V TYP)

5.3 Recommended Power ON/OFF Sequence

Item	Symbol	Min	Typ	Max	Unit	Remark
VDD 10% to VDD 90%	Tp0	0.47	-	5	ms	
VDD to signal starting	Tp1	20	-	50	ms	
Signal starting to VLED on	Tp2	200	-	-	ms	
Signal off to VDD	Tp3	50	-	100	ms	
VLED off to signal off	Tp4	200	-	-	ms	
To next VDD	Tp5	2	-	-	S	
VDD to Signal stability	Tp6	80	-	-	ms	

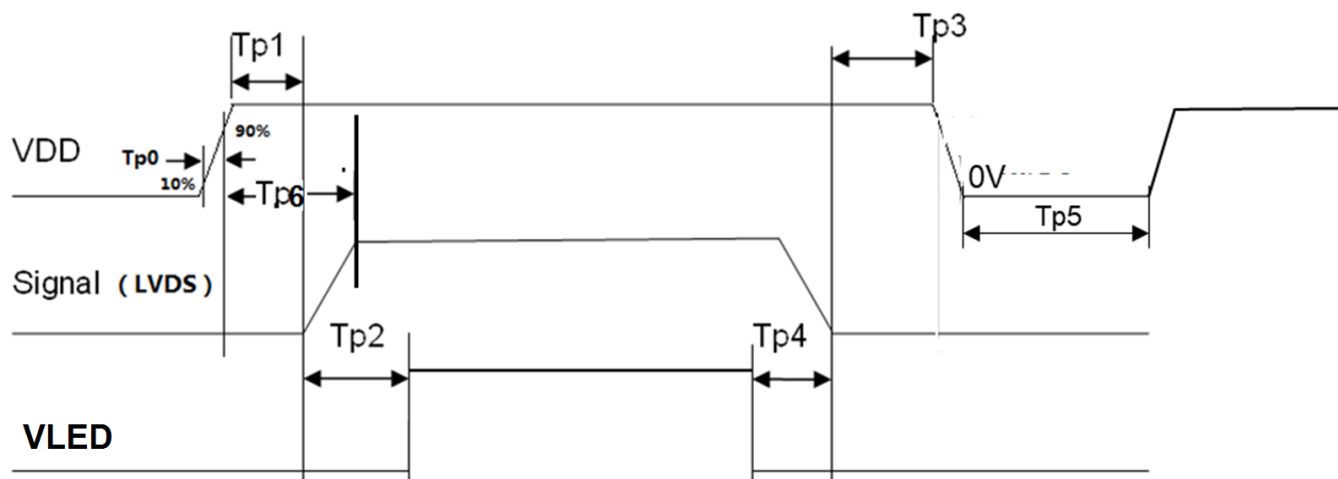


Figure 5.3.2 Power off sequence

Note1: The low level of these signals and analog powers are GND level.

Note2: All of the power and signals should be kept at GND level before power on. If there are residual voltages on them, the LCD might not work properly.

Note3: The power on/off sequence is the first version. It will be updated when the design is fixed.

5.4 LCD Module Block Diagram

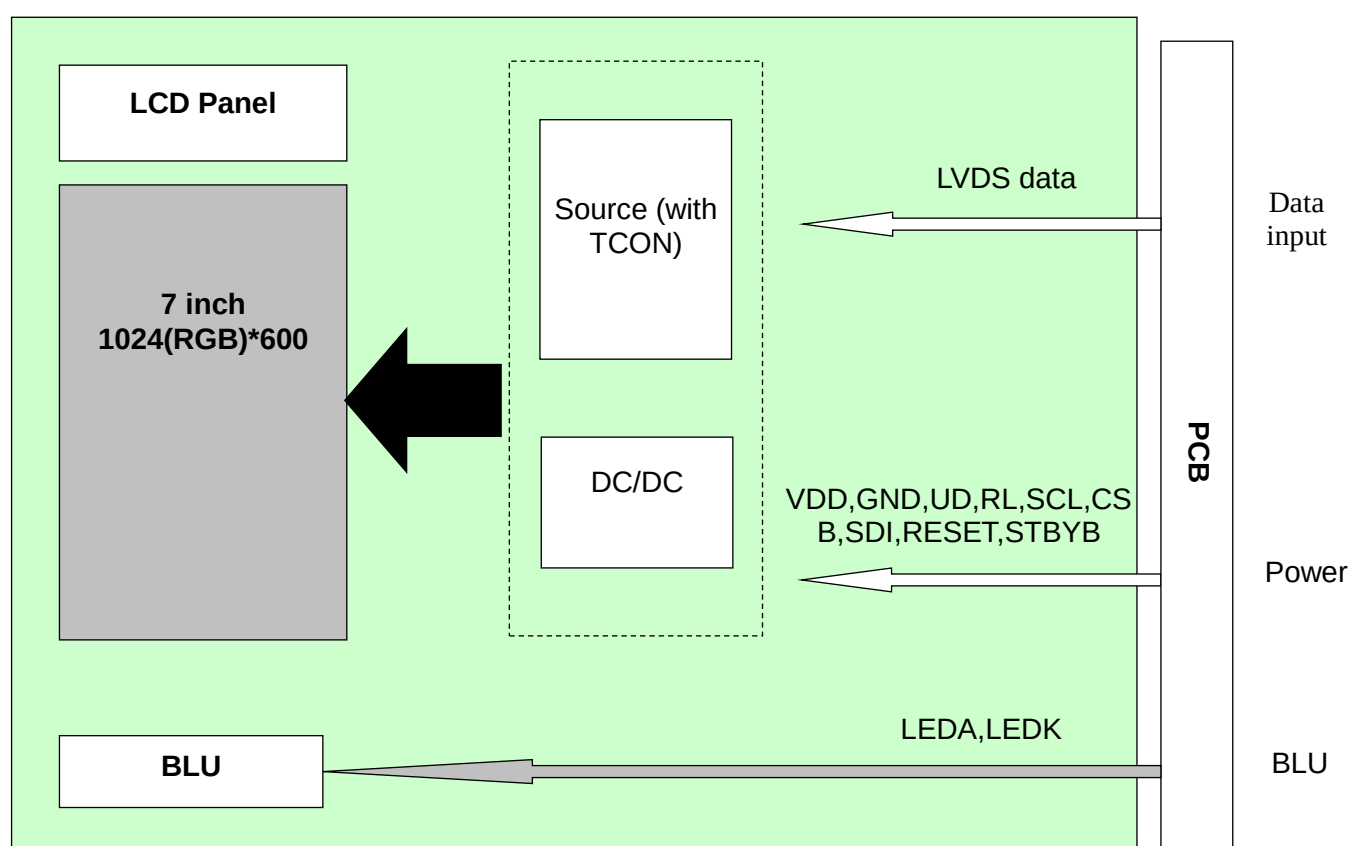


Figure 5.4.1 LCD Module Block Diagram

6. Timing Characteristics

6.1 AC characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Remark
Dclk Frequency	RxFCLK	46.2	-	59.0	MHZ	
Input Data Skew Margin	T _{RSKM}	-0.2	-	0.2	UI	[VID] = 200mV R _x VCM = 1.2V 1UI=1/(RxFCLKx7)
Clock High Time	T _{LVCH}	-	3.5/(7*RxFCLK)	-	ns	
Clock Low Time	T _{LVCL}	-	3.5/(7*RxFCLK)	-	ns	
PLL Wake-up Time	T _{emPLL}	-	-	150	us	

Table 6.1.1 AC characteristics

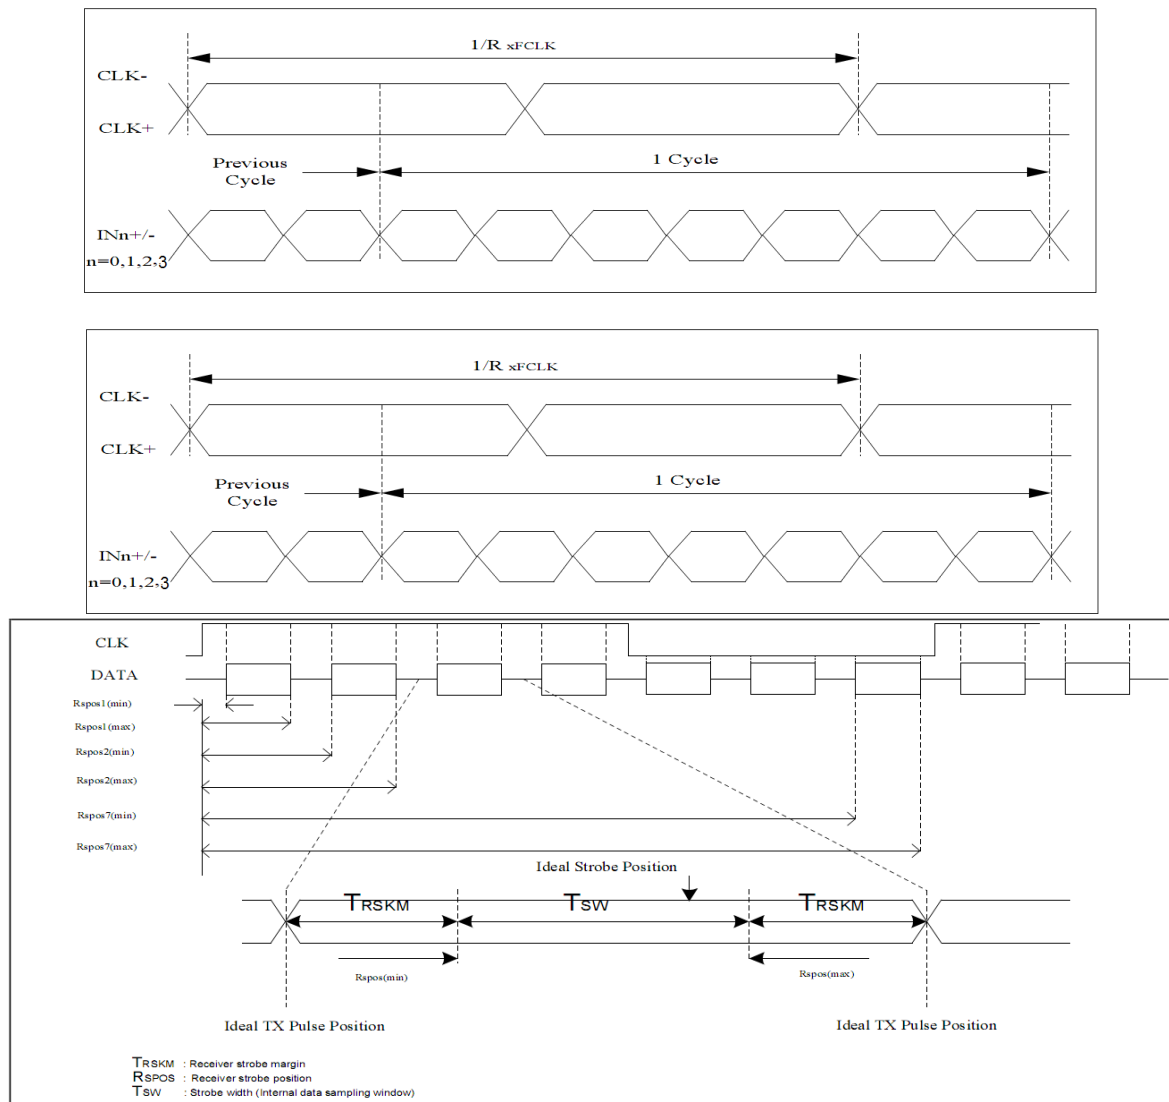


Figure 6.1.1 AC characteristics

6.2 Data Input Timing Parameter Setting

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remark
DCLK frequency		Fclk	(46.2)	51.2	(59.0)	MHz	Tclk=1/Fclk
Horizontal section	Horizontal total	TH	1229	1344	1372	Tclk	
	Horizontal blanking	Thb	110	160	160	Tclk	
	Valid Data Width	Thd	1024			Tclk	
Vertical section	Vertical total	TV	(627)	635	(717)	TH	
	Vertical blanking	Tvb	16	23	61	TH	
	Valid Data Width	Tvd	600			TH	
Frame Rate		F	60			HZ	

Table 6.2.1 Data Input Timing Parameters

6.3 DE Mode Timing Diagram

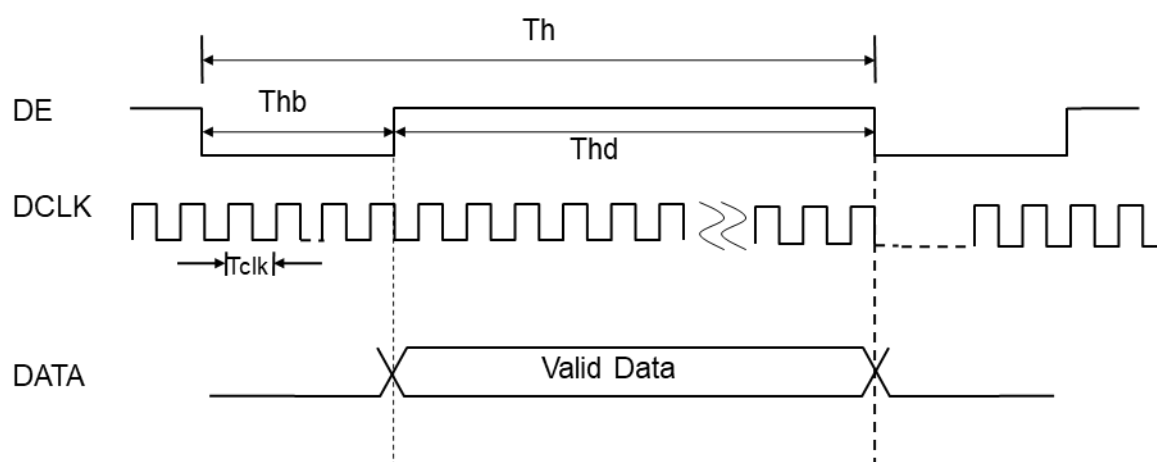
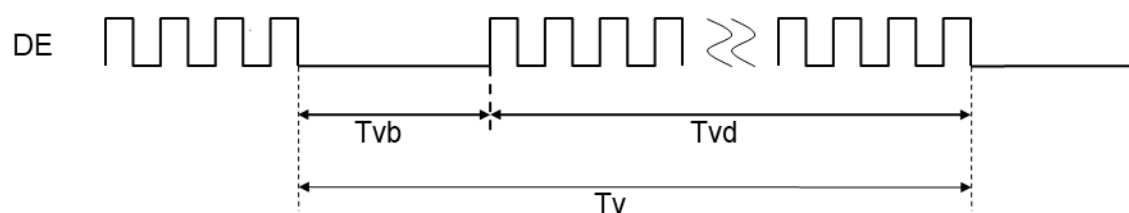


Figure 6.3.1 Data Input Timing Diagram Under SYNC Mode

6.4 LVDS data mapping

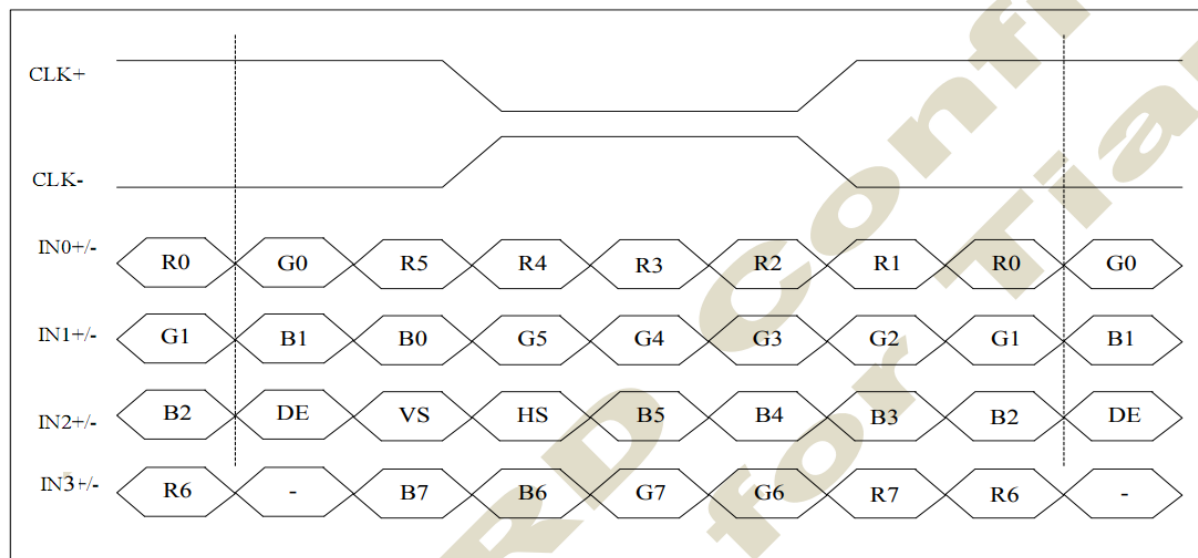


Figure 6.4.1 LVDS data mapping (VESA standard)

7. Optical Characteristics

Item		Symbol	Condition	Min	Typ	Max	Unit	Remark
View Angles		θT	CR ≥ 10	70	88	-	degree	Note2,3
		θB		70	88	-		
		θL		70	88	-		
		θR		70	88	-		
Contrast Ratio		CR	θ=0°	700	900	-		Note 3
Response Time		T _{ON}	25℃	-	30	35	ms	Note 4
		T _{OFF}						
Chromaticity	White	x	Backlight is on	0.253	0.303	0.353		Note 1,5
		y		0.284	0.334	0.384		
	Red	x		0.550	0.600	0.650		Note 1,5
		y		0.310	0.360	0.410		
	Green	x		0.285	0.335	0.385		Note 1,5
		y		0.545	0.595	0.645		
	Blue	x		0.105	0.155	0.205		Note 1,5
		y		0.075	0.125	0.175		
Uniformity		U		80	85	-	%	Note 6
NTSC		-		45	50	-	%	Note 5
Luminance		L		400	500	-	cd/m ²	Note 7

Table 7.1 Optical Parameters

Test Conditions:

1. $I_F = XX$ mA, and the ambient temperature is 25℃.
2. The test systems refer to Note1 and Note2.

Note: The content of Chromaticity is all reference values, and will be modified after the sample is produced.

Note1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 Minutes operation, the optical characteristics are measured at the center point of the LCD screen.

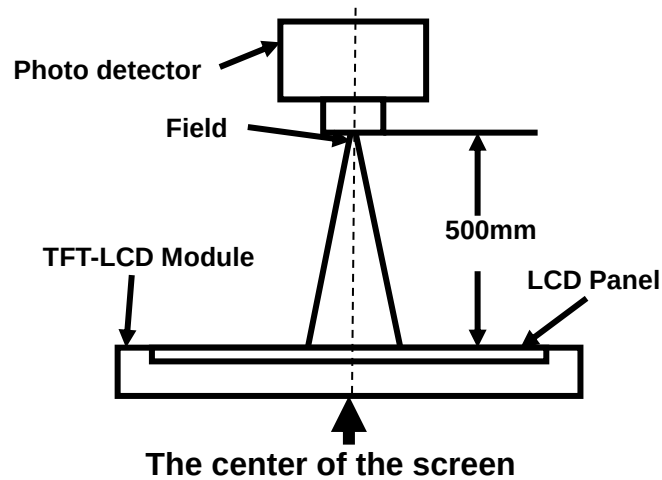


Fig1. Measurement Set Up

Note2: Definition of viewing angle range and measurement system. Viewing angle is measured at the center point of the LCD .

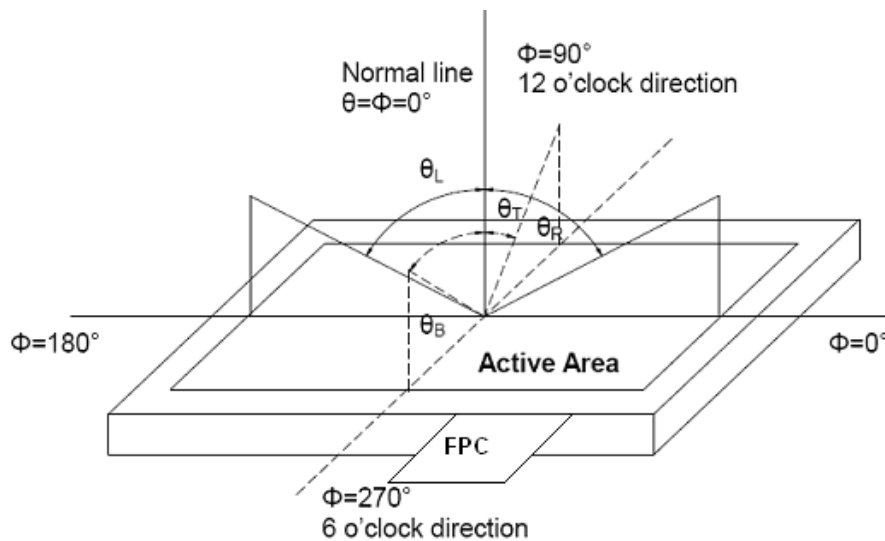


Fig2. Measurement viewing angle

Note3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$

Note4: Definition of Response time

For TN LCM, the response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (T_r) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_f) is the time between photo detector output intensity changed from 10% to 90%.

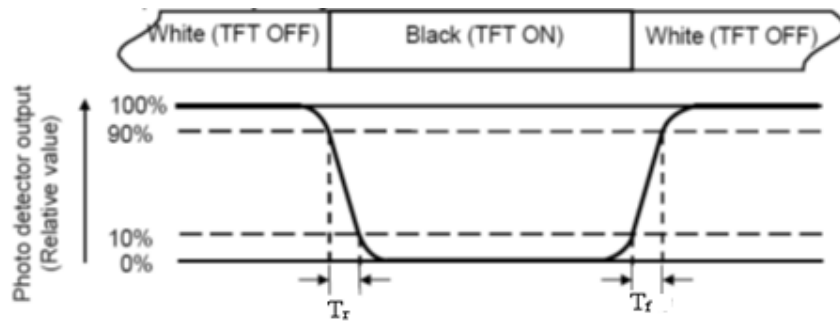


Fig3. Response Time Testing(TN)

For SFT LCM, the response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (T_r) is the time between photo detector output intensity changed from 10% to 90%. And fall time (T_f) is the time between photo detector output intensity changed from 90% to 10%.

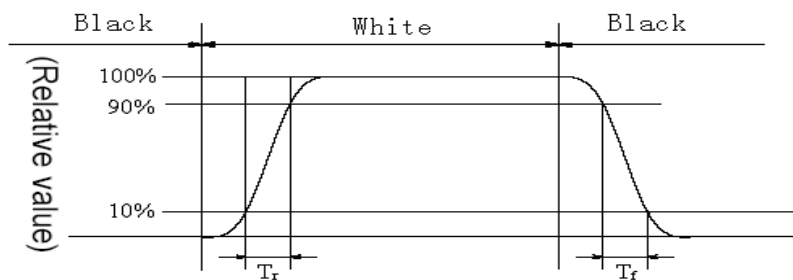


Fig4. Response Time Testing(SFT)

Note5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig.5). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (U) = L_{min} / L_{max}

L_{max} : The measured Maximum luminance of all measurement position.

L_{min} : The measured Minimum luminance of all measurement position.

L -----Active area length; W ----- Active area width

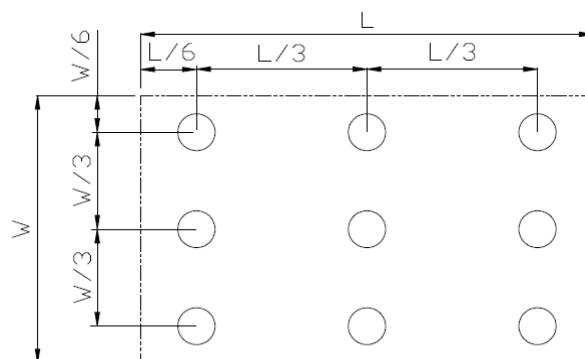


Fig5. Luminance Uniformity Measurement Locations(9 points)

Note7: Definition of Luminance:

Measure the luminance of white state at center point.

8. Reliability Test

No	Test Item	Condition	Remarks
1	High Temperature Operation	+70℃ , 240H	IEC60068-2-1:2007 GB2423.2-2008
2	Low Temperature Operation	-20℃ , 240H	IEC60068-2-1:2007 GB2423.1-2008
3	High Temperature Storage	+80℃ , 240H	IEC60068-2-1:2007 GB2423.2-2008
4	Low Temperature Storage	-30℃ , 240H	IEC60068-2-1:2007 GB2423.1-2008
5	Storage at High Temperature and Humidity(non-operation)	+60℃ , 90%RH , 240H	IEC60068-2-78 :2001 GB/T2423.3—2006
6	Thermal Shock (non-operation)	-30℃ , 30min~80℃ , 30min , change time : 5min , 100cycle	Start with cold temperature, End with high temperature, IEC60068-2-14:1984,GB2423.22-2002
7	ESD	C=150pF , R=330Ω , 5point/panel Air : ±8kv , 5times ; Contact : ±4kv , 5times ; (Environment : 15℃~35℃ , 30%~60% , 86Kpa~106Kpa)	IEC61000-4-2:2001 GB/T17626.2-2006
8	Vibration (Non-operation)	Frequency range:10~55Hz Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X.Y.Z. (6 hours for total)	IEC60068-2-6:1982 GB/T2423.10—1995
9	Shock (Non-operation)	Half Sine Wave 60G 6ms, ±X,±Y,±Z 3times for each direction	IEC60068-2-27:1987 GB/T2423.5—1995
10	Package Vibration	5-20-200HZ , PSD : 0.01-0.01-0.001 Total:0.781g2/HZ, x/y/z 30min)	IEC60068-2-34 GB/T2423.11
11	Package Drop Test	Height: X cm,1 corner, 3edges, 6 surfaces Note : X > 10Kg:60cm ; ≤10Kg:80cm	IEC60068-2-32:1990 GB/T2423.8—1995


Table 8.1 RA test condition

Note1: Temperature is the ambient temperature of sample

Note2: Before cosmetic and function test, the product must have enough recovery time, at least 24 hours at room temperature.


Note3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product's function only be guaranteed, but not for all of the cosmetic specification.

9. Mechanical Drawing

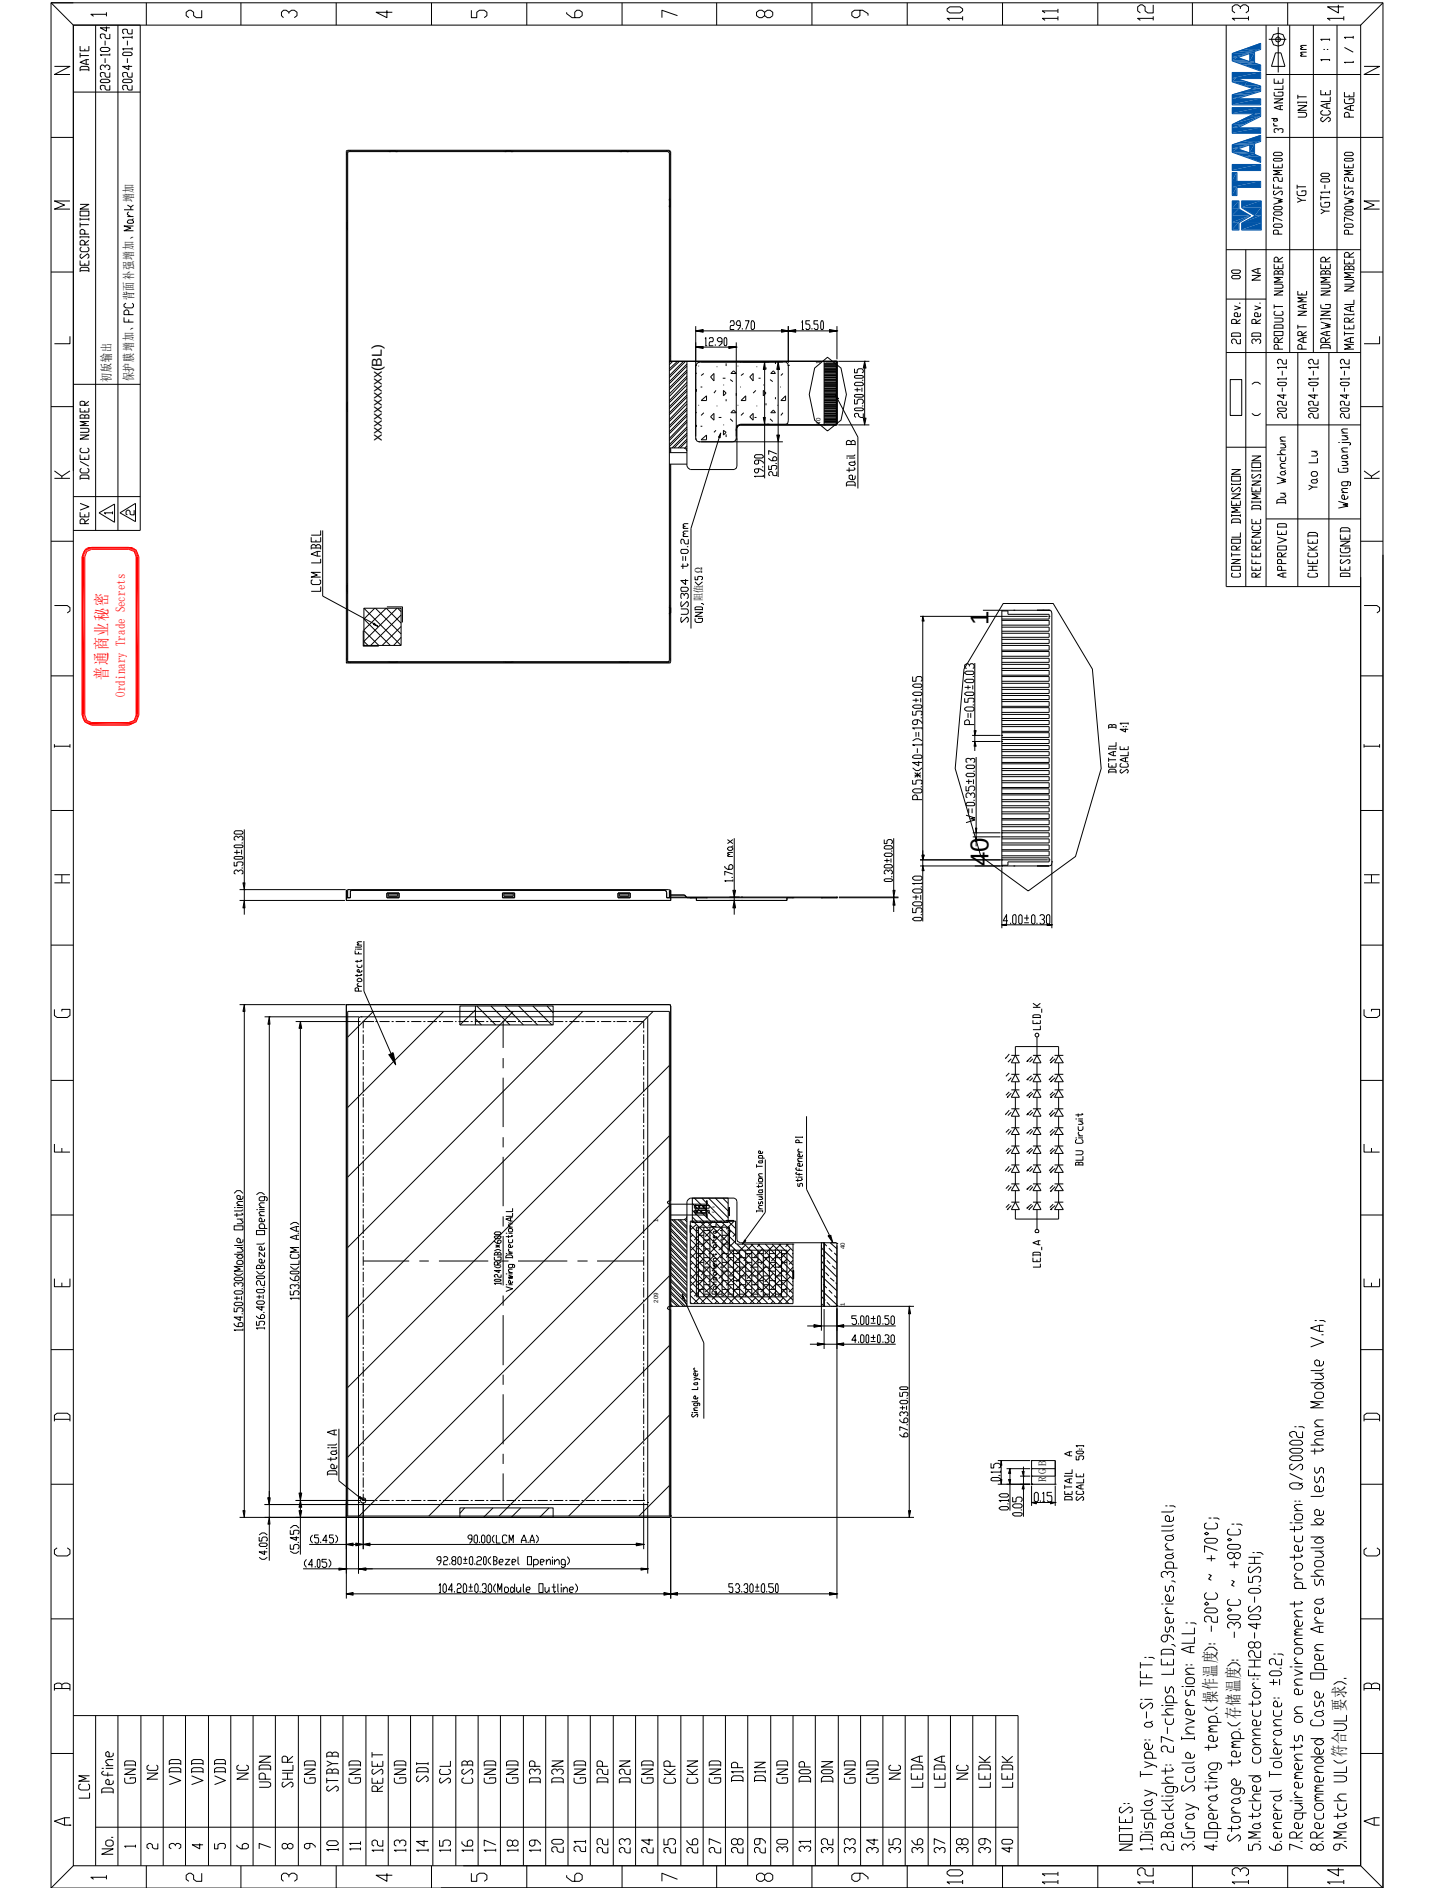

10. Packing Instruction

No	Item	Model (Material)	Dimensions(mm)	Unit Weight(Kg)	Q'ty	Remark
1	LCM	P0700WSF2ME00	140.6×80.41×5.85	TBD	52	
2	Tray	PET	356×256×20	0.125	28	
3	EPE1	EPE	336×246×6	0.01	4	
4	EPE2	EPE	375×275×10	0.014	4	
5	EPE3	EPE	250×280×12	0.015	2	
6	Carton	Corrugated Paper	398×290×315	0.75	1	
7	Package bag	PE	680×520	0.042	1	
8	Lable	Paper	100×52	0.001	1	
9	Total Weight	TBD				

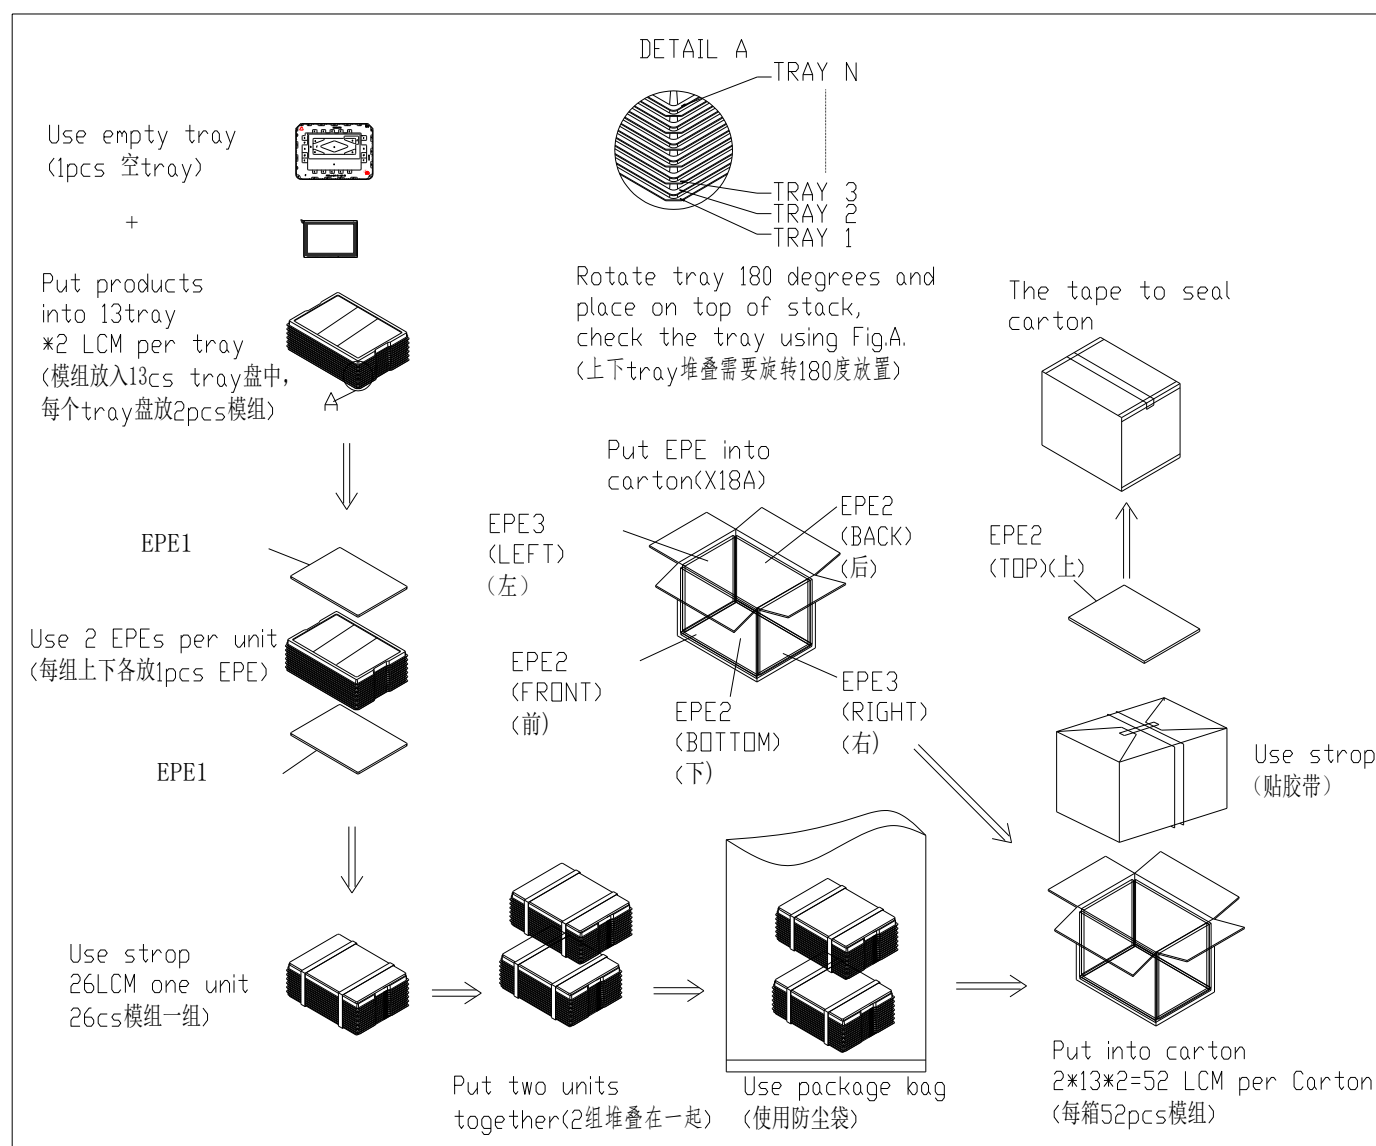

11. Module label



QR code content:

PN+LOT NO+S/N

PN: P0700WSF2ME00

LOT NO: SR22D0E01B

- 1) SR S-Version number (Value description: New stage is SR, MP starts from A~)
- 2) "2": year 2022. 3: 2023, 4: 2024
- 3) "2": February. (Value description: 1-9 ,10/A ,11/ B,12/ C)
- 4) "D": fixed value.
- 5) 0 is S-rank (Value description: SR=0, MP starts from 1~)
- 6) "E": 14th. Day: 1-9, A-Z (except for O, I, Q, U).
- 7) "01": which production line in the factory: 01-32.
- 8) "B": evening shift. A: day shift.

S/N: 070010022E004

- 1) "0700100": fixed value.
- 2) "2": 2022. Year: 3: 2023, 4: 2024.
- 3) "2": February. Month: 1-9, A, B, C means from January to December.
- 4) "E": 14th. Day: 1-9, A-Z (except for O, I, Q, U).
- 5) "004": the fourth product. Serial number, the number of products produced on the same day. 000-ZZZ(except for O, I, Q, U).

12. Precautions for Use of LCD Modules

12.1 Handling Precautions

- (1) The display panel is made of glass. Do not subject it to mechanical shock by dropping it, etc.
- (2) If the display panel is damaged and the liquid crystal fluid inside it leaks out be sure not to get any in your mouth. If the fluid comes into contact with your skin or clothes promptly wash it off using soap and water.
- (3) Do not apply excessive force to the display surface or the bezel since this may cause the color tone to vary.
- (4) The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle the polarizer carefully.
- (5) If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is still not completely clear use a moist cloth with one of the following solvents:
 - Isopropyl alcohol
 - Ethyl alcohol
 Solvents other than those mentioned above may damage the polarizer. Specifically, do not use the following:
 - Water
 - Ketone
 - Aromatic solvents
- (6) Do not disassemble the LCD Module.
- (7) If powered off, do not apply the input signals.
- (8) To prevent destruction of the module by static electricity, be careful to maintain an optimum work environment.
- (9) Be sure to ground your body when handling the LCD Modules.
- (10) Tools used for assembly, must be properly grounded.
- (11) To reduce the amount of static electricity generated, do not conduct assembly or other work under very low humidity conditions.
- (12) The LCD Module is covered with a film to protect the display surface, remove film slowly under the ionizer.

12.2 Storage precautions

- (1) When storing the LCD modules avoid exposure to direct sunlight or to the light of fluorescent lamps.
- (2) The LCD modules should be stored within the rated storage temperature range. The recommend condition is: Temperature: 0 ~ 35 °C at normal humidity.
- (3) The LCD modules should be stored in a room without acid, alkali or other harmful gas.

12.3 Transportation Precautions

The LCD modules should not be dropped or subject to violent mechanical shock during transportation. Also they should avoid excessive pressure, water, high humidity and direct sunlight.

12.4 Screen saver Precautions

Not display the fixed pattern for a long time. Use a screen saver, if the fixed pattern is displayed on the screen

12.5 Safety Precautions

- (1) When you waste damaged or unnecessary LCDs, it is recommended to crush LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned
- (2) Be sure to turn off the power supply when inserting or disconnecting the LED backlight cable.
- (3) LED driver should be designed to limit or stop its function when over current is detected on the LED.

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA.
For more information please contact:

FORTEC

GROUP

FORTEC Elektronik AG | Augsburger Straße 2b | 82110 Germering
+49 89 894450-0
info@fortecag.de | www.fortecag.de

FORTEC

INTEGRATED

FORTEC Integrated GmbH | Augsburger Straße 2b | 82110 Germering
+49 89 894363-0
info@fortec-integrated.de | www.fortec-integrated.de

FORTEC

POWER

FORTEC Power GmbH | Lise-Meitner-Straße 3 | 64560 Riedstadt
+49 6158 8285-0
weborder@fortec-power.de | www.fortec-power.de

FORTEC

EGYPT

FORTEC Electronic Design and Solution Egypt SMLC | Linx Business Park
Unit B318 | Smart Village | Giza Governorate
info@fortec-integrated.de | www.fortec-integrated.de

Autronic Steuer- und Regeltechnik GmbH | Siemensstraße 17
74343 Sachsenheim
+49 7147 24-0
vertrieb@autronic.de | www.autronic.de

FORTEC

CZECH REPUBLIC

FORTEC Czech Republic s.r.o. | Přátelství 275 | 330 02 Dýšina
+49 89 894363-0
info@fortec.cz | www.fortec.cz

FORTEC

UNITED STATES

FORTEC United States, Corp. | 87 Raynor Avenue Unit 1 | Ronkonkoma
NY | 11779 | +1 631 5804360
info@fortec.us | www.fortec.us

FORTEC

SWITZERLAND

FORTEC Switzerland AG | Bahnhofstraße 3 | 5436 Würenlos
+41 44 7446111
info@fortec.ch | www.fortec.ch

FORTEC

UNITED KINGDOM

FORTEC Technology UK Ltd. | Osprey House | 1 Osprey Court
Hinchbrooke Business Park | Huntingdon | Cambridgeshire | PE29 6FN
+44 1480 411600
info@fortec.uk | www.fortec.uk