

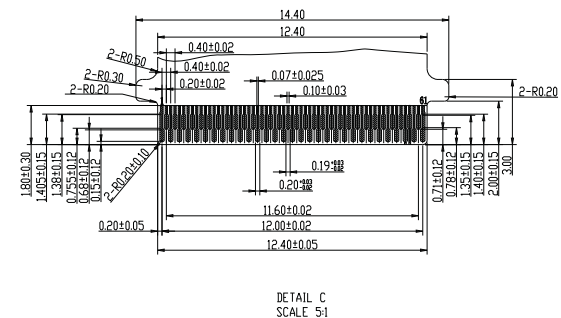

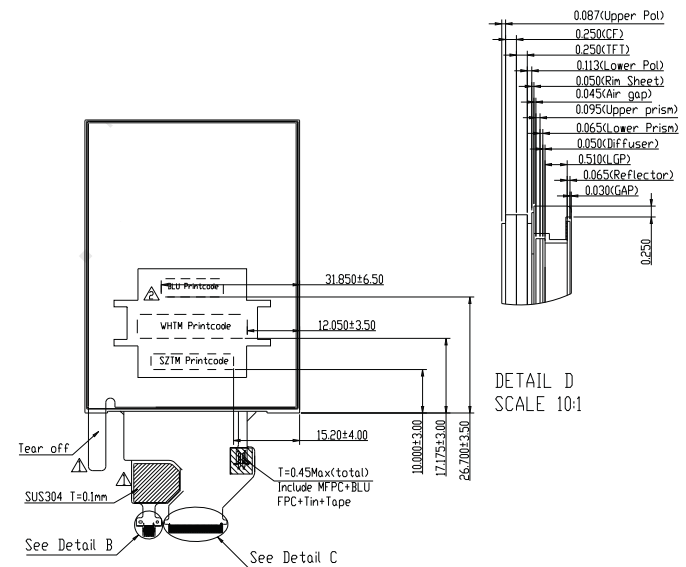


INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

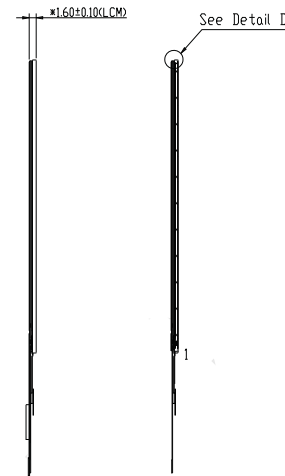

NO.	Symbol
1	TP_VDD
2	TP_INT
3	TP_SDA
4	GND
5	TP_SCL
6	TP_RESET

- 1.Display Type: a-Si TFT;
- 2.Backlight: 6-chips LED;
- 3.View Direction: All;
- 4.Driver IC: $\square$ TA5601A;TP IC: FT3327;
- 5.Matched connector: FR02C061JA1-R5000;
TP Connector: 06FZA-SM1-GAN-TB(HF);
- 6.General Tolerance: ± 0.2 ;
- 7.* Critical Dimension, CPK>=1.33;
- 8.Recommended Case Open Area should be less than Module V.A;
- 9.Requirements on environment protection: Q/S0002+HF;
10. 若有使用索尼指定原材料(再生树脂和被覆线材)必须从索尼指定原材料供应商清单中进行采购。

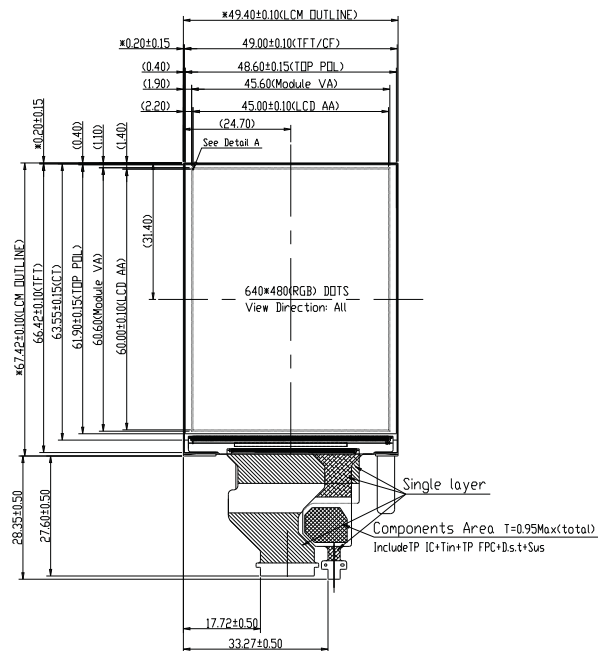

REV	DC/EC NUMBER	DESCRIPTION	DATE
△	XMGL-BGTZ-20170612001	Modify SUS Stiffener position,pin outline,modify BLU frame height and change the BLU handle position	2017-06-14
△	XMGL-BGTZ-20170801002	change the position of print code	2017-09-12

CONTROL DIMENSION			2D Rev.	02	 TIANMA	
REFERENCE DIMENSION		()	3D Rev.	NA		
APPROVED	Du Wanchun	2017-09-12	PRODUCT NUMBER		TM03QDHN01-00	3 rd ANGLE 
CHECKED	Li Xuhui	2017-09-12	PART NAME		LCM Outline	UNIT mm
			DRAWING NUMBER		YGT1-02	SCALE 1:1
DESIGNED	Liu Kai	2017-09-12	MATERIAL NUMBER		TM03QDHN01-00	PAGE 1/1