


INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

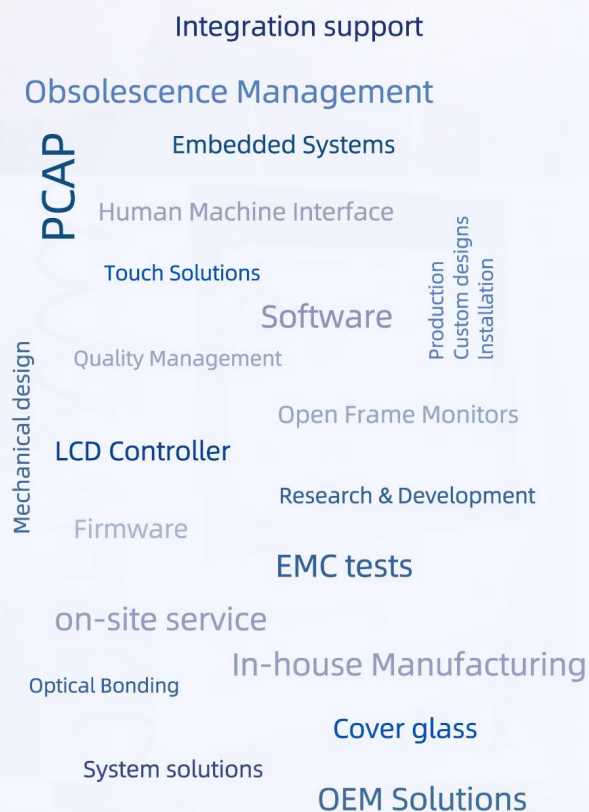

MODEL NO : TM103XDGP01**MODEL VERSION: 00****SPEC VERSION : 1.0****ISSUED DATE: 2019-09-06**

- ☒ Preliminary Specification
☐ Final Product Specification

Customer : _____

Approved by	Notes

TIANMA Confirmed :

Prepared by	Checked by	Approved by
Bei.Lei		

This technical specification is subjected to change without notice

Table of Contents

Coversheet	1
Record of Revision.....	3
1. General Specifications.....	4
2. Input/Output Terminals.....	5
3. Absolute Maximum Ratings.....	10
4. Electrical Characteristics	11
5. Timing Characteristics	15
6. Optical Characteristics	20
7. Environmental / Reliability Tests	24
8. Mechanical Drawing	25
9. Packing Drawing	26
10. Precautions For Use of LCD modules	26

Record of Revision

[illegible]

1. General Specifications

Feature		Spec
Display Spec.	Size	10.25inch
	Resolution	1920(RGB) X 720
	Technology Type	a-Si
	Pixel Configuration	R.G.B. Vertical Stripe
	Pixel pitch(mm)	0.1269 x 0.1269
	Display Mode	Normally Black
	Surface Treatment	HC
	Viewing Direction	All
	Gray Scale Inversion Direction	N/A
Mechanical Characteristics	LCM (W x H x D) (mm)	262.04x110.30x8.4
	Active Area(mm)	70.08 x 52.56
	With /Without TSP	Without TSP
	Connection Type	LCM:JUSTCONN 101049-205050 BL:JUSTCONN 101049-201050
	LED Numbers	24LEDs
	Weight (g)	TBD
Electrical Characteristics	Interface	LVDS 8-bit VESA
	Color Depth	16.7M
	Driver IC	NT51625*3+NT52602*1

Note 1: Viewing direction for best image quality is different from TFT definition, there is a 180 degree shift.

Note 2: Requirements on Environmental Protection: ROHS

Note 3: LCM weight tolerance: $\pm 5\%$

2 Input/Output Terminals

2.1 Pin assignment (TFT Interface)

Recommend connector: JUSTCONN 101049-205050

No	Symbol	I/O	Description	Remarks
1	GND	P	Ground	
2	GND	P	Ground	
3	GND	P	Ground	
4	VDD	P	Power supply for LCD. (VDD=3.3V)	
5	VDD	P	Power supply for LCD. (VDD=3.3V)	
6	VDD	P	Power supply for LCD. (VDD=3.3V)	
7	VDD	P	Power supply for LCD. (VDD=3.3V)	
8	GND	P	Ground	
9	NC(SDA)	N	Tianma internal used Custom must floating	Note1
10	NC(SCL)	N	Tianma internal used Custom must floating	
11	NC(CSB)	N	Tianma internal used Custom must floating	
12	GND	P	Ground	
13	OLV0N	I	Odd LVDS data input 0-	
14	OLV0P	I	Odd LVDS data input 0+	
15	GND	P	Ground	
16	OLV1N	I	Odd LVDS data input 1-	
17	OLV1P	I	Odd LVDS data input 1+	
18	GND	P	Ground	
19	OLV2N	I	Odd LVDS data input 2-	
20	OLV2P	I	Odd LVDS data input 1+	
21	GND	P	Ground	
22	OLVCKN	I	Odd LVDS Clock input -	
23	OLVCKP	I	Odd LVDS Clock input +	
24	GND	P	Ground	
25	OLV3N	I	Odd LVDS data input 3-	
26	OLV3P	I	Odd LVDS data input 3+	

The information contained herein is the exclusive property of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation.

27	GND	P	Ground	
28	ELV0N	I	Even LVDS data input 0-	
29	ELV0P	I	Even LVDS data input 0+	
30	GND	P	Ground	
31	ELV1N	I	Even LVDS data input 1-	
32	ELV1P	I	Even LVDS data input 1+	
33	GND	P	Ground	
34	ELV2N	I	Even LVDS data input 2-	
35	ELV2P	I	Even LVDS data input 2+	
36	GND	P	Ground	
37	ELVCKN	I	Even LVDS Clock input -	
38	ELVCKP	I	Even LVDS Clock input +	
39	GND	P	Ground	
40	ELV3N	I	Even LVDS data input 3-	
41	ELV3P	I	Even LVDS data input 3+	
42	GND	P	Ground	
43	RESET	I	Global reset pin, active low	
44	STBYB	I	Standby mode setting pin, active low	
45	SHLR	I	Horizontal shift direction(source output)selection	Note 2
46	UPDN	I	Vertical shift direction(gate output)selection	Note 2
47	Fail_T	O	Output for fail detection	Note 3
48	GND	P	Ground	
49	NC	N	No connect	
50	NC(VDD_OTP)	N	Tianma internal used Custom must floating	Note1

I/O definition:

I----Input O----Output I/O----Input/Output P----Power/Ground N—No Connect

Note 1: Custom must floating

Note 2: SHLR and UPDN controlde by customer

Note 3: Scan direction control description.



SHLR=H, UPDN=H



SHLR=L, UPDN=H



SHLR=H, UPDN=L



SHLR=L, UPDN=H

TIANMA

Note 4: Fail_T: normally pull L in IC, active “H”(when Hsync or Vsync or Clk miss, this pin will pull “H”)

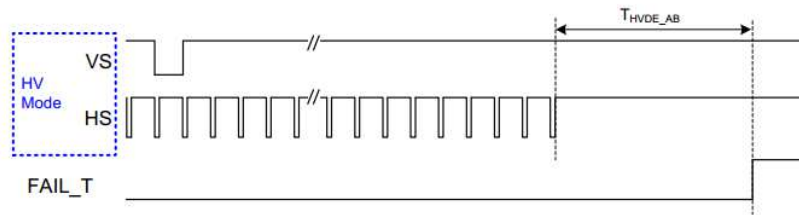


Figure 5. HV Mode AB_IND operation

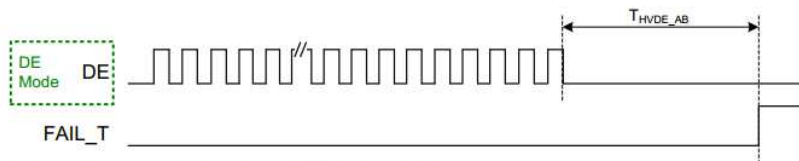


Figure 6. DE Mode AB_IND Operation

Note: For 1920RGBx720 resolution, $T_{HVDS_AB} \approx 10.7\text{ms}$ for DE and HS detection, $\sim 60\text{ms}$ for VS detection.

The Clock Error Detection function monitors the Clock signal, if the clock pulse stopped longer than the criterion, AB_IND will output High for error indication.

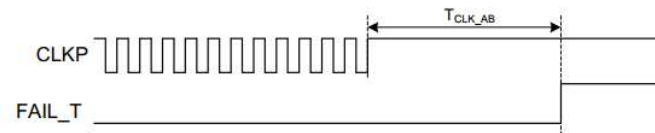


Figure 7. Clock Error AB_IND Operation

Note: For 1920RGBx720 resolution, $T_{CLK_AB} \approx 234\mu\text{s}$

When CLK lost, T_{sp_det} is about 234us.

When DE/HS lost, T_{sp_det} is about 10.7ms.

When HV lost, T_{sp_det} is about 60ms.

Don't connect this pin to an output pin in customer system, it may be connected to input pin or NC.

Please keep no any pull up or pull low resistor connect to this pin on your system when this pin is used for fail detection.

2.2 Pin assignment (backlight Interface)

Recommend connector: JUSTCONN 101049-201050

No	Symbol	I/O	Description	Remarks
1	A1	P	LED Anode	
2	A2	P	LED Anode	
3	A3	P	LED Anode	
4	NC	N	Keep this pin open	
5	THER+	O	Thermistor +	
6	THER-	O	Thermistor -	
7	NC	N	Keep this pin open	
8	C3	P	LED Cathode	
9	C2	P	LED Cathode	
10	C1	P	LED Cathode	

I/O definition:

I----Input O----Output I/O----Input/Output P----Power/Ground

3 Absolute Maximum Ratings

GND=0V

Item	Symbol	Min	Max	Unit	Remark
Logic Supply Voltage	VDD	-0.5	5	V	
Operating Temperature	T _{OPR}	-30	85	°C	
Storage Temperature	T _{STG}	-40	90	°C	
Relative Humidity (Note1)	RH	--	≤95	%	Ta≤40°C
		--	≤85	%	40°C<Ta≤50°C
		--	≤55	%	50°C<Ta≤60°C
		--	≤36	%	60°C<Ta≤70°C
		--	≤24	%	70°C<Ta≤80°C
Absolute Humidity	AH	--	≤70	g/m ³	Ta>70°C

Note 1: Ta means the ambient temperature.

It is necessary to limit the relative humidity to the specified temperature range.
Condensation on the module is not allowed.


4 Electrical Characteristics

4.1 Driving TFT LCD Panel

GND=0V, Ta=25℃

Item	Symbol	Min	Typ	Max	Unit	Remark
Logic Supply Voltage	VDD	3.0	3.3	3.6	V	
Permissible Inrush current of VDD	Ivdd	--		TBD	MA	Note 1
Input High Voltage	V _{IH}	0.7*VDD	--	VDD	V	Note 2
Input Low Voltage	V _{IL}	GND	--	0.3*VDD	V	
Power Consumption	White mode (60Hz)		TBD		MW	Note 3

Note 1:




Note 2: Contain RESET, STBYB, SHLR, UPDN.

Note 3: VDD=3.3V.


LVDS Interface DC characteristic

Parameter	Symbol	Condition	Spec			Unit
			Min	Typ	Max	
Differential input high threshold voltage	R _{WTH}		-	-	+0.2	V
Differential input low threshold voltage	R _{WTL}		-0.2-	-	-	V
Differential input common mode voltage	R _{XVCM}	-	1	1.2	1.7- V _{id} /2	V
Differential input voltage	V _{id}	-	0.2	-	0.6	V
Differential input leakage current	I _{lvleak}		-10	-	10	uA
LVDS terminal match resistor	R _{LVDS}			100		Ω

Single-end Signal:

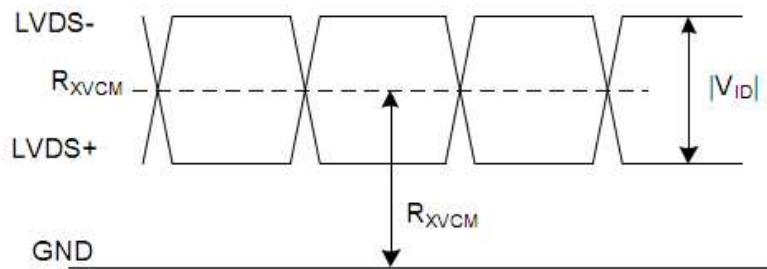

Differential Signal

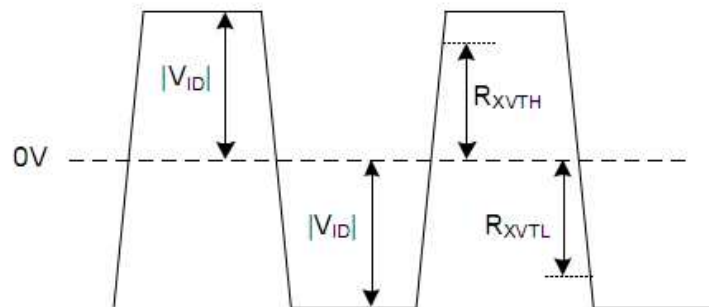


4.2 Driving Backlight

$T_a=25^{\circ}\text{C}$

Item	Symbol	Min	Typ	Max	Unit	Remark
Forward Current	I_{BL}	--	90	--	mA	
Forward Voltage	V_{BL}	21.6	24.24	26.6	V	
Power Consumption	W_{BL}	--	TBD	--	mW	
Operating Life Time	--	--	20000	--	Hrs	

Note 1: The figure below shows the connection of backlight LED. Each LED : $I=90\text{ mA}$, $V=3.03\text{V}$.

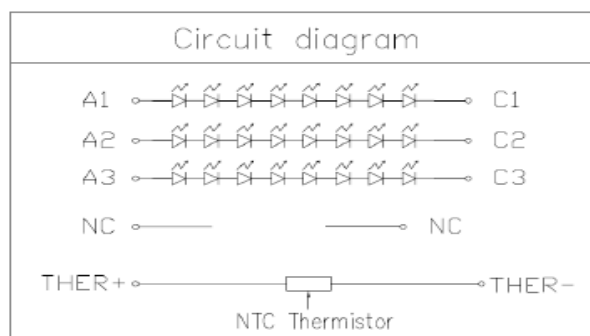

Note 2: IF is defined for one channel LED. Optical performance should be evaluated at $T_a=25^{\circ}\text{C}$ only. If LED is driven by high current, high ambient temperature & humidity condition, the life time of

LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.


Note 3: It is suggested customer to make sure the LCM module is well heat dissipation. It is preliminary suggested to start de-rating from 65°C of the NTC sensor.

Note 4: The NTC thermistor Part No. is NCP15XH103F0SRC. NTC thermistor is included in LED circuit. Pls refer to appendix for NTC temperature behavior.


Note 5: LED current's de-rating in backlight, please refer to the following chart. (Just for reference, Tianma will arrange test at sample phase).

Item	Value	Remarks
Type	NCP15XH103F0SRC	Murata
Resistance Tolerance	10k Ω $\pm$ 1%	Ta=25°C
Temperature Characteristic	Nominal B-Constant 3350-3399K	Ta=25 to +85°C
Permissive Operating Current	0.31mA	Ta=25°C
Absolute Maximum Power Consumption	100mW	Ta=25°C

Note 6: The de-rating curve for the backlight is shown below. The de-rating temperature is >75°C

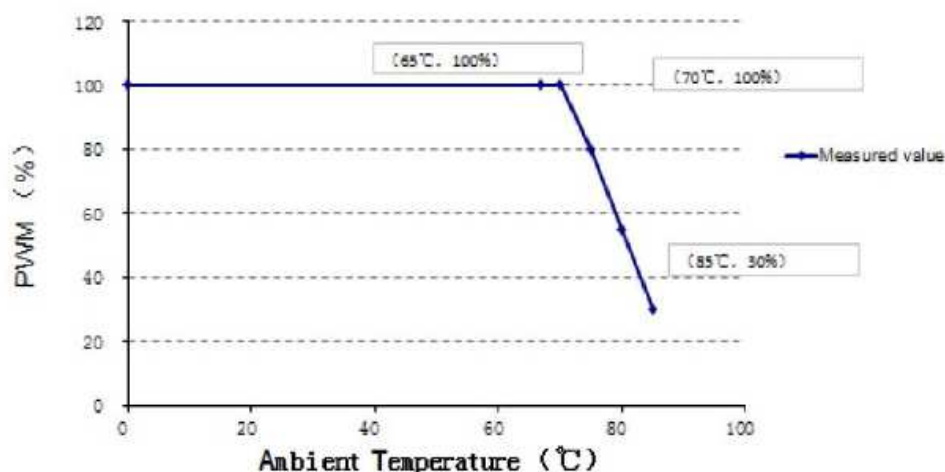

4.3 Clock Diagram

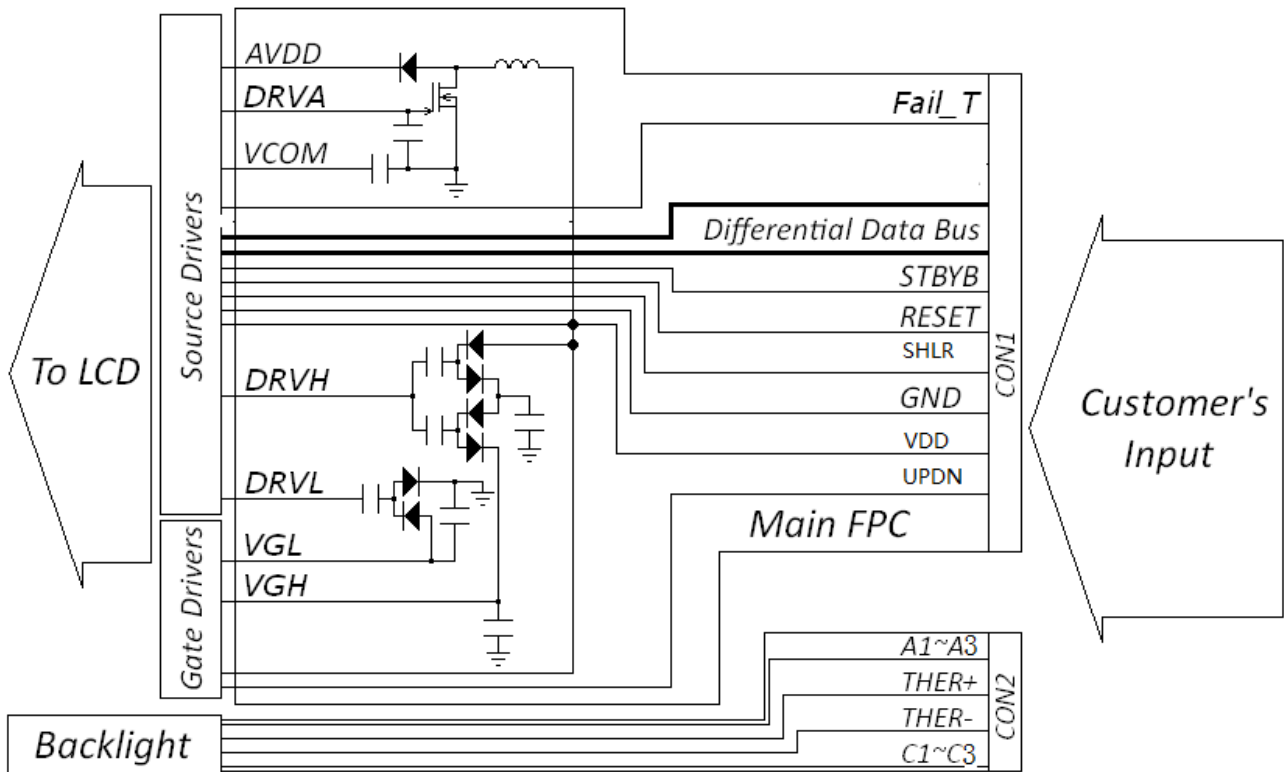

5 Timing Characteristics


5.1 Input timing

Parameter	Symbol	Unit	Min.	Typ.	Max.	REMARKS
Clock Frequency	f_{dck}	MHz	44.6	44.7	50.2	
H Total Time	T_{hp}	clocks	1020	1024	1150	
H Active Time	HA	clocks	960			
V Total Time	T_{vp}	lines	726	728	849	
V Active Time	VA	lines	720			
V Frequency	f_v	Hz	-	60Hz	-	

Note: Above of all these information is just for reference, the final information should be based on the test result of module and be set for module in initial code.
Timing will update later

5.1.1 Input timing chart

LVDS input timing format

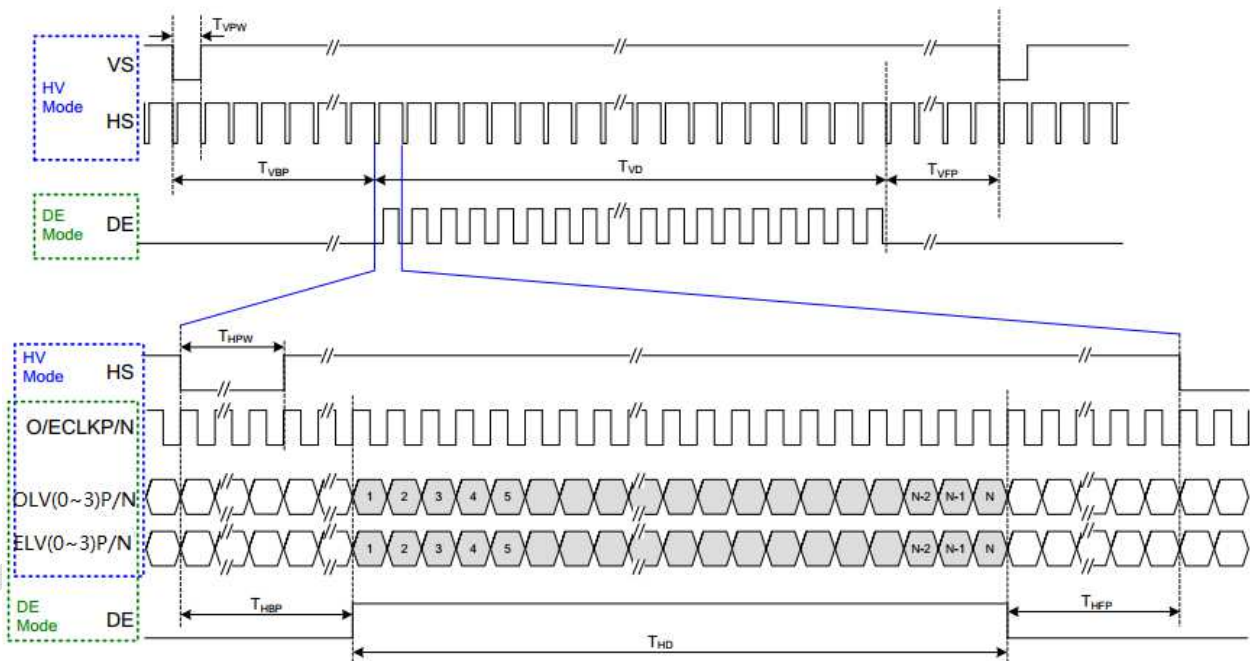

5.2 LVDS Timing

Parameter	Symb ol	Min	Typ	Max	Unit	Condition
Clock frequency	FLVCLK	25	-	85	MHz	Refer to input timing table
Clock Period	TLVCLK	40	-	11.76	nsec	
Clock high time	TLVCH	-	$4/(7 \times \text{RXFCLK})$	-	ns	
Clock low time	TLVCL	-	$3/(7 \times \text{RXFCLK})$	-	ns	
Input data skew margin	TRSKM	-	-	0.25	UI	VCC_IF=1.8V w/o SSC
Strobe width	TSW	0.5	-	-	UI	
1 data bit time	UI	-	1/7	-	TLVCLK	
Position 1	TPOS1	-0.25	0	0.25	UI	
Position 0	TPOS0	0.75	1	1.25	UI	
Position 6	TPOS6	1.75	2	2.25	UI	
Position 5	TPOS5	2.75	3	3.25	UI	
Position 4	TPOS4	3.75	4	4.25	UI	
Position 3	TPOS3	4.75	5	5.25	UI	
Position 2	TPOS2	5.75	6	6.25	UI	
PLL wake-up time	TenPLL	-	-	150	us	
Modulation Frequency	SSCMF	23	-	93	KHz	
Modulation Rate	SSCMR	-3	-	3	%	LVDS clock = 81MHz, center spread

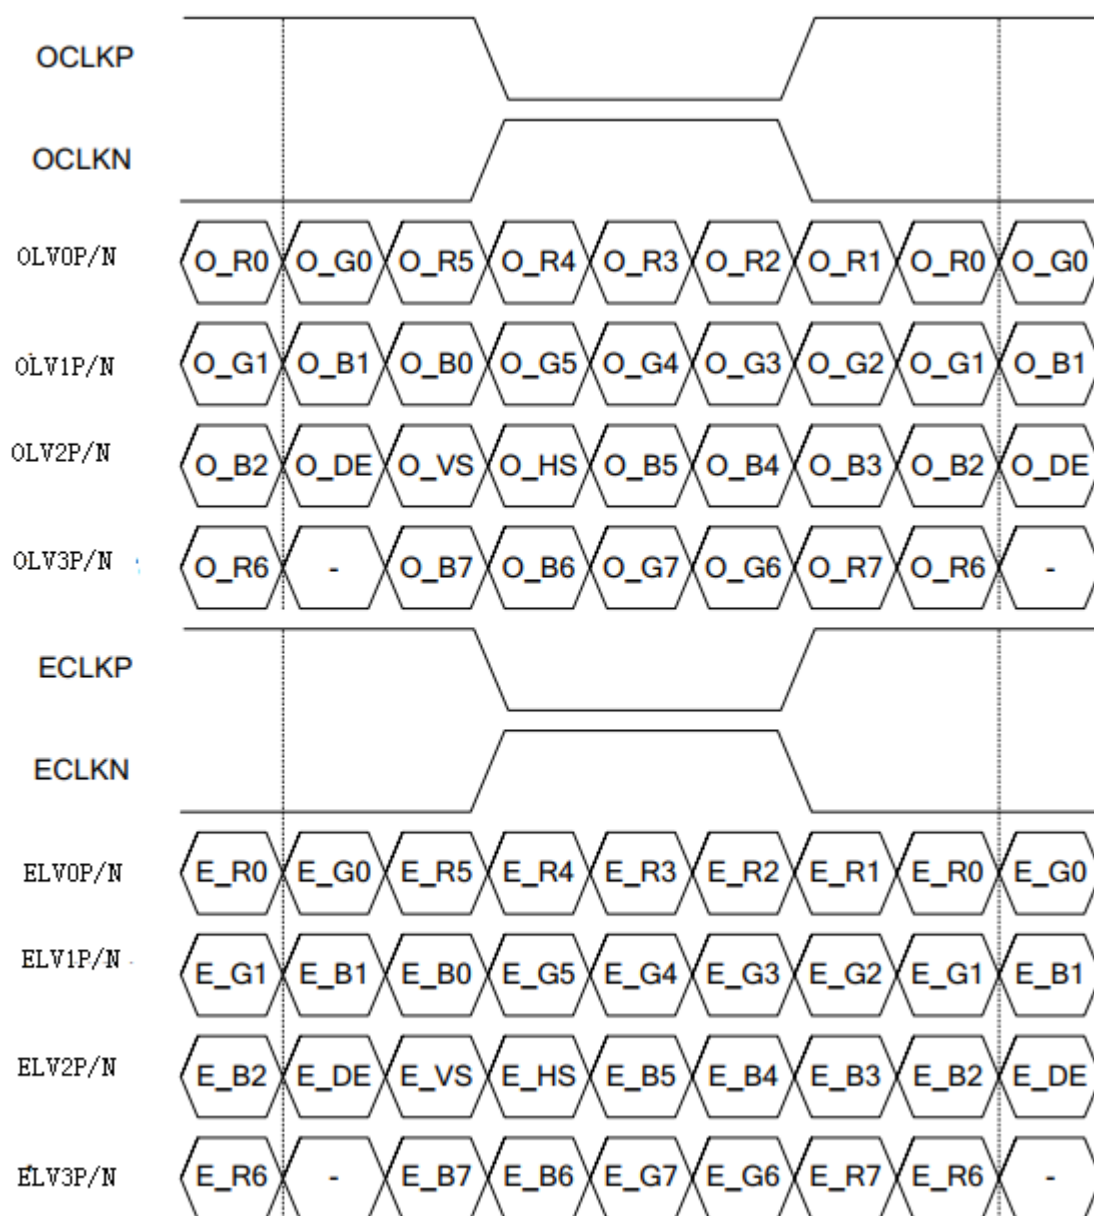


Figure5.2.1 8-bit LVDS Dual Link VESA

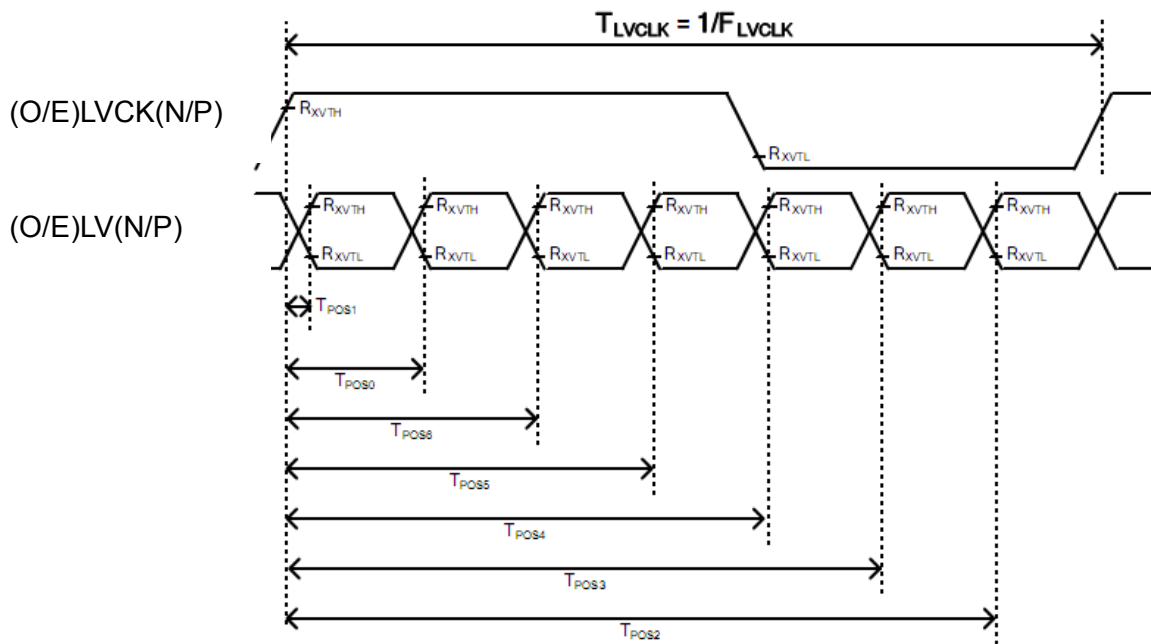


Figure5.2.2 LVDS input timing

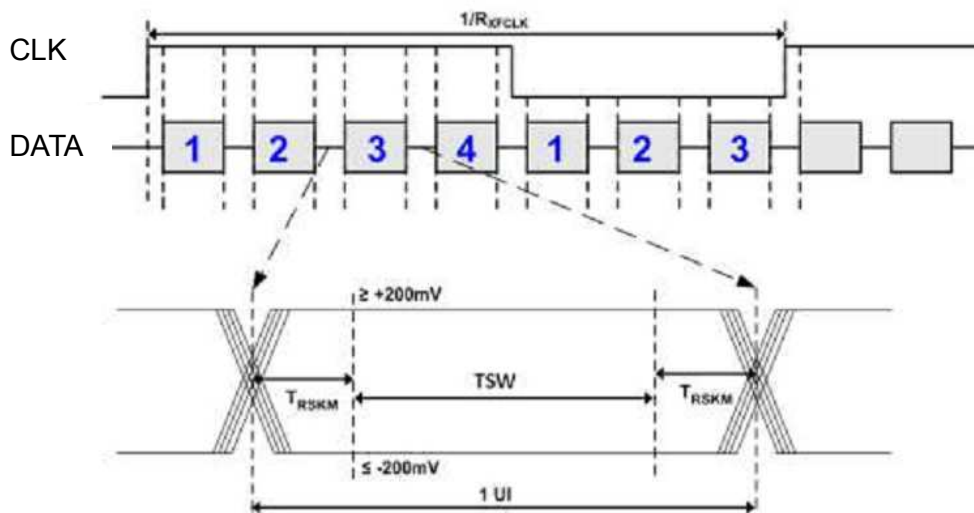


Figure5.2.3 LVDS Data Skew


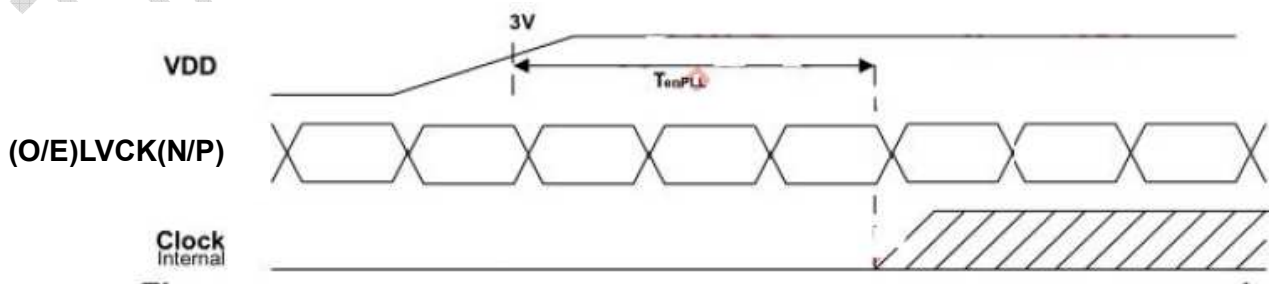


Figure5.2.4 Relationship between VDD, LVDS clock, and internal clock


The information contained herein is the exclusive property of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of SHANGHAI TIANMA MICRO-ELECTRONICS Corporation.

5.3 Power on/off sequence

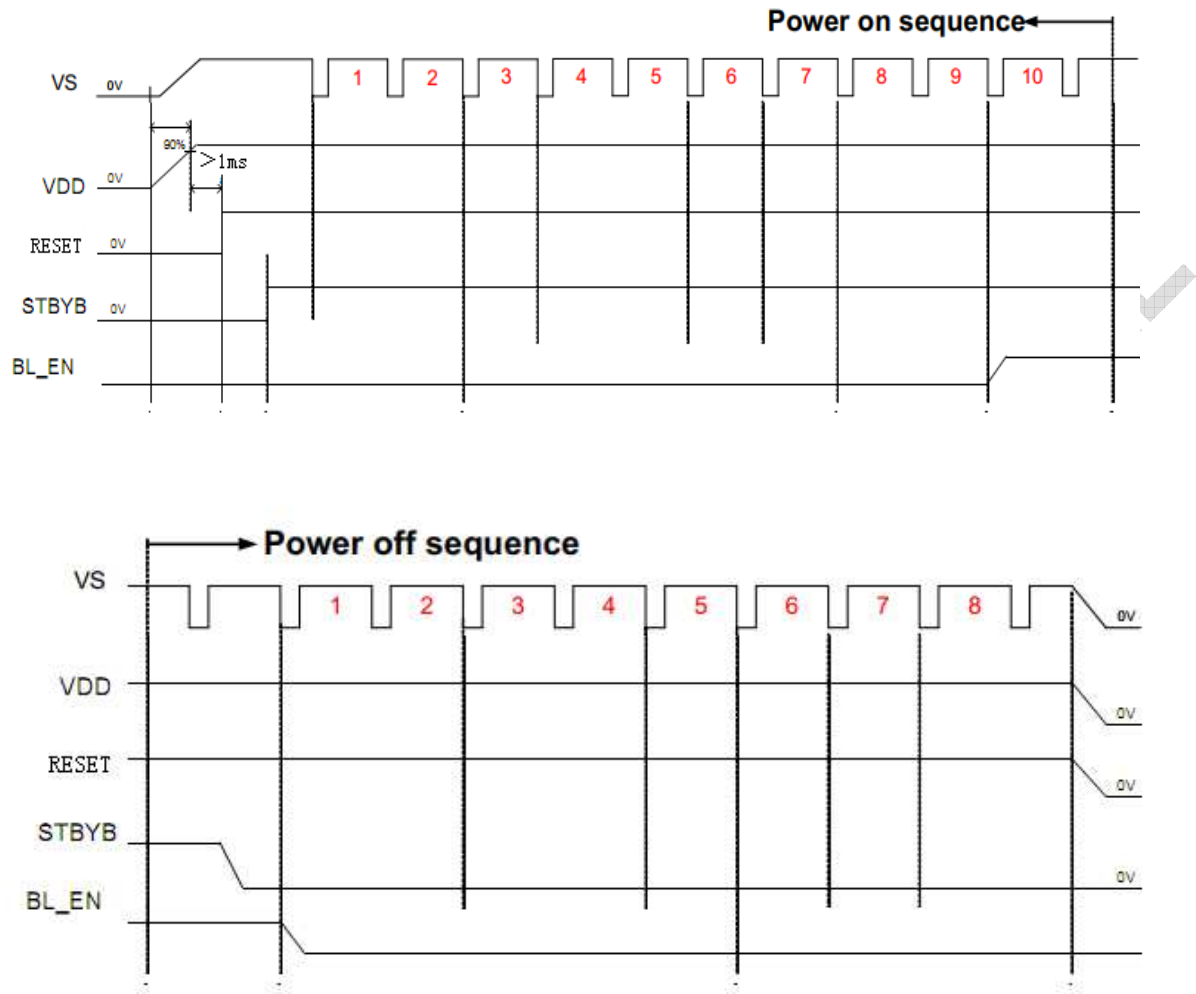

5.4 VDD/RESET Timing

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
VDD power source slew time	T_{POR}	-	-	20	ms	From 0V to 90% VDD
RESET active pulse width	T_{GRB}	1	-	-	ms	VDDIO = 3.3V

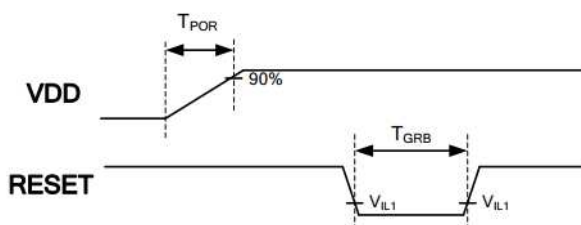

6 Optical Characteristics

6.1 Optical Specification

Ta=25°C


Item		Symbol	Condition	Min	Typ.	Max.	Unit	Remark
View Angles		θT	CR≥ 10	80	88	--	Degree	Note 2
		θB		80	88	--		
		θL		80	88	--		
		θR		80	88	--		
Contrast Ratio		CR	θ=0°	700	1000	--		Note1 Note3
Response Time		T _{ON}	25°C	--	20	30	ms	Note1 Note4
		T _{OFF}						
Chromaticity	White	x	Backlight is on		TBD			Note5, Note1
		y			TBD			
	Red	x			TBD			
		y			TBD			
	Green	x			TBD			
		y			TBD			
	Blue	x			TBD			
		y			TBD			
Uniformity		U		75	80	--	%	Note1 Note6
NTSC				65	75	--	%	Note 5
Luminance		L		600	800	--	cd/m ²	Note1 Note7

Test Conditions:

1. $V_F = 3.03V$, $I_F = 90mA$ (LED current), the ambient temperature is 25°C.
2. The test systems refer to Note 1 and Note2.

Note 1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

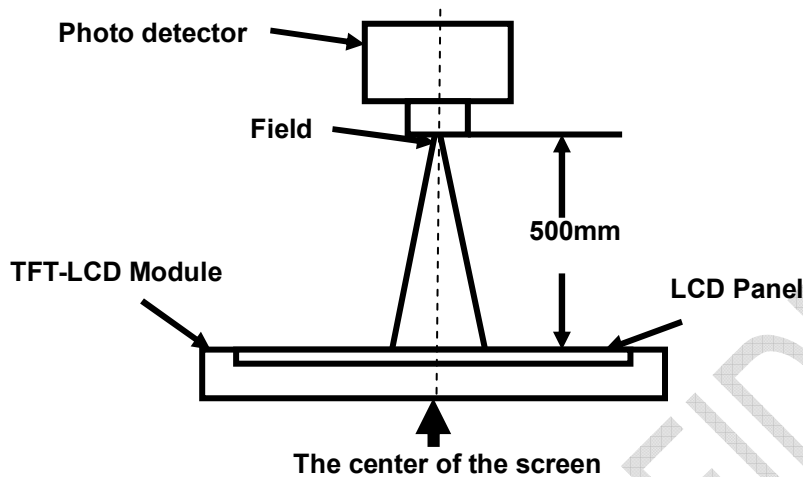

Note 2: Definition of viewing angle range and measurement system.

viewing angle is measured at the center point of the LCD by EZ-Contrast.

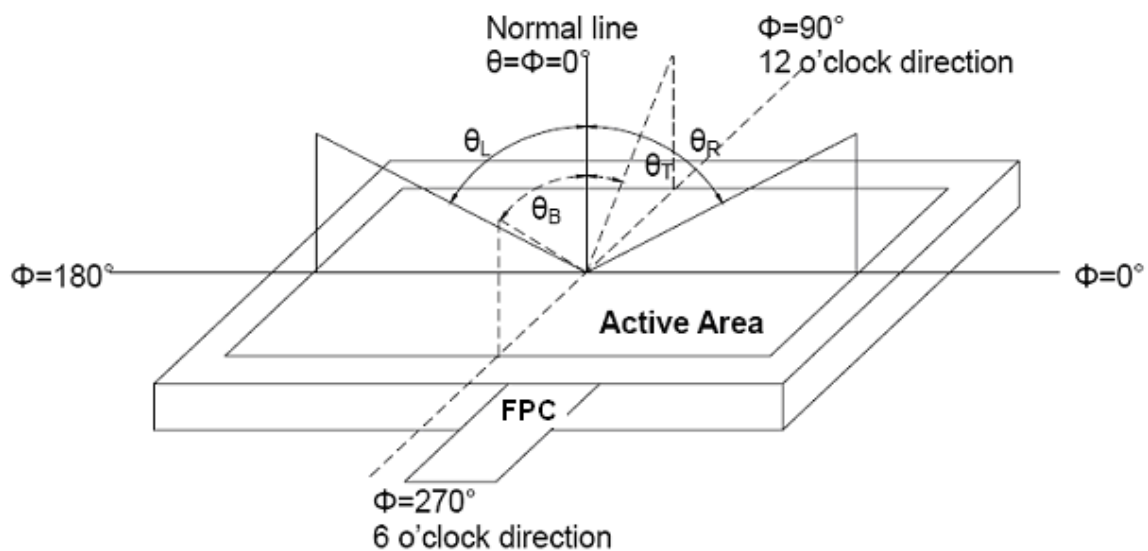


Fig. 1 Definition of viewing angle

Note 3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$


"White state ":The state is that the LCD should driven by Vwhite.

"Black state": The state is that the LCD should driven by Vblack.

Vwhite: To be determined Vblack: To be determined.

Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (TON) is the time between photo detector output intensity changed from 90% to 10%. And fall time (TOFF) is the time between photo detector output intensity changed from 10% to 90%.

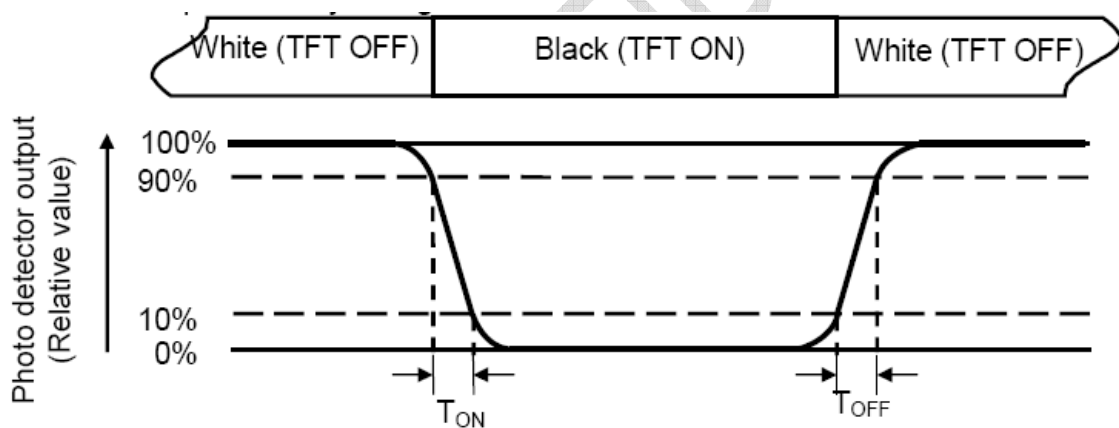

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity}(U) = L_{\min} / L_{\max}$$

L-----Active area length W----- Active area width

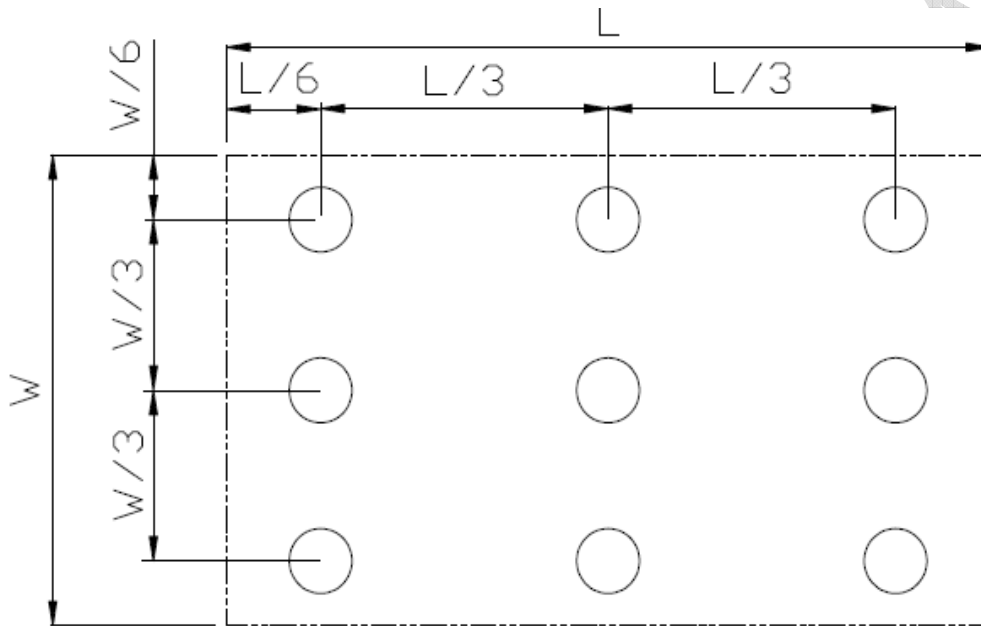


Fig. 2 Definition of uniformity

$L_{\max}$: The measured maximum luminance of all measurement position.

$L_{\min}$: The measured minimum luminance of all measurement position.

Note 7: Definition of Luminance :

Measure the luminance of white state at center point.

7 Environmental / Reliability Tests

No	Test Item	Condition	Remarks
1	High Temperature Operation	Ta=+85℃, 240hrs	IEC60068-2-1:2007 GB2423.2-2008
2	Low Temperature Operation	Ta=-30℃, 240hrs	IEC60068-2-1:2007 GB2423.1-2008
3	High Temperature Storage	Ta=+90℃, 240hrs	IEC60068-2-1:2007 GB2423.2-2008
4	Low Temperature Storage	Ta=-40℃, 240hrs	IEC60068-2-1:2007 GB2423.1-2008
5	Temperature & Humidity Operation	Ta=60℃, 90% RH 240 hours	IEC60068-2-78 :2001 GB/T2423.3-2006
6	Thermal Shock (Non-operation)	-40℃ 30 min~+85℃ 30 min, Change time:5min, 100 Cycles	Start with cold temperature, End with high temperature, IEC60068-2-14:1984,GB2423.22-2012
7	Electro Static Discharge (Operation)	C=150pF, R=330Ω·5points/panel Air:±15KV, 5times; Contact:±8KV, 5 times; (Environment: 15℃~35℃, 30%~60%, 86Kpa~106Kpa)	IEC61000-4-2:2001 GB/T17626.2-2006
8	Vibration (Non-operation)	Frequency range : 10~55Hz Stroke : 1.5mm Sweep : 10Hz~55Hz~10Hz 2h for x,y,z (total 6h)	IEC60068-2-6:1982 GB/T2423.10-2008
9	Shock (Non-operation)	Half Sine Wave 60G ,6ms,±X,±Y,±Z 3times for each direction	IEC60068-2-27:1987 GB/T2423.5-1995
10	Package Drop Test	Height: TBD cm, 1 corner, 3 edges, 6 surfaces	GB/T 4857.5-1992

Note 1: Ta is the ambient temperature of sample.

Note 2: Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.

Note 3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but don't guarantee all of the cosmetic specification.


8 Mechanical Drawing



9 Packing drawing

No	Item	Model (Material)	Dimensions(mm)	Unit Weight(Kg)	Quantity	Remark
1	LCM module	TM103XDGP01-00	262.04x110.30x8.4	0.447	17	
2	PP BOX(BOTTOM)	PP BOX盒底	533*368*165	0.415	1	
3	PP BOX(UP)	PP BOX盒盖	529*364*35	0.172	1	
4	Carton	Corrugated Paper	550*385*202	1	1	
5	Anti-static bag	防静电袋	305*170	~	17	
6	Tape	美纹胶带	30*10	~	17	
7	Desiccant	干燥剂	45*48	0.003	16	
8	Label	标签	80*60	~	1	
9	Velcro	魔术贴	1300*25		2	
	Total weight	9.234 ± 5%Kg				

纸箱堆叠数：每层 5 箱*共 5 层；栈板尺寸：1200*1000mm

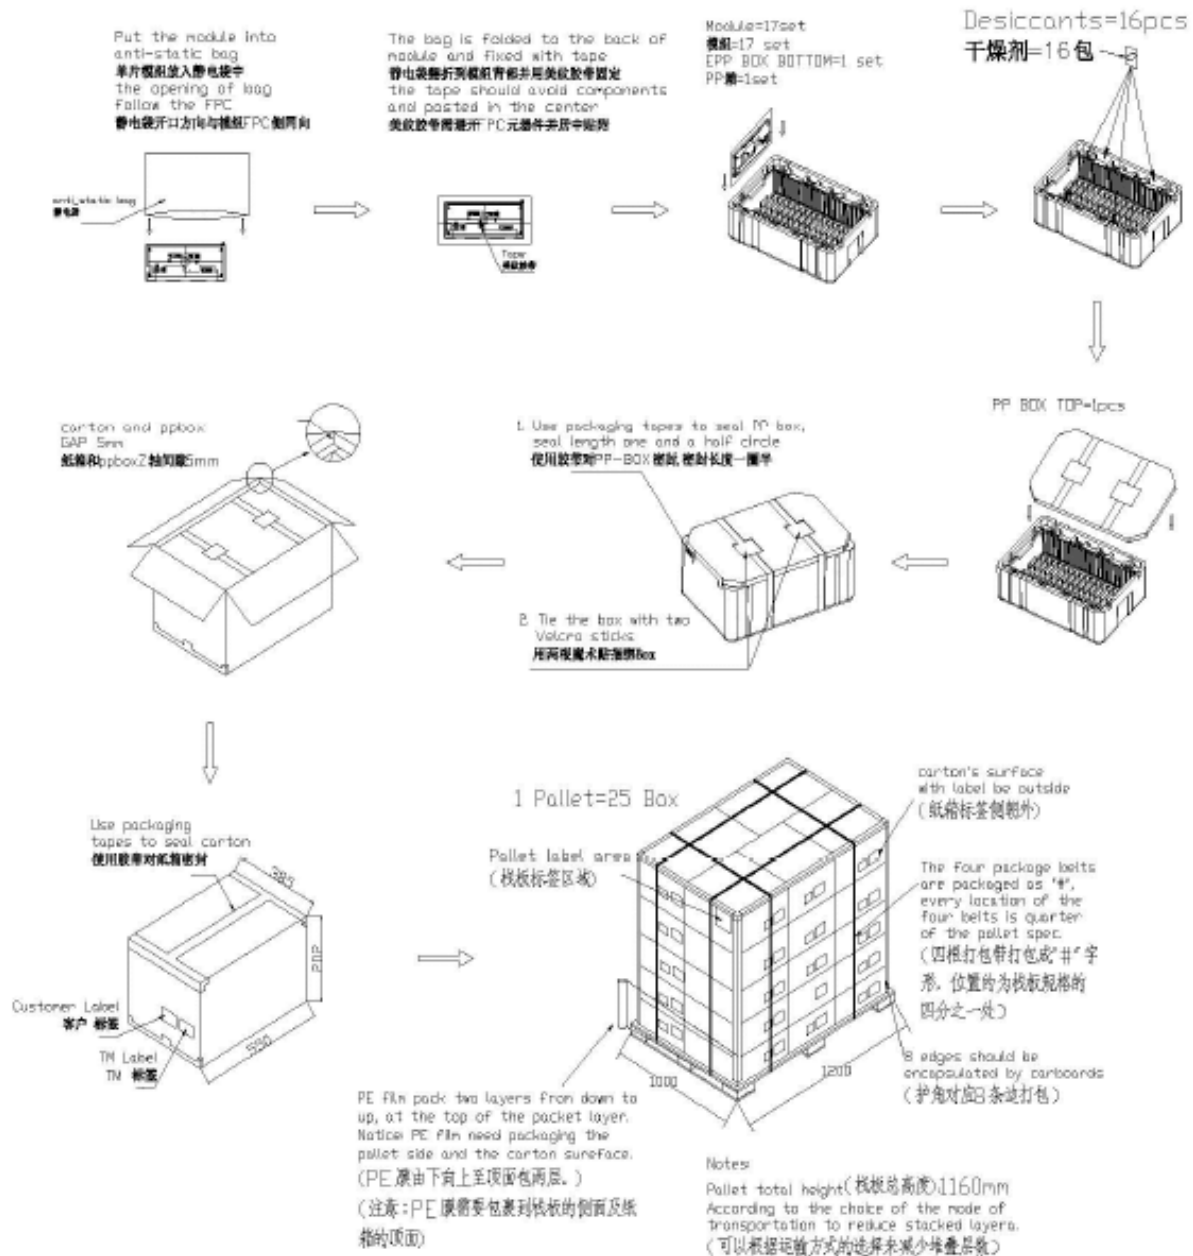

10 Precautions For Use of LCD modules**10.1 Handling Precautions**

- 10.1.1. The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.
- 10.1.2. If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.
- 10.1.3. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.
- 10.1.4. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- 10.1.5. If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:
 - Isopropyl alcohol
 - Ethyl alcoholSolvents other than those mentioned above may damage the polarizer. Especially, do not use the following:
 - Water
 - Ketone
 - Aromatic solvents
- 10.1.6. Do not attempt to disassemble the LCD Module.
- 10.1.7. If the logic circuit power is off, do not apply the input signals.
- 10.1.8. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - 10.1.8.1. Be sure to ground the body when handling the LCD Modules.
 - 10.1.8.2. Tools required for assembly, such as soldering irons, must be properly ground.
 - 10.1.8.3. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
 - 10.1.8.4. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

10.2 Storage Precautions

- 10.2.1. When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.
- 10.2.2. The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:
Temperature : 0℃ ~ 40℃ Relatively humidity: ≤80%
- 10.2.3. The LCD modules should be stored in the room without acid, alkali and harmful gas.

10.3 Transportation Precautions

The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.