

INDUSTRIAL STRENGTH... Start Your Application From **YOURITECH**

Integration support

Obsolescence Management

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Cover glass

System solutions

OEM Solutions

Custom Display

PCAP

Mechanical design

Production Custom designs Installation





SeeYA 1.03" Micro-OLED (2560×2560RGB)

Specification

Model Name: SY103WAM01

Email: amanda@shtdo.com

Website: www.shtdo.com

Attachment is the exclusive property of SeeYA and shall not be reproduced or copied or transformed to any other format without prior permission of SeeYA. Please handle the information based on Non-Disclosure Agreement.



Revision

Version	Date	Description
V1.0	2021.4.15	Initial release



Contents

1	General Description	4
2	General Feature	5
3	Optical Specification	6
4	Pixel Arrangement	8
5	System block	9
6	Module Diagram	10
7	Pin Description	11
7.1	Pin Description	11
7.2	Application circuit	14
8	Electrical Characteristics	16
8.1	Absolute Maximum Ratings	16
8.2	DC Characteristic	16
8.3	DSI DC/AC Characteristic	17
8.4	Timing Characteristics	19
8.5	Reset Timing Characteristics	23
9	Power Sequence	24
9.1	Power Generation Scheme	24
9.2	Power Sequence	24
10	Interface	26
10.1	I2C Interface	26
10.1.1	I2C-Bus Protocol	27
10.1.2	Write Sequence	27
10.1.3	Read Sequence	28
10.2	MIPI Interface	28
10.2.1	DSI System Configuration	29
11	User Command	30
	Command list	30
	SWRESET(0100h): Software Reset	31
	CMODE(0300h): Compression Mode	32
	SLPIN (1000h): Sleep In	33
	SLPOUT (1100h): Sleep Out	34
	ALLPOFF (2200h): All Pixels OFF	35
	ALLPON (2300h): All Pixel ON	36
	TCQN (2500h): Temperature Sensor Enable	37
	DISPON (2900h): Display ON	39
	CASET (2A00h): Column Address Set	40
	RASET (2B00h): Row Address Set	41
	MADCTL (3600h): Set Address Mode	42
	IDMOFF (3800h): Idle Mode Off	44
	IDMON (3900h): Idle Mode On	45
	WRDISBV (5100h): Write Display Brightness	46
	SCACTRL (6900h): Scaling Up Control	47
	IFCONF (6B00h): Interface Configure	48
	RESCTRL1 (8000h): Resolution Control1	49
12	Reliability	50
13	Handling Precautions	51
13.1	Mounting Method	51
13.2	Caution of Against Static Charge	51
13.3	Packing	51
13.4	Caution for Operation	51
13.5	Storage	51
13.6	Safety Precautions	52
13.7	Precautions before use	52
14	Warranty	53
15	Packing	54



1 General Description

This display is a 1.03 inch diagonal, 2560(RGB) × 2560 dots active matrix color OLED panel module based on single-crystal silicon transistors. This panel integrates panel driver and logic driver, and realizes small size, light weight, low power consumption and high resolution.

Applications: View finders, Head mounted displays, etc.

- 2560 x 2560 Real RGB Resolution
- AP Operated Resolution
 - 2560 x 2560: (8 x M, M=160~320) x RGB x (8 x N, N=90~320)
- Frame rate:
 - 1920 x1920 input, x1.33scaling up to 2560 x2560, VESA DSC on, maximum 90Hz
 - 2560 x2560, input, x1scaling up , VESA DSC on, maximum 75Hz
- Normal operation supports full color mode: 16.7M colors
- Interface
 - MIPI + I2C
 - MIPI DPHY v1.2 with one / two port (4 / 8 lanes), 1.0Gbps/Lane
 - MIPI DSI v1.01 R11 Video mode
 - Support VESA-DSC v1.1 in-chip decoder (3X compression ratio)
 - Support scaling up 1.33x (1920x1920 to 2560 x 2560) and 2x (1280x1280 to 2560 x 2560)
- Scan direction selection, up or down and right or left
- Orbit supported
- Wide range Brightness adjustment
- Sequential/Global emission
- Temperature compensation



2 General Feature

Parameter	Specification
Resolution	2560(H) x 2560 (V)
Number of dots	19.66M (2560x2560x3)
Pixel Size	7.2μm x 7.2μm
Pixel Arrangement	RGB π type
Useable Display Area	18.432mm x 18.432mm / 1.03" diagonal
Luminance	1800cd/m ² typical
Contrast Ratio	500,000:1 typical
Uniformity	> 85%
Operating Voltage	VDDI=1.8V AVDD=5.8V~6V AVEE=-4V~-5.5V
Power Consumption (1800nits, 100%duty_1920 × 1920input_1.33scaling up_No DSC_72Hz)	1600mW
Gray Levels	256
Interface	MIPI (1 or 2-port D-PHY)
Frame Rate	60HZ~90HZ
Weight	2g
Operating Temperature	-20°C to +70°C
Storage Temperature	-40°C to +80°C

3 Optical Specification

Item	Description	Min.	Typ.	Max.	Unit
Brightness	Tpanel=30°C		1800		cd/m2
Brightness	Tpanel=10°C ~70°C	1350	1800	2250	cd/m2
CR	white to Black Contrast Ratio	200,000:1	500,000:1		
Uniformity	End to end large-area uniformity	85			%
CIE Red	CIE-x	0.635	0.655	0.675	
	CIE-y	0.315	0.335	0.355	
CIE Green	CIE-x	0.197	0.232	0.267	
	CIE-y	0.675	0.695	0.715	
CIE Blue	CIE-x	0.141	0.161	0.181	
	CIE-y	0.045	0.065	0.085	
CIE White	CIE-x	0.298	0.313	0.328	
	CIE-y	0.314	0.329	0.344	
Color Gamut	DCI-P3	80%	90%		
View angle (White)	Luminance decay to 50%	35°			
Frame rate		60		90	HZ
Power consumption	1800nits, 100%duty_1920× 1920input_1.33sca ling up_No DSC_72Hz		1600	2000	mW

Note1: If there is no specified, the specification of optical is specified at 30 degree Celsius.

Note2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. Brightness is measured as peak luminance at full white pattern (Gray level=255);

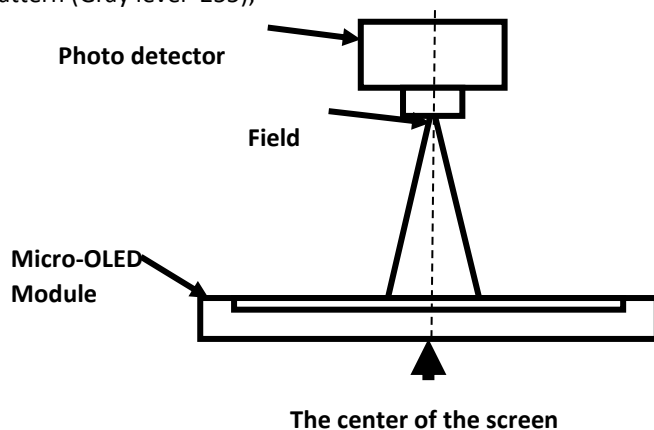


Fig.1


Email: amanda@shtdo.com

Website: www.shtdo.com

Attachment is the exclusive property of SeeYA and shall not be reproduced or copied or transformed to any other format without prior permission of SeeYA. Please handle the information based on Non-Disclosure Agreement.



6 Module Diagram

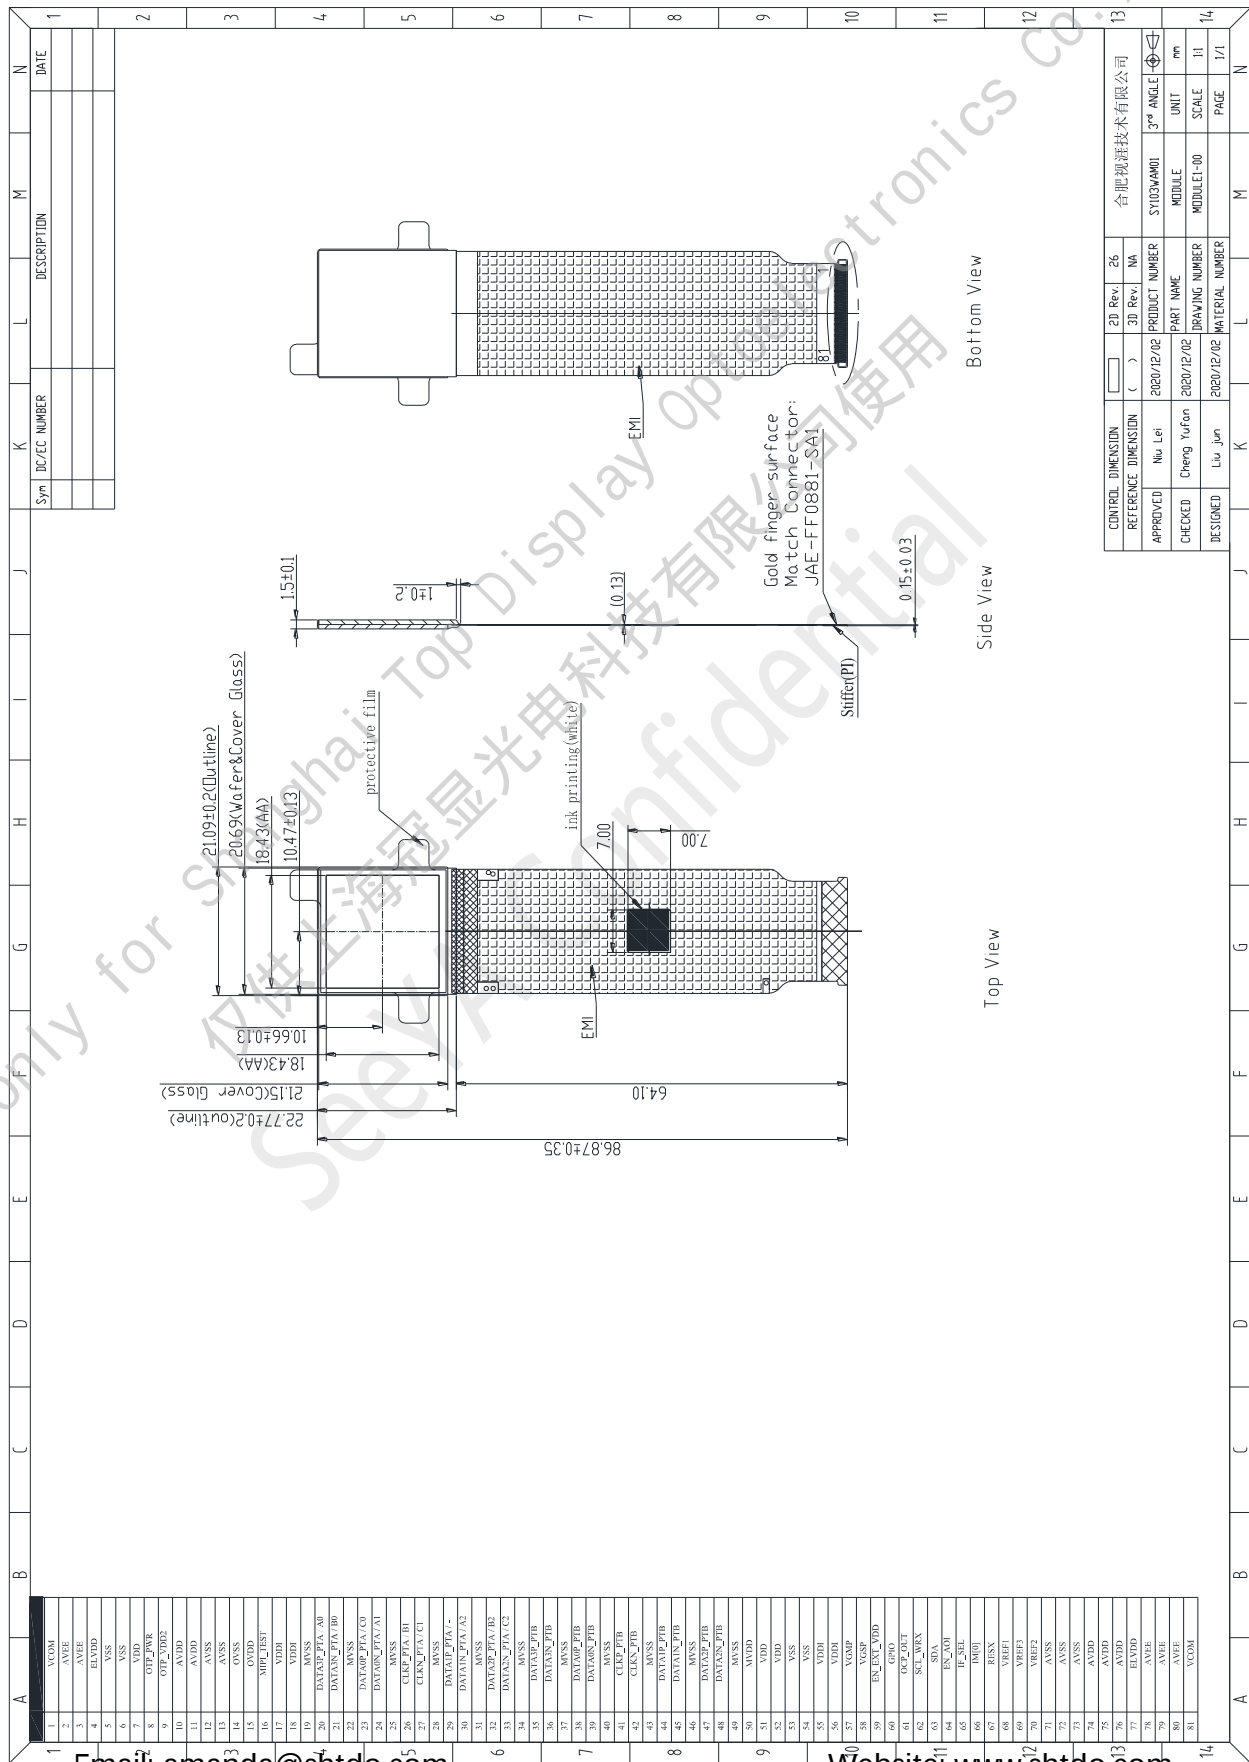



7 Pin Description

7.1 Pin Description

Pin No.	Symbol	Type	Description
1	VCOM	Output	Regulator output for common electrode voltage. connect a capacitor for stabilization, connect a TVS diode to GND.
2	AVEE	Power	-4.0V~-6.0V Power supply for OLED cell. connect a capacitor for stabilization.
3	AVEE	Power	-4.0V~-6.0V Power supply for OLED cell. then connect a capacitor for stabilization.
4	ELVDD	Output	Power supply for OLED cell. connect a capacitor for stabilization.
5	VSS	Power	System GND for internal digital system.
6	VSS	Power	System GND for internal digital system.
7	VDD	Output	Connect a capacitor for stabilization.
8	OTP_PWR	Input	OTP program power. If not use, please connect to GND or OPEN.
9	OTP_VDD2	Output	Regulator output for MTP analog system power. Connect a capacitor for stabilization.
10	AVDD	Power	5.8V~6.0V Power supply for analog system. connect a capacitor for stabilization.
11	AVDD	Power	5.8V~6.0V Power supply for analog system. connect a capacitor for stabilization.
12	AVSS	Power	System GND for analog system.
13	AVSS	Power	System GND for analog system.
14	OVSS	Power	System GND for oscillator.
15	OVDD	Output	Regulator output for common electrode voltage. Connect a capacitor for stabilization.
16	MIPI_TEST	Input/ Output	Test pin for MIPI.
17	VDDI	Power	Power supply for interface system except for the interface.
18	VDDI	Power	Power supply for interface system except for the interface.
19	MVSS	Power	System GND for MIPI interface.
20	DATA3P_PTA	Input/Ou tput	This pin is DSI D3+ signal if MIPI Port A interface is used. DATA3P/N_PTA is differential small amplitude signals. If not used, please keep it open.
21	DATA3N_PTA	Input/Ou tput	This pin is DSI D3- signal if MIPI Port A interface is used. DATA3P/N_PTA is differential small amplitude signals. If not used, please keep it open.
22	MVSS	Power	System GND for MIPI interface.
23	DATA0P_PTA	Input/Ou tput	This pin is DSI D0+ signal if MIPI Port A interface is used. DATA0P/N_PTA is differential small amplitude signals. If not used, please keep it open.
24	DATA0N_PTA	Input/Ou tput	This pin is DSI D0- signal if MIPI Port A interface is used. DATA0P/N_PTA is differential small amplitude signals. If not used, please keep it open.
25	MVSS	Power	System GND for MIPI interface.
26	CLKP_PTA	Input	This pin is DSI CLK+ signal if MIPI Port A interface is used. CLKP/N_PTA is differential small amplitude signals. If not used, please keep it open.
27	CLKN_PTA	Input	This pin is DSI CLK- signal if MIPI Port A interface is used. CLKP/N_PTA is differential small amplitude signals. If not used, please keep it open.
28	MVSS	Power	System GND for MIPI interface.
29	DATA1P_PTA	Input/Ou tput	This pin is DSI D1+ signal if MIPI Port A interface is used. DATA1P/N_PTA is differential small amplitude signals. If not used, please keep it open.

Email: amanda@shtdo.com

Website: www.shtdo.com

Attachment is the exclusive property of SeeYA and shall not be reproduced or copied or transformed to any other format without prior permission of SeeYA. Please handle the information based on Non-Disclosure Agreement.



30	DATA1N_PTA	Input/Output	This pin is DSI D1- signal if MIPI Port A interface is used. DATA1P/N_PTA is differential small amplitude signals. If not used, please keep it open.
31	MVSS	Power	System GND for MIPI interface.
32	DATA2P_PTA	Input/Output	This pin is DSI D2+ signal if MIPI Port A interface is used. DATA2P/N_PTA is differential small amplitude signals. If not used, please keep it open.
33	DATA2N_PTA	Input/Output	This pin is DSI D2- signal if MIPI Port A interface is used. DATA2P/N_PTA is differential small amplitude signals. If not used, please keep it open.
34	MVSS	Power	System GND for MIPI interface.
35	DATA3P_PTB	Input/Output	This pin is DSI D3+ signal if MIPI Port B interface is used. DATA3P/N_PTB is differential small amplitude signals. If not used, please keep it open.
36	DATA3N_PTB	Input/Output	This pin is DSI D3- signal if MIPI Port B interface is used. DATA3P/N_PTB is differential small amplitude signals. If not used, please keep it open.
37	MVSS	Power	System GND for MIPI interface.
38	DATA0P_PTB	Input/Output	This pin is DSI D0+ signal if MIPI Port B interface is used. DATA0P/N_PTB is differential small amplitude signals. If not used, please keep it open.
39	DATA0N_PTB	Input/Output	This pin is DSI D0- signal if MIPI Port B interface is used. DATA0P/N_PTB is differential small amplitude signals. If not used, please keep it open.
40	MVSS	Power	System GND for MIPI interface.
41	CLKP_PTB	Input	This pin is DSI CLK+ signal if MIPI Port B interface is used. CLKP/N_PTB is differential small amplitude signals. If not used, please keep it open.
42	CLKN_PTB	Input	This pin is DSI CLK- signal if MIPI Port B interface is used. CLKP/N_PTB is differential small amplitude signals. If not used, please keep it open.
43	MVSS	Power	System GND for MIPI interface.
44	DATA1P_PTB	Input/Output	This pin is DSI D1+ signal if MIPI Port B interface is used. DATA1P/N_PTB is differential small amplitude signals. If not used, please keep it open.
45	DATA1N_PTB	Power	This pin is DSI D1- signal if MIPI Port B interface is used. DATA1P/N_PTB is differential small amplitude signals. If not used, please keep it open.
46	MVSS	Input/Output	System GND for MIPI interface.
47	DATA2P_PTB	Input/Output	This pin is DSI D2+ signal if MIPI Port B interface is used. DATA2P/N_PTB is differential small amplitude signals. If not used, please keep it open.
48	DATA2N_PTB	Input/Output	This pin is DSI D2- signal if MIPI Port B interface is used. DATA2P/N_PTB is differential small amplitude signals. If not used, please keep it open.
49	MVSS	Power	System GND for MIPI interface.
50	MVDD	Output	Regulator output for MIPI digital system power. Connect a capacitor for stabilization.
51	VDD	Output	Connect a capacitor for stabilization.
52	VDD	Output	Connect a capacitor for stabilization.
53	VSS	Power	System GND for internal digital system.
54	VSS	Power	System GND for internal digital system.
55	VDDI	Power	power supply for interface system except for MIPI interface.
56	VDDI	Power	power supply for interface system except for MIPI interface.
57	VGMP	Output	Regulator output for gamma high voltage generation. Connect a capacitor for stabilization.
58	VGSP	Output	Regulator output for gamma low voltage generation. Connect a capacitor for stabilization.
59	EN_EXT_VDD	Input	Connect to GND.
60	GPIO	Output	Digital global purpose in/out test pin
61	OCP_OUT	Output	Over current protect output flag.

Email: amanda@shtdo.com

Website: www.shtdo.com

Attachment is the exclusive property of SeeYA and shall not be reproduced or copied or transformed to any other format without prior permission of SeeYA. Please handle the information based on Non-Disclosure Agreement.



62	SCL_WRX	Input/ Output	Synchronous clock signal in I2C I/F. If this pin is not used, please connect to VDDI.									
63	SDA	Input/ Output	Bi-direction data PIN in I2C I/F. If this pin is not used, please connect to VDDI.									
64	EN_AOI	Input	Connect to GND.									
65	IF_SEL	Input	Connect to GND.									
66	IM[0]	Input	Use to select the Interface type.									
			<table><tr><td>IM[0]</td><td>Command</td><td>Display Data</td></tr><tr><td>0V</td><td>MIPI</td><td>MIPI</td></tr><tr><td>1.8V</td><td>I2C or MIPI</td><td>MIPI</td></tr></table>	IM[0]	Command	Display Data	0V	MIPI	MIPI	1.8V	I2C or MIPI	MIPI
			IM[0]	Command	Display Data							
			0V	MIPI	MIPI							
1.8V	I2C or MIPI	MIPI										
67	RESX	Input	This signal will reset the device and must be applied to properly initialize the chip. Signal is active low.									
68	VREF1	Output	Regulator output for internal reference voltage. Connect a capacitor for stabilization.									
69	VREF3	Output	Regulator output for internal reference voltage. Connect a capacitor for stabilization. Connect a Schottky diode to GND									
70	VREF2	Output	Regulator output for internal reference voltage. Connect a capacitor for stabilization.									
71	AVSS	Power	System GND for analog system.									
72	AVSS	Power	System GND for analog system.									
73	AVSS	Power	System GND for analog system.									
74	AVDD	Power	5.8V~6.0V Power supply for analog system. connect a capacitor for stabilization.									
75	AVDD	Power	5.8V~6.0V Power supply for analog system. connect a capacitor for stabilization.									
76	AVDD	Power	5.8V~6.0V Power supply for analog system. connect a capacitor for stabilization.									
77	ELVDD	Power	Power supply for OLED cell. connect a capacitor for stabilization.									
78	AVEE	Power	-4.0V~-6.0V Power supply for OLED cell. connect a capacitor for stabilization.									
79	AVEE	Power	-4.0V~-6.0V Power supply for OLED cell. connect a capacitor for stabilization.									
80	AVEE	Power	-4.0V~-6.0V Power supply for OLED cell. connect a capacitor for stabilization.									
81	VCOM	Output	Regulator output for common electrode voltage. connect a capacitor for stabilization, connect a TVS diode to GND.									