

INDUSTRIAL STRENGTH... Start Your Application From YOURITECH

Integration support

Obsolescence Management

Embedded Systems

Human Machine Interface

Touch Solutions

Software

Quality Management

Open Frame Monitors

LCD Controller

Research & Development

Firmware

EMC tests

on-site service

In-house Manufacturing

Cover glass

System solutions

OEM Solutions

Custom Display

PCAP

Mechanical design

Production Custom designs Installation




■ Features

- Landscape, 5.5 inch QVGA resolution.
- High brightness & high color purity and excellent picture quality monitor.
- All-In-One TFT—LCD monitor with built-in backlight, inverter circuit, and LCD driving circuit.
- Built-in brightness control backlight.



■ Dimensions

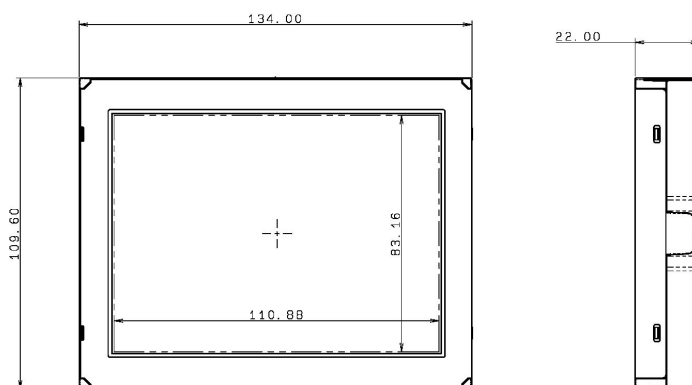

■ Specifications

RoHS compatible

Items	Specifications	Units	Notes
Display Size	13.9(5.5)	cm (inch)	
Display Format	320 X RGB X 240 Stripe	--	
Dot Pitch	115.5(H) X 346.5(V)	μm	
Outline Dimensions	134.0(H) X 109.6(V) X 22.0(D)	mm	
Weight	320.0	g	
Number of Colors	262,144	--	
Brightness	390 (TYP)	cd/m ²	
Viewing Angle(U/D/L/R)	40/55/55/55	deg.	CR ≥ 10
Input Signal Type	Digital RGB signal (6bit parallel)	--	
Power Supplies	3.3/12.0	V	
Operating Temperature	-10 ~ +70	°C	
Storage Temperature	-20 ~ +80	°C	
Backlight	CCFL	--	
Remarks			

※ Specifications are subject to change without notice.

2007.05.07

CASIO COMPUTER CO., LTD.

Hachioji R&D Center Electronic Device Division

2951-5 Ishikawa-machi, Hachioji City, Tokyo 192-8556, Japan
 TEL +81-42-639-5150 FAX +81-42-639-5034
<http://www.casio-device.co.jp>

Contact